

04/28/99



04/28/99

**UTILITY PATENT APPLICATION TRANSMITTAL  
(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.  
NAK1-BG86

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**A PROCESSOR FOR EXECUTING INSTRUCTIONS IN UNITS THAT ARE UNRELATED TO THE UNITS IN WHICH INSTRUCTIONS ARE READ, AND A COMPLIER, AN OPTIMIZATION APPARATUS, AN ASSEMBLER, A LINKER, A DEBUGGER AND A DISASSEMBLER FOR SUCH PROCESSOR**

and invented by:

Shuichi TAKAYAMA, Hajime OGAWA, Kenichi KAWAGUCHI, Nobuo HIGAKI, Kensuke ODANI,  
Tetsuya TANAKA, Shinya MIYAJI and Taketo HEISHI10549 U.S. PRO  
09/301284  
04/28/99

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 139 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☒ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
NAK1-BG86

Total Pages in this Submission

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal                      Number of Sheets \_\_\_\_\_
- b. ☒ Informal                      Number of Sheets                      40
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)*                      ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☐ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail *(Specify Label No.):* EL180744630US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
NAK1-BG86

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*


16. ☐ Additional Enclosures *(please identify below):*

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	48	- 20 =	28	x \$18.00	\$504.00
Indep. Claims	11	- 3 =	8	x \$78.00	\$624.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,888.00

- ☒ A check in the amount of \$1,888.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 16-2462 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Dated: April 28, 1999

Joseph W. Price  
Registration No. 25,124  
PRICE, GESS & UBELL  
2100 S.E. Main Street, Suite 250  
Irvine, California 92614  
Tel: 949-261-8433  
Fax: 949-261-9072

cc:

JOSEPH W. PRICE  
ALBIN H. GESS  
FRANKLIN D. UBELL  
DOYLE B. JOHNSON  
MICHAEL J. MOFFATT  
GORDON E. GRAY III  
BRADLEY D. BLANCHE

## PRICE, GESS & UBELL

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION  
TELEPHONE: (949) 261-8433  
FACSIMILE: (949) 261-9072  
FACSIMILE: (949) 261-1726

e-mail: pgu@pgulaw.com

### SPECIFICATION, CLAIMS AND ABSTRACT

Inventor(s): Shuichi Takayama et al.

Title: A PROCESSOR FOR EXECUTING INSTRUCTIONS IN  
UNITS THAT ARE UNRELATED TO THE UNITS IN WHICH  
INSTRUCTIONS ARE READ, AND A COMPILER, AN  
OPTIMIZATION APPARATUS, AN ASSEMBLER, A LINKER,  
A DEBUGGER AND A DISASSEMBLER FOR SUCH PROCESSOR

Attorney's  
Docket No.: NAK1-BG86

EXPRESS MAIL LABEL NO. EL180744630US

DATE OF DEPOSIT: April 28, 1999

TITLE OF THE INVENTION

A PROCESSOR FOR EXECUTING INSTRUCTIONS IN UNITS THAT  
ARE UNRELATED TO THE UNITS IN WHICH INSTRUCTIONS ARE READ,  
AND A COMPILER, AN OPTIMIZATION APPARATUS, AN ASSEMBLER, A  
5 LINKER, A DEBUGGER AND A DISASSEMBLER FOR SUCH PROCESSOR

This application is based on an application No. H10-  
118326 filed in Japan, the content of which is hereby  
incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a processor for  
executing instructions in units that are unrelated to the  
units in which instructions are read, and a compiler, an  
15 optimization apparatus, an assembler, a linker, a debugger  
and a disassembler for such processor.

2. Description of the Prior Art

Processors conventionally read and execute  
instructions stored in memory according to a program  
counter. Fig. 1 is a block diagram showing the basic  
20 construction of an example processor.

The instruction memory 4301 stores four 8-bit  
25 instructions as one instruction packet.

The program counter 4300 indicates the address of an  
instruction packet in the instruction memory 4301.

The instruction reading unit 4302 reads the instruction packet indicated by the program counter 4300 from the instruction memory 4301.

The instruction executing unit 4303 executes all four instructions included in the read instruction packet in one cycle.

In this way, a conventional processor can read an instruction packet that is indicated by the program counter and can execute four instructions in the instruction packet.

The above processor has to execute all of the instructions in the read instruction packet in one cycle. Accordingly, when one or more instructions in an instruction packet cannot be executed due to problems with computer system resources such as memory or I/O, none of the instructions in the instruction packet can be executed until such problems are resolved. This slows program execution.

## SUMMARY OF THE INVENTION

In view of the stated problems, it is a primary object of the present invention to provide a processor that executes instructions in units that are unrelated to the units in which instructions are read from a program and a program development environment for generating suitable programs.

This primary object is achieved by a processor for

reading instructions from a memory according to a program counter, the memory storing instructions in one-byte units, and for executing the read instructions, the program counter including a first program counter and a second program counter, the first program counter indicating a storage position of a processing packet in the memory, the processing packet being composed of an integer number of the one-byte units, the second program counter indicating a position of processing target instruction in the processing packet, the processing target instruction being an operation to be executed by the processor.

With the stated construction, the first program counter indicates a storage position in the memory of a processing packet whose size is an integer number of bytes. Reads from the memory are performed based on this first program counter. The second program counter can indicate any position of a processing target instruction included in the processing packet read from the memory. As a result, the instruction(s) to be executed can be freely set regardless of the amount of data read in one read operation. This means that instructions whose word length is not an integer number of bytes can be executed even when read operations from the memory to the processor are performed in units of an integer number of bytes.

Here, the processor may include a first program counter updating unit and a second program counter updating unit, the second program counter updating unit incrementing

SECRET  
a value of the second program counter in accordance with an amount of instructions that were executed in a preceding cycle and sending any carry generated in an incrementing to the first program counter updating unit, and the first  
5 program counter updating unit adding the carry received from the second program counter updating unit to the value of the first program counter.

10 With the stated construction, the value of the program counter is incremented by the amount of instructions that have just been executed, so that the program counter can be updated to indicate the first position of the instructions to be executed in the next cycle.

15 Here, the processor may further include: a program counter relative value extracting unit for extracting, when an instruction being executed includes a program counter relative value that is based on an address of a first instruction executed in a present cycle, the program counter relative value; and a calculating unit for adding  
20 the program counter relative value to the value of the first program counter and the value of the second program counter, and setting an addition result as the value of the first program counter and the value of the second program counter.

25 When the processor executes a branch instruction, the value of the program counter is added to a program counter relative value that is a difference in addresses between



the present branch instruction and the branch destination instruction. The result of this addition is then set as the new value of the program counter to have the program counter indicate the branch destination instruction.

5 Here, the calculating unit may include a first calculating unit and a second calculating unit, the second calculating unit adding the value of the second program counter and lower bits of the program counter relative value, setting a result of an addition as the value of the second program counter, and sending any carry generated in the addition to the first calculating unit, and the first calculating unit adding the value of the first program counter, upper bits of the program counter relative value, and any carry received from the second calculating unit, and setting a result of an addition as the value of the first program counter.

When the processor executes a branch instruction and the program counter and a program counter relative value are added, a carry generated when calculating the lower bits is properly considered when calculating the upper bits. In this way, addresses can be calculated with proper continuity between the calculation of the lower bits and the calculation of the upper bits.

Here, the calculating unit may include a first calculating unit and a second calculating unit, the second calculating unit adding the value of the second program counter and lower bits of the program counter relative

value without generating a carry, and setting a result of an addition as the value of the second program counter, the first calculating unit adding the value of the first program counter and upper bits of the program counter relative value, and setting a result of an addition as the value of the first program counter.

When the processor executes a branch instruction, calculation of the lower bits of the value of the program counter and the program counter relative value by the second calculating unit does not generate a carry to the calculation of the upper bits of the value of the program counter and the program counter relative value by the first calculating unit. As a result, the calculations of the first and second calculators can be performed independently of one another, so that a simplified hardware construction can be used.

Here, the calculating unit may add the value of the first program counter and upper bits of the program counter relative value, sets a result of an addition as the value of the first program counter, and sets lower bits of the program counter relative value as the value of the second program counter.

When the processor executes a branch instruction, no calculation using the value of the second program counter and the lower bits of the program counter relative value is required, so that the processor can execute branch instructions at a higher speed.

Here, the calculating unit may add the program counter relative value and a value whose upper bits are the value of the first program counter and lower bits are the value of the second program counter, and sets upper bits of a result of an addition as the value of the first program counter and lower bits of the result as the second program counter.

When the processor executes a branch instruction, the calculation using the value of the program counter and the program counter relative value can be performed by a standard calculator. This means the hardware construction of the processor can be simplified.

Here, the processor may further include: a program counter relative value extracting unit for extracting, when an executed instruction includes a program counter relative value that is based on an address of the executed instruction, the program counter relative value; a program counter amending unit for amending the value of the first program counter and the value of the second program counter to indicate an address of the executed instruction; and a calculating unit for adding the program counter relative value, the value of the first program counter, and the value of the second program counter, and setting a result of an addition as the value of the first program counter and the value of the second program counter.

The program counter relative value is the difference in addresses between a branch instruction and the branch

destination instruction, so that it will not be necessary to change the program counter relative value even when there is a change in the boundaries marking which instructions in the program will be executed in parallel.

5 Here, the processor may further include: a program counter relative value calculating instruction decoding unit for decoding a program counter relative value calculating instruction that performs an addition using a program counter relative value and one of (a) a value of  
10 the program counter stored in a register, and (b) the value of the first program counter and the value of the second program counter; a calculating unit for performing the addition indicated by the program counter relative value calculating instruction to generate an addition result; and  
15 a program counter value updating unit for storing the addition result in one of (a) the register, and (b) the first program counter and the second program counter.

With the stated construction, it is possible to use an instruction that indicates a calculation using the value  
20 of the program counter and a program counter relative value in place of an instruction that stores the absolute address of a function into a register. A program counter relative value has a shorter bit width than the absolute address of an instruction, so that the overall code size can be  
25 reduced. When using PIC codes where the addresses of instructions in memory are only determined when the program is executed, absolute addresses cannot be used, so that

calculation instructions that use the program counter and a program counter relative value are essential.

Here, the first program counter may indicate a memory address, the memory address being a storage position in the memory of a processing packet that is given by bit shifting the value in the first program counter by  $\log_2 n$  bits in a leftward direction,  $n$  being a length of a processing packet in bytes.

With the stated construction, while separate addresses are assigned to each one-byte storage packet in the memory, the value of the first program counter corresponds with the address of a processing packet in the memory. As a result, the processor can easily specify a processing packet in the memory.

Here, the processor may further include: an instruction buffer for temporarily storing instructions; and an instruction reading unit for transferring instructions with a minimum transfer size of one one-byte unit from the memory to the instruction buffer, in accordance with available space in the instruction buffer but regardless of a size of a processing packet.

With the stated construction, the amount of data read by the processor from the memory in one read operation can be freely set, so that the construction in the processor for reading instructions can be made highly flexible.

The stated primary object can also be achieved by an instruction sequence optimizing apparatus, for generating

optimized code from an instruction sequence, including: an address assigning unit for estimating a size of each instruction in the instruction sequence and assigning an address to each instruction, upper bits of each address indicating a memory address at which a processing packet is stored and lower bits of each address indicating a processing target instruction in the processing packet; a label detecting unit (1) for detecting a label, which should be resolved by an address of a specified instruction, from the instruction sequence, and obtaining the address of the specified instruction, and (2) for detecting a label, which should be resolved by a difference in addresses of two specified instructions, from the instruction sequence, and obtaining the addresses of the two specified instructions; a program counter relative value calculating unit for calculating, when a label which should be resolved by a difference in addresses of two specified instructions has been detected, a program counter relative value by subtracting an address of one of the two specified instructions from an address of another of the two specified instructions; a converting unit (1) for converting an instruction that has a label that should be resolved by an address of a specified instruction into an instruction with a size that is based on a size of the address of the specified instruction, (2) for converting an instruction that has a label that should be resolved by a difference in addresses of two specified instructions into

an instruction with a size that is based on a size of the  
program counter relative value calculated from the  
addresses of the two specified instructions; and an  
optimized code generating unit for generating optimized  
code by converting addresses of instructions in accordance  
with the sizes of instructions after conversion by the  
converting unit.

The above construction achieves an optimization  
apparatus for generating programs for a processor that  
executes branch instructions.

Here, the program counter relative value calculating  
unit may include a lower bit subtracting unit and an upper  
bit subtracting unit, the lower bit subtracting unit  
subtracting lower bits of the address of the one of the two  
specified instructions from lower bits of the address of  
the other of the two specified instructions, for setting a  
result of a subtraction as lower bits of the program  
counter relative value, and sending any carry generated in  
the subtraction to the upper bit subtracting unit, and the  
upper bit subtracting unit subtracting upper bits of the  
address of one of the two specified instructions and any  
carry received from the lower bit subtracting unit from  
upper bits of the address of the other of the two specified  
instructions, and for setting a result of a subtraction as  
upper bits of the program counter relative value.

The above construction achieves an optimization  
apparatus for generating programs for a processor which,

when executing a branch instruction, calculates the address of a branch destination instruction using a carry method.

Here, the program counter relative value calculating unit may include a lower bit subtracting unit and an upper bit subtracting unit, the lower bit subtracting unit subtracting lower bits of the address of one of the two specified instructions from lower bits of the address of the other of the two specified instructions without generating a carry and setting a result of a subtraction as lower bits of the program counter relative value, and the upper bit subtracting unit subtracting upper bits of the address of one of the two specified instructions from upper bits of the address of the other of the two specified instructions, and for setting a result of a subtraction as upper bits of the program counter relative value.

The above construction achieves an optimization apparatus for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction without using a carry.

Here, the program counter relative value calculating unit may subtract upper bits of an address of one of the two specified instructions from upper bits of an address of the other of the two specified instructions, set a result of a subtraction as upper bits of the program counter relative value, and set lower bits of the other of the two specified instructions as lower bits of the program counter relative value.



The above construction achieves an optimization apparatus for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction using an absolute value.

The stated primary object can also be achieved by an assembler that generates relocatable code from an instruction sequence, each address of an instruction in the instruction sequence having upper bits that indicate a memory address at which a processing packet is stored and lower bits that indicate a position of processing target instruction that is included in the processing packet, the assembler including: a label detecting unit for detecting a label in the instruction sequence that should be resolved by a difference in addresses between two specified instructions, and obtaining the addresses of the two specified instructions; a program counter relative value calculating unit for calculating a program counter relative value by subtracting an address of one of the two specified instructions from an address of another of the two specified instructions; and a replacing unit for replacing the label with the program counter relative value calculated by the program counter relative value calculating unit.

The above construction achieves an assembler for generating programs for a processor that executes branch instructions.

Here, the program counter relative value calculating unit may include a lower bit subtracting unit and an upper bit subtracting unit, the lower bit subtracting unit subtracting lower bits of the address of the one of the two specified instructions from lower bits of the address of the other of the two specified instructions, for setting a result of a subtraction as lower bits of the program counter relative value, and sending any carry generated in the subtraction to the upper bit subtracting unit, and the upper bit subtracting unit subtracting upper bits of the address of one of the two specified instructions and any carry received from the lower bit subtracting unit from upper bits of the address of the other of the two specified instructions, and for setting a result of a subtraction as upper bits of the program counter relative value.

The above construction achieves an assembler for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction using a carry method.

Here, the program counter relative value calculating unit may include a lower bit subtracting unit and an upper bit subtracting unit, the lower bit subtracting unit subtracting lower bits of the address of one of the two specified instructions from lower bits of the address of the other of the two specified instructions without generating a carry and setting a result of a subtraction as lower bits of the program counter relative value, and the

upper bit subtracting unit subtracting upper bits of the address of one of the two specified instructions from upper bits of the address of the other of the two specified instructions, and for setting a result of a subtraction as upper bits of the program counter relative value.

The above construction achieves an assembler for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction without using a carry.

Here, the program counter relative value calculating unit may subtract upper bits of an address of one of the two specified instructions from upper bits of an address of the other of the two specified instructions, set a result of a subtraction as upper bits of the program counter relative value, and set lower bits of the other of the two specified instructions as lower bits of the program counter relative value.

The above construction achieves an optimization apparatus for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction using an absolute value.

The stated primary object can also be achieved by a linker that generates object code by combining relocatable code, each address of an instruction in the relocatable code having upper bits that indicate a memory address at which a processing packet is stored and lower bits that

indicate a position of processing target instruction that is included in the processing packet, the linker including: a relocation information detecting unit for detecting a label in the relocatable code that should be resolved by a difference in addresses between two specified instructions, and obtaining the addresses of the two specified instructions; a program counter relative value calculating unit for calculating a program counter relative value by subtracting an address of one of the two specified instructions from an address of another of the two specified instructions; and a replacing unit for replacing the label with the program counter relative value calculated by the program counter relative value calculating unit.

The above construction achieves a linker for generating programs for a processor that executes branch instructions.

Here, the program counter relative value calculating unit may include a lower bit subtracting unit and an upper bit subtracting unit, the lower bit subtracting unit subtracting lower bits of the address of the one of the two specified instructions from lower bits of the address of the other of the two specified instructions, for setting a result of a subtraction as lower bits of the program counter relative value, and sending any carry generated in the subtraction to the upper bit subtracting unit, and the upper bit subtracting unit subtracting upper bits of the

address of one of the two specified instructions and any carry received from the lower bit subtracting unit from upper bits of the address of the other of the two specified instructions, and for setting a result of a subtraction as upper bits of the program counter relative value.

The above construction achieves a linker for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction using a carry method.

Here, the program counter relative value calculating unit may include a lower bit subtracting unit and an upper bit subtracting unit, the lower bit subtracting unit subtracting lower bits of the address of one of the two specified instructions from lower bits of the address of the other of the two specified instructions without generating a carry and setting a result of a subtraction as lower bits of the program counter relative value, and the upper bit subtracting unit subtracting upper bits of the address of one of the two specified instructions from upper bits of the address of the other of the two specified instructions, and for setting a result of a subtraction as upper bits of the program counter relative value.

The above construction achieves a linker for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction without using a carry.

Here, the program counter relative value calculating

unit may subtract upper bits of an address of one of the two specified instructions from upper bits of an address of the other of the two specified instructions, set a result of a subtraction as upper bits of the program counter relative value, and set lower bits of the other of the two specified instructions as lower bits of the program counter relative value.

The above construction achieves a linker for generating programs for a processor which, when executing a branch instruction, calculates the address of a branch destination instruction using an absolute value.

The stated primary object can also be achieved by a disassembler that receives an indication of an address of an instruction in object code and outputs an assembler name of the instruction at the indicated address, each address of an instruction in the object code having upper bits that indicate a memory address at which a processing packet is stored and lower bits that indicate a position of processing target instruction that is included in the processing packet, the disassembler including: a program counter relative value extracting unit for extracting, when the indicated instruction includes a program counter relative value, the program counter relative value from the indicated instruction; a label addressing calculating unit for adding an address of the indicated instruction to the extracted program counter relative value and setting an addition result as a label address; a storing unit for

storing a label name corresponding to each label address;  
and a searching unit for searching the storing unit for a  
label name that corresponds to the calculated label address  
and outputting the corresponding label name.

5           The stated construction can disassemble a program  
that includes a branch instruction. When the disassembled  
instruction is a branch instruction, the address of the  
branch destination instruction can be calculated from the  
program counter relative value. This address is then used  
10       to search the label table and so obtain the label name. As  
a result, the branch destination can be displayed to the  
user in the readily understandable form of a label name,  
even when program counter relative values are used in  
branch instructions.

15           Here, the label address calculating unit may include  
a lower bit calculating unit and an upper bit calculating  
unit, the lower bit calculating unit for adding lower bits  
of the address of the indicated instruction and lower bits  
of the program counter relative value, setting a result of  
20       an addition as lower bits of a label address, and sending  
any carry generated by the addition to the upper bit  
calculating unit, and the upper bit calculating unit adding  
upper bits of the address of the indicated instruction,  
upper bits of the program counter relative value, and any  
25       carry received from the lower bit calculating unit, and  
setting a result of the an addition as upper bits of the  
label address.

The above construction achieves a disassembler that can disassemble programs for a processor which, when executing a branch instruction, calculates an address of a branch destination instruction using a carry.

5 Here, the label address calculating unit may include a lower bit calculating unit and an upper bit calculating unit, the lower bit calculating unit adding lower bits of the address of the indicated instruction and lower bits of the program counter relative value without generating a  
10 carry, and setting a result of an addition as lower bits of a label address, and the upper bit calculating unit adding upper bits of the address of the indicated instruction and upper bits of the program counter relative value, and setting a result of an addition as upper bits of the label  
15 address.

The above construction achieves a disassembler that can disassemble programs for a processor which, when executing a branch instruction, calculates an address of a branch destination instruction without using a carry.

20 Here, the label address calculating unit may add upper bits of the address of the indicated instruction and upper bits of the program counter relative value, set a result of an addition as upper bits of the label address, and set lower bits of the program counter relative value as  
25 lower bits of the label address.

The above construction achieves a disassembler that can disassemble programs for a processor which, when



executing a branch instruction, calculates an address of a branch destination instruction using an absolute value.

The stated primary object can also be achieved by a debugger that receives an indication of an address of an instruction in object code and replaces the instruction at the indicated address with a replacement instruction, each address of an instruction in the object code having upper bits that indicate a memory address at which a processing packet is stored and lower bits that indicate a position of processing target instruction that is included in the processing packet, the debugger including: a processing packet reading unit for reading a processing packet that is indicated by upper bits of the indicated address from the memory and writing the processing packet into an instruction buffer; an instruction writing unit for writing the replacement instruction into the processing packet in the instruction buffer over an instruction that is indicated by the lower bits of the indicated address; and a processing packet writing unit for writing the processing packet in the instruction buffer back into the memory after the replacement instruction has been written.

The above construction reads instructions in units of processing packets from a memory that stores instructions in one-byte storage packets, rewrites instructions in an instruction buffer, and writes instructions back into the memory in units of processing packets. This achieves a debugger that can debug instructions whose length is not an

integer number of bytes.

5 The stated primary object can also be achieved by a compiler that generates an instruction sequence from source code, the compiler generating a program counter relative value calculating instruction that is executed by a processor, the program counter relative value calculating instruction being an instruction that performs a calculation using a first value and a program counter relative value and uses a result of the calculation to  
10 update the first value, the first value being one of (a) a value of a program counter stored in a register, and (b) the value stored in a program counter of the processor, wherein upper bits of the first value indicate a memory address at which a processing packet is stored, and lower  
15 bits of the first value of the program counter indicate a processing target instruction that is included in the processing packet.

20 The above construction achieves a compiler that generates programs for a processor that executes program counter relative value calculating instructions.

25 Here, the processor may include a lower bit calculating unit and an upper bit calculating unit, the program counter relative value calculating instruction having the lower bit calculating unit perform a lower bit calculation and the upper bit calculating unit perform an upper bit calculation, the lower bit calculation being an addition using lower bits of the first value and lower bits

of the value of the program counter relative value, where a result of the lower bit calculation is set as the lower bits of the first value and any generated carry is sent to the upper bit calculating unit, and the upper bit calculation being an addition using upper bits of the first value, upper bits of the value of the program counter relative value and any carry received from the lower bit calculating unit, where a result of the upper bit calculation is set as the upper bits of the first value.

The above construction achieves a compiler that generates a program for a processor which, when executing a program counter relative value calculating instruction, performs a calculation using a value of the program counter and the program counter relative value according to a carry method.

Here, the processor may include a lower bit calculating unit and an upper bit calculating unit, the program counter relative value calculating instruction having the lower bit calculating unit perform a lower bit calculation and the upper bit calculating unit perform an upper bit calculation, the lower bit calculation being an addition using lower bits of the first value and lower bits of the value of the program counter relative value that does not generate a carry, where a result of the lower bit calculation is set as the lower bits of the first value, and the upper bit calculation being a calculation using upper bits of the first value and upper bits of the value

of the program counter relative value, where a result of the upper bit calculation is set as the upper bits of the first value.

The above construction achieves a compiler that generates a program for a processor which, when executing a program counter relative value calculating instruction, performs a calculation using a value of the program counter and the program counter relative value without generating a carry.

Here, the processor may includes an upper bit calculating unit, the program counter relative value calculating instruction having the upper bit calculating unit perform an upper bit calculation and setting lower bits of the program counter relative value as lower bits of the first value, and the upper bit calculation being an addition using upper bits of the first value and upper bits of the value of the program counter relative value, where a result of the upper bit calculation is set as the upper bits of the first value.

The above construction achieves a compiler that generates a program for a processor which, when executing a program counter relative value calculating instruction, performs a calculation using a value of the program counter and the program counter relative value according to an absolute value calculating method.

## BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, advantages and features of the invention will become apparent from the following description thereof taken in conjunction with the accompanying drawings which illustrate a specific embodiment of the invention. In the drawings:

Fig. 1 is a block diagram showing the construction of a conventional processor;

Fig. 2A shows the format of one instruction executed by the processor of the first embodiment of the present invention;

Fig. 2B shows the format of another instruction executed by the processor of the first embodiment of the present invention;

Fig. 2C shows the format of another instruction executed by the processor of the first embodiment of the present invention;

Fig. 2D shows the format of another instruction executed by the processor of the first embodiment of the present invention;

Fig. 2E shows the format of another instruction executed by the processor of the first embodiment of the present invention;

Fig. 3A shows an instruction packet that is the unit used for storing and reading instructions in this first embodiment;

Fig. 3B shows the read order of instructions;

Fig. 3C shows the execution order of instructions;

Fig. 4 shows an example of the methods used by a conventional processor to store and read instructions that are not byte-aligned;

5 Fig. 5 shows the procedure by which the object code to be executed by the processor is generated by a compiler, optimization apparatus, assembler, and linker;

Fig. 6 is a block diagram showing the details of the processor 309 and the external memory;

10 Fig. 7 is an increment table showing the rules used to increment the in-packet address;

Fig. 8A is an addition table showing the addition rules used when adding the lower 3 bits of the address of a branch instruction to lower 3 bits of the PC relative value;

15 Fig. 8B is a subtraction table showing the subtraction rules used when subtracting the lower 3 bits of the PC relative value from the lower 3 bits of a branch destination address;

20 Fig. 9 is a block diagram showing the components and input/output data of the optimization apparatus 303;

Fig. 10 is a flowchart showing the operation procedure of the optimization apparatus;

25 Fig. 11 shows part of the optimization processing code 903 generated by the code optimization apparatus 902;

Fig. 12 shows the address assigned codes 916 generated from the optimization processing code 903 shown

in Fig. 11;

Fig. 13 shows the label information 906 generated from the address assigned codes 916 shown in Fig. 12;

Fig. 14 shows the optimized code 304 generated from the address assigned codes 916 shown in Fig. 12;

Fig. 15 is a block diagram that shows the construction of the assembler 305 shown in Fig. 5 and the input/output data related to the assembler 305;

Fig. 16 is a flowchart showing the operation of the assembler;

Fig. 17 shows the machine language codes 803 that are generated from the optimized code 304 shown in Fig. 14;

Fig. 18 shows the label information that is generated from the machine language codes shown in Fig. 17;

Fig. 19 shows the relocatable codes that are generated from the machine language codes 803 shown in Fig. 17;

Fig. 20 is a block diagram showing the construction of the linker 307 and the I/O (input/output) data of the linker 307;

Fig. 21 is a flowchart showing the operation of the linker 307;

Fig. 22 shows the relocatable codes;

Fig. 23 shows the state when the relocatable codes 814 shown in Fig. 19 have been combined with the relocatable code shown in Fig. 22;

Fig. 24 shows the resulting combined codes 703;

Fig. 25 shows the label information that is generated from the combined codes 703 shown in Fig. 24;

Fig. 26 shows the object codes generated from the combined codes 703 shown in Fig. 24;

5 Fig. 27 shows the object code generated by the second embodiment of the present invention;

Fig. 28A shows the construction of an instruction packet in the third embodiment;

10 Fig. 28B shows the types of instructions used in the third embodiment;

Fig. 28C shows the relation between in-packet addresses and the instruction units in a packet;

15 Fig. 29A is an addition table showing the addition rules for adding the lower 3 bits of the address of the branch instruction and the lower 3 bits of the PC relative value in the calculation method of the fourth embodiment that does not use a carry;

20 Fig. 29B is a subtraction table showing the subtraction rules for subtracting the lower 3 bits of the address of the branch instruction from the lower 3 bits of the address of the branch destination instruction in the calculation method of the fourth embodiment that does not use a carry;

25 Fig. 30 shows the object code that is generated by the address calculation method of the fourth embodiment that does not use a carry;

Fig. 31A is an addition table showing the addition



rules for adding the lower 3 bits of the address of the branch instruction and the lower 3 bits of the PC relative value in the calculation method of the fifth embodiment that uses absolute values;

5           Fig. 31B is a subtraction table showing the subtraction rules for subtracting the lower 3 bits of the address of the branch instruction from the lower 3 bits of the address of the branch destination instruction in the calculation method of the fifth embodiment that uses absolute values;

10           Fig. 32 shows the object code that is generated by the above address calculation method of the fifth embodiment that uses absolute values;

15           Fig. 33 shows the object code that has been generated using the linear calculation method of the sixth embodiment;

20           Fig. 34 shows the processor of the seventh embodiment;

25           Fig. 35A shows the operation that corresponds to a PC adding instruction which is shown in mnemonic form;

            Fig. 35B shows the operation that corresponds to a PC subtracting instruction which is shown in mnemonic form;

            Fig. 36 shows the construction of the compiler of the eighth embodiment of the present invention;

30           Fig. 37 is a flowchart showing the operation of the compiler;

            Fig. 38 shows source code which is written in C

language;

Fig. 39 shows the intermediate codes that have been generated from the source program shown in Fig. 38;

Fig. 40 shows the assembler code that has been produced by converting the intermediate codes shown in Fig. 39;

Fig. 41 is a block diagram showing the construction of the debugger and disassembler of the present embodiment;

Fig. 42 is a flowchart showing the operating procedure of a disassembler of the present invention; and

Fig. 43 is a flowchart showing the operation of the debugger of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following is a detailed description of several embodiments of the present invention, with reference to the accompanying drawings.

##### First Embodiment

This first embodiment relates to an optimization apparatus, an assembler, and a linker that generate programs where read operations and execute operations have different units, and to a processor for executing such programs.

## Formats of the Instructions Executed by the Processor

The following explains the formats of the instructions executed by the processor of this first embodiment. These formats are shown in Figs. 2A ~ 2E. The instructions executed by the present processor are constructed so that 21 bits is set as one instruction unit. For the present processor, there are both one-unit (i.e., 21-bit) and two-unit (i.e., 42-bit) instructions.

The format information 101 is written as one bit and shows the length of each instruction. When the format information 101 is "0", this shows that the unit including this format information 101 forms one complete instruction, which is to say, a 21-bit instruction. When the format information 101 is "1", this shows that the unit including this format information 101 and the following unit together form one two-unit instruction, which is to say, a 42-bit instruction.

The parallel execution boundary information 100 is also written as one bit and shows whether a parallel execution boundary exists between the instruction formed by the present unit and the following instruction. When the parallel execution boundary information 100 is "1", this shows that a parallel execution boundary exists between the instruction including this parallel execution boundary information 100 and the following instruction, so that these instructions will be executed in different cycles. When the parallel execution boundary information 100 is

"0", this shows that no parallel execution boundary exists between the instruction including this parallel execution boundary information 100 and the following instruction, so that these instructions will be executed the same cycle.

5           The remaining bits in each instruction are used to show an operation. This means that 19 bits can be used to indicate the operation in a 21-bit instruction and that 40 bits can be used to indicate the operation in a 42-bit instruction. The fields marked "Op1", "Op2", "Op3", and  
10       "Op4" are used to store opcodes that indicate the type of operation to be performed. The field marked "Rs" is used to store the register number of a register used as the source operand and the field marked "Rd" is used to store the register number of a register used as the destination  
15       operand. The fields marked "imm5" and "imm32" are respectively used to store 5-bit and 32-bit immediates that are used in calculations. Finally, the fields marked  
      "disp13" and "disp32" are respectively used to store 13-bit and 32-bit displacements.

20           Transfer instructions and arithmetic instructions that handle long (such as 32-bit) constants and branch instructions that use large displacements are defined as 42-bit instructions. Most other instructions are defined as 21-bit instructions. Of the two units used to compose a  
25       42-bit instruction, the latter unit is only used to store part of the long constant or displacement, and so does not store the opcode of the instruction.

## Reading and Execution of Instructions by the Processor

The following explains the operation of the present processor when reading and executing instructions. Note that the processor of the present embodiment has a premise that static parallel scheduling is used. Fig. 3A shows an instruction packet that is the unit used for storing and reading instructions. Each instruction packet is composed of three instruction units (63 bits) and dummy data (1 bit). In each cycle, the processor reads instructions using this fixed 64-bit packet length. Packets of this size are used because the 21-bit unit size of instruction is not suited to reading from memory. Accordingly, a number of such instructions are read together with dummy data to make the total packet size equal to an integer number of bytes. In this example, since the number of instruction units in each instruction packet is not a power of two, there is the following special effect. This effect overcomes the problems that occur when positions of the units inside instruction packets are expressed using binary. In the following explanation, the three units in an instruction packet are called the first, second and third units in order starting from the unit with the lowest address value.

Fig. 3B shows the read order of instructions. As shown in the figure, one instruction packet is read in each cycle.

Fig. 3C shows the execution order of instructions. In

each cycle, instructions are executed as far as the next parallel execution boundary. This means that the instructions are executed up to and including an instruction whose parallel execution boundary information 100 is "1". Instruction units that are read but not executed are accumulated in the instruction buffer, and are executed in a later cycle.

As described above, the processor of the present embodiments reads instructions using packets of a fixed length, but only executes a suitable number of units in each cycle depending on parallelism of the instructions. The reason that the present processor can start the execution of instructions in one cycle at any of the instruction units in an instruction packet is that an in-packet address specifies an instruction unit in an instruction packet. This is described in more detail later.

Fig. 4 shows an example of the methods used by a conventional processor to store and read instructions that are not byte-aligned. When 21-bit instructions that are not byte-aligned are to be read in byte-units, three unused bits have to be added to the end of each instruction to make the instruction length 24-bits. This means that what are essentially 21-bit instructions are stored into and read from memory in 24-bit units. The length of three of such instructions is 72 bits, so that the storage of three instructions in a 64-bit packet in the present embodiment

reduces overall program size.

Note that while the present embodiment describes the packet construction when 21-bit instructions are used, the invention is not limited to this instruction length. It is equally possible to construct instruction packets of instructions of a different length and to read the instructions using such instruction packets. As one example, when instructions are n-bits long, values of m and r may be selected so as to give a maximum value of  $n*m + (n*m+r)$  subject to  $(n*m+r) \bmod 8 = 0$ . One packet is then composed of m instruction units (each being n bits long) and r-bit dummy data. By doing so, instruction packets can be composed of multiple-byte size using relatively little dummy data.

#### Method for Expressing Instruction Addresses

The following explains the method used to express instruction addresses in the present embodiment. Here, an instruction address refers to the address used to specify the position of a unit and is expressed as 32 bits.

The upper 29-bits of a 32-bit address are used to specify an instruction packet and so are called the "packet address". This packet address is expressed as a 29-bit hexadecimal figure in a format such as "29'h01234567". A value produced by shifting the value of this packet address by 3-bits to the left is the memory address at which the instruction packet is stored.

The lower 3-bits in a 32-bit address are used to specify an instruction unit included in the instruction packet and so are called the "in-packet address". This in-packet address is expressed as a 3-bit binary value in a format such as "3'b001". As examples, the in-packet address "3'b001" specifies the first unit in an instruction packet, the in-packet address "3'b010" specifies the second unit, and the in-packet address "3'b100" specifies the third unit. However, the in-packet addresses are not limited to these specific values. Other values may be used provided that the instruction units in an instruction packet are each specified using their own value.

The indicating of addresses in this embodiment is such that only 3 bits are assigned for eight-bytes of instructions. This gives the same results as when a conventional processor assigns a separate address to each byte, since the upper 29-bits of addresses assigned to eight-bytes of instructions will be the same.

#### Method for Generating the Object Code Executed by the Processor

The following explains the method for generating the object code that is executed by the processor of the present embodiment.

First, the terminology to be used in this explanation is defined.

A "PC relative value" is the difference between the



addresses of two instructions.

A "label" is either an "instruction address-resolved label" or a "PC relative value-resolved label". Absolute address-resolved labels are replaced with absolute addresses of instructions during the processing that converts a program into object code. An example of such a label is the label "L2" in the transfer instruction "mov L2,r1" that transfers an instruction stored in memory to the register r1. PC relative value-resolved labels are replaced with PC relative values during the processing that converts a program into object code. An example of such a label is the label "L1" in the unconditional branch instruction "bra L1" that performs an unconditional branch using the PC relative value. "Local labels" and "external labels" also exist as other types of label. When a label and the instruction including the label are included in the same module (a module being a subprogram composed of an instruction sequence achieving one processing function), such label is called a local label, while when the label and instruction including the label are included in different modules, such label is called an external label.

Fig. 5 shows the procedure by which the object code to be executed by the processor is generated by a compiler, optimization apparatus, assembler, and linker. An overview of the functions of these components is given below.

The compiler 301 analyzes the content of the source code 300 that is written in a high-level language like C

and outputs assembler code 302.

The optimization apparatus 303 assigns temporary addresses to the assembler code 302, links the instruction sequences in groups of three instruction units, and outputs  
5 optimized code 304 as the linked results. In this process, local labels are calculated as PC relative values or instruction addresses. The instruction size, which is to say, whether an instruction should be expressed as a one-unit instruction or as a two-unit instruction, is then  
10 determined based on the value of the PC relative value or the instruction address.

The assembler 305 outputs relocatable codes 306 which it generates from the optimized code 304. This processing converts local labels that should be resolved with PC  
15 relative values into PC relative values.

The linker 307 combines a plurality of modules. That is, the linker 307 combines a plurality of relocatable codes 306 and outputs the resulting object code 308. In this processing, unresolved labels are converted into PC  
20 relative values or instruction addresses.

The processor 309 executes the object code 308.

As described above, a program written in a high-level language is converted by the compiler 301, the optimization apparatus 303, the assembler 305, and the linker 307 into  
25 object code that is in a format executable by the processor. Each label in the program is converted into a PC relative value or an instruction address by one of the

steps in the above procedure. Address resolution for local labels that should be resolved by a PC relative value is performed by the assembler 305. Address resolution for local labels that should be resolved by an instruction address and address resolution for external labels are performed by the linker 307.

The following describes the construction and operation of the processor 309, the linker 307, the assembler 305, and the optimization apparatus 303 shown in Fig. 4.

#### Processor

Fig. 6 is a block diagram showing the details of the processor 309 and the external memory.

The processor 309 is capable of executing a maximum of three instructions in parallel. This processor 309 includes calculators 401a ~ 401c, general registers 402, an upper PC 403, a lower PC 404, an upper PC calculator 411, a lower PC calculator 405, an INC 412, an instruction buffer 408, an prefetch upper counter 410, a prefetch lower counter 413, instruction decoder 409a ~ 409c, a PC relative value selector 420, an immediate selector 421, an operand data buffer 423, and an operand address buffer 422. The external memory includes the data memory 406 and the instruction memory 407.

In the following explanation, the upper PC 403 and the lower PC 404 will be collectively referred to as the

"PC", and the upper PC calculator 411 and the lower PC calculator 405 will be collectively referred to as the "PC calculator".

The first calculator 401a, the second calculator 401b, and the third calculator 401c each perform one calculation. These calculators are capable of calculating at the same time.

The general registers 402 store data, addresses and other data.

The upper PC 403 stores the upper 29 bits of the address of the first instruction in a set of instructions to be executed in the next cycle, which is to say, a packet address.

The lower PC 404 stores the lower 3 bits of the address of the first instruction in a set of instructions to be executed in the next cycle, which is to say, an in-packet address.

The instruction memory 407 stores instructions that are expressed by the object code 308.

The instruction buffer 408 stores instructions that have been read from the instruction memory 407.

The first instruction decoder 409a, the second instruction decoder 409b, and third instruction decoder 409c decode instructions and, if the respective instructions are executable, give indications to other components in the processor to have the instructions executed. The first instruction decoder 409a receives an

input of the first instruction stored in the instruction  
buffer 408, the second instruction decoder 409b an input of  
the next instruction, and the third instruction decoder  
409c an input of a next instruction. These instruction  
5 decoders 409a ~ 409c investigate whether there is a  
parallel execution boundary between the instruction units  
and only have the instructions that should be executed in  
the present cycle executed. As one example, when an  
instruction performs a calculation using a constant, the  
10 constant is sent to the first calculator 401a via the  
immediate selector 421 and the first calculator 401a is  
instructed to perform the calculation. For a branch  
instruction, a PC relative value is sent via the PC  
relative value selector 420 to the lower PC calculator 405  
15 and upper PC calculator 411 that are then instructed to  
update the PC. The instruction decoders 409a ~ 409c send  
control signals showing the number of executed instruction  
units to have the INC 412 update the PC increment, and send  
control signals showing the number of executed instruction  
20 units to the instruction buffer 408 to have the executed  
instruction units deleted from the instruction buffer 408.

The PC relative value selector 420 outputs the PC  
relative value outputted by the instruction decoders 409a ~  
409c to the lower PC calculator 405 and the upper PC  
25 calculator 411.

The immediate selector 421 outputs an immediate  
outputted by the instruction decoders 409a ~ 409c to the

general registers 402 and the calculators 401a ~ 401c.

The INC 412 receives information regarding the number of executed instruction units via control signals sent by the instruction decoders 409a ~ 409c, and increments the value of the upper PC 403 and the lower PC 404 in accordance with this number. By doing so, the INC 412 sets the packet address of the first instruction in the set of instructions to be executed in the next cycle in the upper PC 403 and the in-packet address of the first instruction in the set of instructions to be executed in the next cycle in the lower PC 404.

The upper PC calculator 411 and lower PC calculator 405 respectively update the upper PC 403 and the lower PC 404. When a branch instruction is decoded by the instruction decoders 409a ~ 409c, the upper PC calculator 411 and lower PC calculator 405 respectively receive the upper 29 bits and the lower 3 bits of the PC relative value included in the branch instruction of the PC relative value. The lower PC calculator 405 increases or decreases the present value of the lower PC 404 by the lower 3 bits in the PC relative value and sends the calculation result to the lower PC 404 as the new lower PC. The upper PC calculator 411 increases or decreases the present value of the upper PC 403 by the upper 29 bits in the PC relative value and sends the calculation result to the upper PC 403 as the new upper PC. This operation of the PC calculators is described later in this specification. As described

above, when a branch instruction is executed, the packet address of the branch destination instruction that is to be executed next is set in the upper PC 403 and the in-packet address is set in the lower PC 404. There are also cases where the upper PC calculator 411 and lower PC calculator 405 update the PC by calculating an address using a PC relative value and an address stored in the general registers 402.

The prefetch upper counter 410 shows the upper 29 bits of the address of the first instruction in the set of instructions to be read from the instruction memory 407, which is to say, the packet address. The prefetch upper counter 410 normally increments this value by one in each cycle. When a branch instruction was executed in the previous cycle, the packet address of the branch destination instruction set in the upper PC 403 is sent to the prefetch upper counter 410 where it is set in place of the present value in the prefetch upper counter 410.

The prefetch lower counter 413 shows the lower 3 bits of the address of the first instruction in the set of instructions read from the instruction memory 407, which is to say, the in-packet address. In this embodiment, the value "3'b000" is set in the prefetch lower counter 413. As a result, the instructions to be read are indicated in packet units, so that one packet is sent from the instruction memory 407 to the instruction buffer 408 in each cycle.

The data memory 406 stores operand data.

The operand data buffer 423 and operand address buffer 422 are buffers that are located between the data memory 406 and the processor.

5       The following explains the incrementing method and calculating method for instruction addresses. This is the most characteristic feature of the present embodiment.

#### Incrementing Method for Instruction Addresses

10       The incrementing of addresses is performed by adding an increment value to the in-packet address of an instruction, and adding any carry produced by the addition to the packet address.

15       Fig. 7 is an increment table showing the rules used to increment the in-packet address. As shown in the figure, when the in-packet address is "3'b000" or "3'b010", the incrementing of the instruction address is performed by adding 2 to the in-packet address. When the in-packet address is "3'b100", a carry to the packet address is  
20       produced (which is to say, 1 is to be added to the upper 29 bits of the instruction address) and the in-packet address is updated to "3'b000". This means that the incrementing of the in-packet address is a calculation that cycles through the three values "3'b000", "3'b010", and "3'b100".  
25       As one example, when the increment value is "2" and the value of the in-packet address before incrementing is "3'b100", the packet address after incrementing is "3'b010"



and a carry of "1" to the packet address is generated.

Note that in the present embodiment, the in-packet address does not need to be expressed in binary. This is especially effective when the number of instruction units in an instruction packet is not a power of 2. When this is the case, it is not possible to express the position of an instruction unit in an instruction packet in binary and use a binary calculation to shift the position of an instruction unit. However, in the present embodiment, the position of an instruction unit in an instruction packet is expressed using m different values. By using a calculation that cycles through these m values, the specifying of instruction units and the calculations for shifting the instruction position can be achieved even if the number of instruction units in an instruction packet is not a power of 2.

#### Method for Calculating the Instruction Address

The following explains the carry method which is one of the methods used for calculating the instruction addresses in the present invention. Other methods used to calculate addresses are a separation method, an absolute position indicating method, and a linear addressing method, though these will be described later in this specification. In the carry method, the upper 29 bits and lower 3 bits of an instruction address are calculated separately. However, when calculating the upper bits, any carry to or from the

upper 29 bits that occurred when calculating the lower 3 bits is taken into account.

The following explains the method by which the present processor adds the address of a branch instruction and a PC relative value to find a branch destination address. The lower PC calculator 405 shown in Fig. 6 adds the lower 3 bits of the address of a branch instruction to the lower 3 bits of the PC relative value. Fig. 8A is an addition table showing the addition rules used when adding the lower 3 bits of the address of a branch instruction to lower 3 bits of the PC relative value. As shown in Fig. 8A, this addition of the lower 3-bit values differs from a binary calculation in being a calculation that cycles through the three values "3'b000", "3'b010", and "3'b100". When a carry occurs as shown in Fig. 8A, the lower PC calculator 405 sends the carry to the upper PC value to the upper PC calculator 411.

The upper PC calculator 411 shown in Fig. 6 adds the upper 29 bits of the address of a branch instruction to the upper 29 bits of the PC relative value. When doing so, if the calculation of the lower PC calculator 405 has resulted in a carry to the upper PC, the upper PC calculator 411 also adds this carry. This addition is a normal addition of binary values.

The addition results of the lower PC calculator 405 and upper PC calculator 411 form the address of the branch destination instruction. The addition result for the lower

3 bits is set in the lower PC 404 and the addition result for the upper 29 bits is set in the upper PC 403.

The following explains the calculations of the optimization apparatus 303, assembler 305, and linker 307 for finding the PC relative value, which is to say the subtraction of the branch instruction address from the branch destination address. Like the addition described above, this subtraction is performed separately for the upper 29 bits and lower 3 bits. The lower address subtraction means 907 of the optimization apparatus 303, the lower address subtraction means 806 of the assembler 305, and the lower address subtraction means 706 of the linker 307 subtract the lower 3 bits of the branch instruction address from the lower 3 bits of the branch destination address. Fig. 8B is a subtraction table showing the subtraction rules used when subtracting the lower 3 bits of the PC relative value from the lower 3 bits of a branch destination address. As shown in Fig. 8B, this subtraction of the lower 3-bit values differs from a binary calculation in being a calculation that cycles through the three values "3'b000", "3'b010", and "3'b100". When a carry occurs as shown in Fig. 8B, the lower address subtraction means that performs the calculation (such as lower address subtraction means 907) sends the carry from the upper PC value to the corresponding upper address subtraction means (such as upper address subtraction means 910). The various upper address subtraction means are

described in more detail later.

The upper address subtraction means 910 in the optimization apparatus 303, the upper address subtraction means 809 in the assembler 305, and upper address subtraction means 709 in the linker 307 subtract the upper 29 bits of the address of a branch instruction from the upper 29 bits of the address of the branch destination instruction. When doing so, if the calculation of the lower address subtraction means 907 (or similar) has resulted in a carry from the upper PC, the upper address subtraction means 910 (or similar) also subtracts this carry. This subtraction is a normal subtraction of binary values.

These subtraction results respectively form the lower 3 bits and the higher 29 bits of the PC relative value. This method is also used when the processor finds the address of a branch destination instruction by executing a subtraction on the address of a branch instruction and a PC relative value.

The optimization apparatus 303, assembler 305, and linker 307, which calculate a PC relative value from the difference between the address of a branch destination instruction and the address of a branch instruction, and the processor 309, which calculates the address of a branch destination instruction using this PC relative value, calculate addresses using the same carry method. As a result, when executing a branch instruction, the processor

can correctly calculate the address of a branch destination instruction from the PC relative value. This address calculation method that uses a carry has a feature in that it can calculate addresses perform separate calculations for upper bits and lower bits while maintaining the continuity between the two.

### Optimization Apparatus

Fig. 9 is a block diagram showing the components and input/output data of the optimization apparatus 303 shown in Fig. 5. This optimization apparatus 303 optimizes the assembler code 302 generated by the compiler 301, links the instruction sequences together in packets of three instruction units, and outputs the resulting optimized code 304. The optimization apparatus 303 includes a code optimization apparatus 902, an address assigning means 904, a label detecting means 905, a lower address subtraction means 907, an upper address subtraction means 910, an address difference calculating means 912, and a label information resolving means 914.

The code optimization apparatus 902 optimizes the assembler code 302 and so generates the optimization processing code 903. This processing of the code optimization apparatus 902 is the same as any well-known optimization apparatus, and so will not be described.

The address assigning means 904 estimates an address for each instruction in the optimization processing code

903 produced by the code optimization apparatus 902 and assigned an estimated address to each instruction. These addresses are called provisional addresses in this specification. As a result, the address assigning means 904 outputs the address assigned codes 916.

The label detecting means 905 detects local labels from the address assigned codes 916. On detecting a label that should be resolved by an instruction address, the label detecting means 905 obtains the provisional address of the instruction including this label. Conversely, on detecting a label that should be resolved by a PC relative value, the label detecting means 905 obtains the provisional addresses of the instruction including this label and the branch destination instruction. After this, the label detecting means 905 outputs the label information 906 that shows the instructions that include labels and information on values for resolving these labels.

The lower address subtraction means 907, the upper address subtraction means 910, and the address difference calculating means 912 calculate the PC relative values for labels, in the label information 906, that should be resolved by PC relative values.

The lower address subtraction means 907 subtracts the lower 3 bits of the provisional address of a branch instruction from the lower 3 bits of the provisional address of the branch destination instruction and outputs the resulting carry value 908 and lower subtraction result

909.

The upper address subtraction means 910 subtracts the upper 29 bits of the provisional address of a branch instruction and the carry value 908 calculated by the lower address subtraction means 907 from the upper 29 bits of the provisional address of the branch destination instruction and outputs the resulting upper subtraction result 911.

The address difference calculating means 912 finds the address difference 913 by setting the lower subtraction result 909 calculated by the lower address subtraction means 907 as the lower 3 bits and the upper subtraction result 911 calculated by the upper address subtraction means 910 as the upper 29 bits.

The label information resolving means 914 converts an instruction in the optimization processing code 903 including the present label into an instruction of a suitable size, based on an address that was estimated and assigned by the address assigning means 904 or the address difference 913 found by the address difference calculating means 912. If the assigned address or the address difference 913 can be expressed using no more than 13 bits, the label information resolving means 914 converts the instruction into a 21-bit instruction, or if not the label information resolving means 914 converts the instruction into a 42-bit instruction.

After the labels have been resolved, the label information resolving means 914 links the instruction

sequences into packets of three instruction units and outputs the result as the optimized code 304.

The following describes a specific operation of the optimization apparatus 303.

5        Fig. 10 is a flowchart showing the operation procedure of the optimization apparatus.

First, the code optimization apparatus 902 optimizes the assembler code 302 and generates optimization processing code 903. Part of the optimization processing code 903 generated by the code optimization apparatus 902 is shown in Fig. 11. Of the instructions in Fig. 11, "L1:mov r2,r1" 1000 shows the position of the label L1 and is an instruction that indicates a transfer from register r2 to register r1. The instruction "jsr f" is a function call that performs a relative branch to the label f (an external label). A return from the function call to this address is performed by a "ret" instruction. The instruction "add r0,r4" adds the values of registers r0 and r4 and stores the result in register r4. The instruction "and r1,r3" 1003 calculates a logical AND for the values in register r1 and r3 and stores the result in register r3. The instruction "mov L2,r2" 1004 transfers the address of the instruction located at the label L2 into the register r2. The instruction "ld (r2),r0" 1005 transfers the data stored at the address stored in register r2 into the register r0. The instruction "bra L1" 1006 performs an indirect branch to the label L1 (a local label). Note that



in Fig. 11, the instructions that continue after instruction 1007 have been omitted, though these instructions do not include an instruction located at the label f (step S9001).

5       The address assigning means 904 assigns a provisional address to each instruction in the optimization processing code 903 and so generates address assigned codes 916. Fig. 12 shows the address assigned codes 916 generated from the optimization processing code 903 shown in Fig. 11. In this example, provisional addresses starting from the value "32'b00000800" have been assigned (step S9002).

10       The label detecting means 905 detects local labels in the address assigned codes 916 and outputs label information 906 composed of instructions that include the detected labels and information on the values used to  
15       resolve those labels. Fig. 13 shows the label information 906 that is generated from the address assigned codes 916 shown in Fig. 12. As shown in this figure, label L2 of instruction 1104 is detected as a label that should be  
20       resolved by an instruction address and label L1 is detected as a label that should be resolved by a PC relative value. Information showing the address for resolving the label L2 is appended to the instruction "mov L2,r2" that includes the label L2, and information showing the addresses of the  
25       branch destination instruction and branch instruction to be used for calculating a PC relative value is appended to the instruction "bra L1" that includes the label L1. Note that

since the label f in instruction 1101 is an external label, it is not optimized (steps S9003, S9004).

When the label information 906 includes a label that should be resolved by a PC relative value, processing to calculate this PC relative value is performed. The lower address subtraction means 907 calculates the lower 3 bits of the value shown by the label L1 that is a PC relative value. The lower address subtraction means 907 subtracts the lower 3 bits "3'b010" of the provisional address "32'h00000812" of the branch instruction 1106 from the lower 3 bits "3'b000" of the provisional address "32'h00000800" of the branch destination instruction 1100. As a result, "1" is obtained as the carry value 908, and "3'b100" is obtained as the lower subtraction result 909 (steps S9005, S9006).

The upper address subtraction means 910 calculates the upper 29 bits of the value shown by the label L1 that is a PC relative value. The upper address subtraction means 910 subtracts the upper 29 bits "29'h00000102" of the provisional address of the branch instruction 1106 and the carry value 908 "1" generated by the lower address subtraction means 907 from the upper 29 bits "29'h00000100" of the provisional address of the branch destination instruction 1100. As a result, "29'h1ffffffd" ("-3" in base 10, minus numbers being hereafter shown using a complement) is obtained as the upper subtraction result 911 (step S9007).

The address difference calculating means 912 finds the address difference, which is to say the PC relative value, by setting the lower subtraction result 909 as the lower bits and the upper subtraction result 911 as the upper bits. In this example, the address difference calculating means 912 sets "3'b100" as the lower bits and "29'h1ffffffd" as the upper bits, giving an address difference of "32'hffffffec" (step S9008).

The label information resolving means 914 judges whether the value used to resolve the label in the label information 906 can be expressed by a 13-bit value. The value that resolves the label L2 shown in Fig. 13 is "32'h12345678", so that this value cannot be expressed as a 13-bit value, meaning that instruction 1104 including this label L2 will become a 42-bit instruction. On the other hand, the value used to resolve label L1 is "32'hffffffec", which can be expressed by a 13-bit value. Accordingly, the instruction 1106 that includes label L1 will become a 21-bit instruction (steps S9009, S9010, S9011).

The label information resolving means 914 links the instruction sequences into packets of three instruction units, based on the address assigned codes 916. When doing so, the label information resolving means 914 converts instructions that include labels into instructions of the determined size. Here, one instruction unit is used for 21-bit instructions, and two units are used for 42-bit instructions. After this, the label information resolving

means 914 outputs the instruction sequences that it has converted into packets as the optimized code 304. Fig. 14 shows the optimized code 304 generated from the address assigned codes 916 shown in Fig. 12. In Fig. 14, each row shows the instructions that form one instruction packet, with the marks "||" showing the boundaries between instructions in a packet. Curved brackets "()" are used in this drawing to indicate 42-bit instructions that each occupy two units (step S9012).

As described above, addresses are estimated with a calculation method that uses a carry. In this way, a suitable optimization apparatus for a processor that uses a carry method can be achieved.

Note that the provisional addresses assigned by the address assigning means 904 and the PC relative values calculated by the address difference calculating means 912 are values that are estimated for determining the sizes of all instructions that include labels. There are cases when these estimates differ from the actual values, so that these values are not used hereafter in the processing.

#### Assembler

Fig. 15 is a block diagram that shows the construction of the assembler 305 shown in Fig. 5 and the input/output data related to the assembler 305. This assembler 305 converts the optimized code 304 generated by the optimization apparatus 303 into relocatable codes 306

that have a relocatable address format. The assembler 305 includes a machine language code generating means 802, a label detecting means 804, a lower address subtraction means 806, an upper address subtraction means 809, an address difference calculating means 811, and a label information resolving means 813. The machine language code generating means 802 converts the optimized code 304 into machine language codes 803 that can be executed by the processor 309. However, labels whose values have not been resolved are not converted and are stored in the machine language codes 803 as they are. The machine language code generating means 802 assigns a packet address and an in-packet address to each machine language code. As described later, the labels are later resolved using these addresses.

The label detecting means 804 finds a label that should be resolved by a PC relative value, which is to say, a difference in addresses between two instructions and obtains the addresses of the branch instruction and the branch destination instruction. After this, the label detecting means 804 outputs label information 805 that is composed of the instructions that include labels and the values that resolve these labels.

To resolve the label information 805 obtained by the label detecting means 804, the lower address subtraction means 806, the upper address subtraction means 809, and the address difference calculating means 811 calculate a PC relative value as follows.

5 The lower address subtraction means 806 subtracts the lower 3 bits of the address of a branch instruction from the lower 3 bits of the address of the branch destination instruction and outputs the carry value 807 and the lower subtraction result 808.

10 The upper address subtraction means 809 subtracts the upper 29 bits of the address of a branch instruction and the carry value 807 calculated by the lower address subtraction means 806 from the upper 29 bits of the address of the branch destination instruction and outputs the resulting upper subtraction result 810.

15 The address difference calculating means 811 finds the address difference 812 by setting the lower subtraction result 808 calculated by the lower address subtraction means 806 as the lower 3 bits and the upper subtraction result 810 calculated by the upper address subtraction means 809 as the upper 29 bits.

20 The label information resolving means 813 replaces the labels in the machine language codes 803 with the address differences 812 calculated by the address difference calculating means 811, and outputs the resulting relocatable codes 306.

25 The following explains a specific example of the processing of the assembler 305 on receiving an input of the optimized code 304 of Fig. 14 that has been outputted by the optimization apparatus 303.

Fig. 16 is a flowchart showing the operation of the

assembler.

First, the machine language code generating means 802 converts each packet in the optimized code 304 into machine language codes 803 that are suited to the processor 309.

5 However, the machine language code generating means 802 does not convert labels whose values have not been resolved, so that these labels are stored as they are in the machine language codes 803. After this, the machine language code generating means 802 assigns packet addresses  
10 (hereafter also called "local packet addresses") and in-packet addresses to each instruction in the machine language codes 803. Fig. 17 shows the machine language codes 803 that are generated from the optimized code 304 shown in Fig. 14. Note that the actual machine language codes are expressed in binary as sequences of zeros and  
15 ones, though for ease of understanding these machine language codes are shown in Fig. 17 in mnemonic form. The parallel execution boundary information 100 and the format information 101 will also be clear at this stage, but are  
20 not illustrated to simplify the figure. In Fig. 17, packet addresses (local packet addresses) are assigned starting from the value "29'h00000000". The label f in the instruction "jsr f" in packet 1300, the label L2 in the instruction "mov L2,r2" in packet 1301, and the label L1 in  
25 the instruction "bra L1" in packet 1302 have not yet been resolved, so that these instructions are not converted (steps S1500, S1501).

Next, the label detecting means 804 detects labels, out of the unresolved labels in the machine language codes 803, which are local labels that should be resolved by a PC relative value, and obtains the address of the instruction including the label, which is to say, the branch instruction, and the address of the branch destination instruction. The label detecting means 804 then outputs label information 805 that includes information showing the instruction including the label and the value that resolves the label. Fig. 18 shows the label information 805 that is generated from the machine language codes shown in Fig. 17. Here, label L1 is detected as a local label that should be resolved by a PC relative value, "32'h00000012" is obtained as the address of the branch instruction, and "32'h00000000" is obtained as the address of the branch destination instruction (steps S1502, S1503).

The lower address subtraction means 806 then calculates the lower bits of the value L1 that is a PC relative value. The lower address subtraction means 806 subtracts the lower 3 bits "3'b010" of the address "32'h00000012" of the branch instruction 1409 from the lower 3 bits "3'b000" of the address "32'h00000000" of the branch destination instruction 1401. As a result, "1" is obtained as the carry value 807 and "3'b100" is obtained as the lower subtraction result 808 (step S1504).

Next, the upper address subtraction means 809 calculates the upper bits of the value L1 that is a PC



relative value. The upper address subtraction means 809  
subtracts the upper 29 bits "29'h00000002" of the address  
of the branch instruction 1409 and the carry value 807 "1"  
from the upper 29 bits "29'h00000000" of the address of the  
5 branch destination instruction 1401. As a result,  
"29'h1ffffffd" ("-3" in base 10, minus numbers being  
hereafter shown using a complement) is obtained as the  
upper subtraction result 810 (step S1505).

10 The address difference calculating means 811 finds  
the address difference, which is to say the PC relative  
value, by setting the lower subtraction result 808 as the  
lower bits and the upper subtraction result 810 as the  
upper bits. In this example, the address difference  
calculating means 811 sets "3'b100" as the lower bits and  
15 "29'h1ffffffd" as the upper bits, giving an address  
difference of "32'hffffffec" (step S1506).

20 The label information resolving means 813 judges  
whether the address difference 812 can be expressed by only  
its lower 13 bits. If so, the label information resolving  
means 813 sets the lower 13 bits of the address difference  
812 as the PC relative value, or if not, the label  
information resolving means 813 sets the entire address  
difference 812 as the PC relative value. As a result, a  
label in the machine language codes 803 is converted into a  
25 PC relative value. The address difference that resolves  
label L1 in the label information in Fig. 17 is  
"32'hffffffec", which can be expressed by the lower 13-bit

value "131fec", so that the label L1 in the machine language codes shown in Fig. 17 is converted into the lower 13-bit value. Fig. 19 shows the relocatable codes that are generated from the machine language codes 803 shown in Fig. 17. In Fig. 19, the instruction 1609 has been produced by converting the label L1 into a PC relative value. Fig. 19 shows the parallel execution boundary information 100 and format information 101 of each instruction that had already been established when the machine language codes 803 were outputted, and also shows the unused bit in each instruction packet (steps S1507, S1508, S1509).

As described above, by finding a PC relative value by performing address calculation according to a carry method, an assembler corresponding to a processor that uses a carry method can be realized.

### Linker

Fig. 20 is a block diagram showing the construction of the linker 307 shown in Fig. 5 and the I/O (input/output) data of the linker 307. This linker 307 combines a plurality of relocatable codes 701, determines the addresses of each instruction, and outputs the object code 714 that is executable by the processor 309 and is in absolute address format. The linker 307 includes the code combining means 702, the relocation information detecting means 704, the lower address subtraction means 706, the upper address subtraction means 709, the address difference

calculating means 711, and the relocation information resolving means 713.

5 The code combining means 702 combines a plurality of inputted relocatable codes 701 and determines the addresses of all instructions. The code combining means 702 then resolves the labels that should be resolved by instruction addresses using the determined addresses and outputs the combined codes 703 that result from its operation.

10 The relocation information detecting means 704 searches for external labels that should be resolved by PC relative addresses and obtains the addresses of branch instructions and the branch destination instructions. After doing so, the relocation information detecting means 704 outputs relocation information 705 includes information 15 showing instructions that include labels and values to be used to resolve the labels. To resolve the resulting relocation information 705, the lower address subtraction means 706, the upper address subtraction means 709, and the address difference calculating means 711 calculate PC 20 relative values, as described below.

The lower address subtraction means 706 subtracts the lower 3 bits of the address of the branch instruction from the lower 3 bits of the address of the branch destination instruction, and so generates a carry value 707 and a lower subtraction result 708. 25

The upper address subtraction means 709 subtracts the upper 29 bits of the address of the branch instruction and

the carry value 707 generated by the lower address subtraction means 706 from the upper 29 bits of the address of the branch destination instruction, and so generates the upper subtraction result 710.

5           The address difference calculating means 711 sets the lower subtraction result 708 calculated by the lower address subtraction means 706 as the lower 3 bits and the upper subtraction result 710 calculated by the upper address subtraction means 709 as the upper 29 bits to generate the address difference 712.

10           The relocation information resolving means 713 replaces labels in the combined codes 703 with address differences 712 calculated by the address difference calculating means 711, and outputs the resulting object code 308.

15           The operation of the linker 307 is explained below using an example where the relocatable codes 306 shown in Fig. 19 that have been outputted by the assembler 305 have been inputted.

20           Fig. 21 is a flowchart showing the operation of the linker 307.

25           First, the code combining means 702 combines a plurality of relocatable codes 701. Fig. 23 shows the state when the relocatable codes 814 shown in Fig. 19 have been combined with the relocatable code shown in Fig. 22. The code combining means 702 combines these relocatable codes with the packet address of the first relocatable code

in Fig. 22 as "29'h00000000" and the packet address of the first relocatable code in Fig. 19 as "29'h00000001" (step S2000, S2001).

The addresses of all instructions are determined in this way, so that the code combining means 702 can resolve the addresses of labels that should be resolved by instruction addresses and then output the resulting combined codes 703. Fig. 23 shows that the address of label L2 in instruction 1810 "mov L2,r2" is the starting address of instruction packet 1815. This address has been set at "32'h12345680", so that the code combining means 702 uses this value to replace the label L2. Fig. 24 shows the resulting combined codes 703. In instruction 1910 in Fig. 24, the label L2 has been replaced with this address "32'h12345680" (step S2002).

Next, the relocation information detecting means 704 finds external labels in the combined codes 703 that should be resolved by PC relative values and extracts the addresses of the instructions that include these labels and the addresses of the instructions where these labels are located, which is to say, the addresses of branch instructions and branch destination instructions. After this, the relocation information detecting means 704 outputs relocation information 705 that is composed of information showing the instructions including labels and the values to be used to resolve these labels. Fig. 25 shows the label information that is generated from the

combined codes 703 shown in Fig. 24. Here, label f is found as an external label that should be resolved by a PC relative value, so that "32'h0000000a" is obtained as the address of a branch instruction and "32'h00000000" as the address of the branch destination instruction (steps S2003, S2004).

The lower address subtraction means 706 then calculates the lower bits of the value f that is a PC relative value. The lower address subtraction means 706 subtracts the lower 3 bits "3'b010" of the address "32'h0000000a" of the branch instruction 1906 from the lower 3 bits "3'b000" of the address "32'h00000000" of the branch destination instruction 1901. As a result, "1" is obtained as the carry value 707 and "3'b100" is obtained as the lower subtraction result 708 (step S2005).

Next, the upper address subtraction means 709 calculates the upper bits of the value f that is a PC relative value. The upper address subtraction means 709 subtracts the upper 29 bits "29'h00000002" of the address "32'h0000000a" of the branch instruction 1906 and the carry value 707 "1" from the upper 29 bits "29'h00000000" of the address of the branch destination instruction 1901. As a result, "29'h1ffffffe" is obtained as the upper subtraction result 710 (step S2006).

The address difference calculating means 711 finds the address difference 712, which is to say the PC relative value, by setting the lower subtraction result 708 as the

lower bits and the upper subtraction result 710 as the upper bits. In this example, the address difference calculating means 811 sets "3'b100" as the lower bits and "29'h1ffffffe" as the upper bits, giving an address difference of "32'hffffff4" (step S2007).

Next, the relocation information resolving means 713 converts a label in the combined codes 703 into a PC relative value, setting the lower 13 bits of the address difference 712 as the PC relative value if this address difference 712 can be expressed by the lower 13 bits, or otherwise setting the entire address difference 712 as the PC relative value. The address difference that resolves the label f in the relocation information in Fig. 24 is "32'hffffff4", which can be expressed by the lower 13-bit value "13'h1fff4", so that the label f in the combined codes 703 shown in Fig. 23 is converted into this lower 13-bit value to produce the object code. The resulting object code is shown in Fig. 26. In instruction 2106 in Fig. 26, the label f has been converted into the lower 13-bit value "13'h1fff4" (steps S2008, S2009, S2010).

As described above, the present linker finds PC relative values using an address calculation including a carry, and so is suited to a processor that uses a carry.

#### Specific Operation of the Processor

The following describes the operation of the processor when the object code shown in Fig. 26 has been

stored in the instruction memory 407.

At the start of execution of this object code, the upper PC 403 is set at "29'h00000000" and the lower PC 404 is set at "3'b000". The prefetch upper counter 410 receives an input from the upper PC 403 and so is set at "29'h00000000".

The read of instructions from the instruction memory 407 is performed in packet units according to the value in the prefetch upper counter 410. In detail, instruction packet 2100 that is indicated by the prefetch upper counter 410 is read from the instruction sequence stored in the instruction memory 407 and is stored in the instruction buffer 408. The value of the prefetch upper counter 410 is incremented by one in each cycle, and so here becomes "29'h00000001". Hereafter, an instruction packet indicated by the prefetch upper counter 410 is read from the instruction memory 407 and written into the instruction buffer 408 in each cycle.

The following explains the operations for decoding and executing instructions for the case when instruction packet 2104 is indicated by the upper PC 403 and instruction 2107 in instruction packet 2104 is indicated by the lower PC 404. The instructions stored in the instruction buffer 408 are interpreted by the instruction decoders 409a ~ 409c. The first instruction decoder 409a receives an input of the first unit, unit 2107, in the instruction packet 2104 and investigates whether unit 2107



is a one-unit instruction and whether there is a parallel execution boundary. Since unit 2107 is a one-unit instruction and there is no parallel execution boundary, the second instruction decoder 409b receives an input of the next unit, unit 2109, and investigates whether unit 2109 is a one-unit instruction and whether there is a parallel execution boundary. Since unit 2109 is a one-unit instruction and there is no parallel execution boundary, the third instruction decoder 409c receives an input of the next unit and investigates whether this next unit is a one-unit instruction and whether there is a parallel execution boundary. Since this unit is not a one-unit instruction, the third instruction decoder 409c also receives an input of the following unit. The third instruction decoder 409c then finds that this following unit includes a parallel execution boundary. As a result, the instructions 2107, 2109, and 2110 are executed in parallel.

The first instruction decoder 409a decodes the instruction "add r0,r4" and outputs control signals to the first calculator 401a. The first calculator 401a adds the values of registers r0 and r4 and stores the result in register r4. The second instruction decoder 409b decodes the instruction "and r1,r3" and outputs control signals to the second calculator 401b. The second calculator 401b performs a logical operation on the values of registers r1 and r3, and stores the result in register r3. The third instruction decoder 409c decodes the instruction "mov

32'h12345680,r2" and so has the immediate "32'h12345680" transferred into register r2.

In this case, the instruction decoders 409a ~ 409c inform the INC 412 that a total of four instruction units have been executed. The INC 412 increments the values in upper PC 403 and the lower PC 404 by four units. As a result, the lower PC 404 becomes "3'b000", a carry of two to the upper PC 403 is generated, and the upper PC 403 becomes "29'h00000003". This means that the first instruction to be executed in the next cycle is instruction 2112.

The first instruction decoder 409a receives an input of the first unit, unit 2112, and investigates whether unit 2112 is a one-unit instruction and whether there is a parallel execution boundary. Since unit 2112 is a one-unit instruction and there is no parallel execution boundary, the second instruction decoder 409b receives an input of the next unit, unit 2113, and investigates whether unit 2113 is a one-unit instruction and whether there is a parallel execution boundary. Here, the second instruction decoder 409b finds that unit 2109 is a one-unit instruction and that there is a parallel execution boundary. As a result, the processor 309 finds that instructions 2112 and 2113 can be executed in parallel.

The first instruction decoder 409a decodes the instruction "ld (r2),r0", has the operand data, which has the value in register r2 as the operand address, read from

the data memory 406 and stored in register r0. The second instruction decoder 409b decodes the instruction "bra 13'hlfec", and, since this is a branch instruction, updates the values in the upper PC 403 and lower PC 404 using the address of the branch destination instruction.

First, the address indicated by the upper PC 403 and lower PC 404 is amended. While a PC relative value shows the difference in addresses between a branch instruction and its branch destination instruction, the upper PC 403 and lower PC 404 show the address of the first address to be executed in the same cycle as the branch instruction, so that the upper PC 403 and lower PC 404 are amended so that they indicate the address of the branch instruction. In detail, the INC 412 increments the values of the upper PC 403 and lower PC 404 by one unit to show that the branch instruction 2113 is preceded by one instruction unit, the first instruction 2112. As a result, the lower PC 404 becomes "3'b010" and the upper PC 403 stays at "29'h00000003".

Following this, the upper PC calculator 411 and the lower PC calculator 405 add the PC relative value "13'hlfec" obtained by the second instruction decoder 409b to the upper PC 403 and the lower PC 404. Here, the sign-extended 32-bit value "32'hffffffec" is used as the PC relative value. This addition is split into additions of the upper 29 bits and the lower 3 bits.

The lower PC calculator 405 adds the lower 3 bits

603410-1824060  
"3'b100" of the PC relative value to the value "3'b010" of the lower PC 404. As a result, a carry of one and the lower calculation result "3'b000" are obtained. The lower PC calculator 405 sends the carry to the upper PC  
5 calculator 411, and sends the lower calculation result to the lower PC 404.

Next, the upper PC calculator 411 adds the upper 29 bits "29'h1ffffffd" of the PC relative value and the carry value "1" received from the lower PC calculator 405 to the  
10 value "29'h00000003" of the upper PC 403. The upper PC calculator 411 sends the upper calculation result of "29'h00000001" to the upper PC 403, which sends the value on to the prefetch upper counter 410. As a result of this processing, the prefetch upper counter 410 is set at  
15 "29'h00000001", so that the next instruction packet to be prefetched will be instruction packet 2104. Also, since the upper PC 403 is "29'h00000001" and the lower PC 404 is "3'b000", the first instruction to be executed in the next cycle is instruction 2105.

20 Hereafter, codes in the object code are successively read and executed in the same way, so that no explanation will be given for the other instructions.

This completes the detailed explanation of the constructions of the processor 309, linker 307, assembler  
25 305 and optimization apparatus 303 shown in Fig. 5. A conventional compiler can be used as the compiler 301, so that no explanation of such will be given.

5 Note that while the processor of this embodiment includes three instruction decoders 409a ~ 409c and three calculators 401a ~ 401c, the present invention is not limited to this construction, so that only one instruction decoder and one calculator may be provided. It is also possible for the functions of the optimization apparatus 303 to be incorporated into the compiler 301, and to have the object code 308 generated from the source code 300 by the compiler 301, the assembler 305, and the linker 307.

10 In the present embodiment, the prefetch lower counter 413 was described as having the fixed value of "3'b000", though this need not be the case. As one example, this value may be incremented by one in each cycle. This results in one byte of data being read from the instruction memory 407 and written into the instruction buffer 408 in each cycle.

### Second Embodiment

20 The second embodiment of the present invention relates to a modification of the processor, optimization apparatus, assembler, and linker of the first embodiment. This modification uses a different value as the PC relative value for resolving labels in branch instructions.

25 In the first embodiment, the PC relative value in a branch instruction is a difference in addresses between the branch instruction and the branch destination instruction, while in this second embodiment, the PC relative value in a

branch instruction is a difference between the address of the branch destination instruction and the address of the first instruction in same set of instructions as the branch instruction.

5 In this way, the PC relative value has a slightly different meaning than in the present embodiment. However, if the devices used to generate a program (i.e., the optimization apparatus 303, assembler 305, and linker 307 that calculate the PC relative value) use the same meaning  
10 as the device that executes the program (i.e., a processor that calculates an address based on the PC relative value), the processor will be able to correctly change the program counter to the address of a branch destination instruction when executing a branch instruction.

15 The following explains the optimization apparatus 303, assembler 305, linker 307, and processor.

The label detecting means 905 of the optimization apparatus 303 generates the label information 906 for labels that should be resolved by PC relative values in the  
20 following way. Instead of generating label information after obtaining the provisional addresses of the branch instruction and the branch destination instruction in the same way as in the first embodiment, the label detecting means 905 generates the label information 906 after  
25 obtaining the provisional addresses of the branch destination instruction and the address of the first instruction in the same set of instructions as the branch

instruction. In the same way as in the first embodiment, this label information 906 is then used to calculate the address difference 913 that is the difference between two provisional addresses and is used in the optimized code

5 304. The assembler and linker also operate in this way.

The following describes a specific example of the object code 308 generated in this embodiment.

10 The assembler 305 replaces the label L1 in instruction 1409 in the machine language codes shown in Fig. 17 with the subtraction value "13h'1fff0" produced by subtracting the address "32'h00000010" of instruction 1408, which is the first instruction in same set of instructions as instruction 1409, from the address "32'h00000000" of the branch destination instruction. In the same way, the  
15 linker 307 replaces the label f in instruction 1906 in the combined codes shown in Fig. 24 with the subtraction value "13'h1fff8" produced by subtracting the address "32'h00000008" of the instruction 1907, which is the first instruction in same set of instructions as instruction  
20 1906, from the address "32'h00000000" of the branch destination instruction. Fig. 27 shows that the PC relative value of instruction 2213 differs from that shown in Fig. 26.

25 The following describes the processor of the present embodiment.

The processor 309 executes object code that have been generated as described above. When the processor 309

executes a branch instruction, the PC relative value in the branch instruction is a difference in addresses between the branch destination instruction and the first instruction in same set of instructions as the branch instruction.

5 Accordingly, the processor 309 does not amend the values of the upper PC 403 and lower PC 404, and, in the same way as in the first embodiment, adds the PC relative value to the values in the upper PC 403 and lower PC 404 and updates the values in the upper PC 403 and lower PC 404 using the  
10 addition results. When this processor 309 executes the object code shown in Fig. 27, the execution of instruction 2213 results in the PC relative value "13hlff8" being added to the present PC "32'h00000008", resulting in the PC being updated to "32'h00000000".

15 As described above, the processor of the present embodiment does not need to amend the value of the program counter in the same way as in the first embodiment whenever a branch instruction is executed. The address of a branch destination instruction can instead be obtained by directly  
20 adding a PC relative value to the PC. This reduces the total execution time.

### Third Embodiment

25 The third embodiment of the present invention relates to a processor that can indicate the execution position of an instruction by fully utilizing the lower 3 bits of instruction addresses.



In the first embodiment, the lower 3 bits of the instruction address are used to indicate a position that is one of three units. In the present embodiment, however, full use is made of these 3 bits by having them indicate one of eight units.

Fig. 28A shows the construction of an instruction packet in the present embodiment. This instruction packet is composed of eight instruction units. Each instruction unit in an instruction packet is 8 bits long, so that the total length of one instruction packet is 64 bits. The processor in this embodiment reads one instruction packet (64 bits) in one cycle.

Fig. 28B shows the types of instructions used in this embodiment. Each instruction is composed of 8-bit instruction units, with there being one-, two-, three-, four-, five-, and six-unit instructions.

Fig. 28C shows the relation between in-packet addresses and the instruction units in a packet. In the same way as in the first embodiment, a position in an instruction packet is indicated by the lower 3 bits of an instruction address. As shown in Fig. 28C, the in-packet address "3'b000" indicates the first unit, the in-packet address "3'b001" indicates the second unit, the in-packet address "3'b010" indicates the third unit, the in-packet address "3'b011" indicates the fourth unit, the in-packet address "3'b100" indicates the fifth unit, the in-packet address "3'b101" indicates the sixth unit, the in-packet

address "3'b110" indicates the seventh unit, and the in-  
packet address "3'b111" indicates the eighth unit.

As described above, the processor of the present  
embodiment indicates the execution position of an  
instruction making full use of the lower 3 bits of the  
instruction address. As a result, instructions can be  
executed with a greater variation of execution units for  
one cycle.

#### Fourth Embodiment

The fourth embodiment of the present invention  
relates to a method for calculating instruction addresses  
without using a carry.

The first embodiment teaches a processor for  
executing a program, and an optimization apparatus,  
assembler, and linker for generating a suitable program.  
All of these devices use a common method for calculating an  
instruction address using a carry. This has the effect  
that the processor can correctly generate the address of a  
branch destination instruction using a PC relative value.  
However, this effect can be achieved if the processor,  
optimization apparatus, assembler, and linker use a common  
address calculation method that does not use a carry.  
This present embodiment relates to such a calculation  
method that calculates addresses without using a carry.

This calculation method that does not use a carry  
resembles the calculation method in the first embodiment in

that the calculation of address is performed separately for the upper 29 bits and lower 3 bits. However, the present method differs by not using a carry.

The following explains the method by which the processor finds the address of a branch destination instruction by adding the address of a branch instruction and a PC relative value. The lower PC calculator 405 shown in Fig. 6 adds the lower 3 bits of the address of the branch instruction and the lower 3 bits of the PC relative value. Fig. 29A is an addition table showing the addition rules for adding the lower 3 bits of the address of the branch instruction and the lower 3 bits of the PC relative value in the present calculation method. As shown in the figure, this calculation differs from a normal addition of binary values in that it cycles between the three states "3'b000", "3'b010", and "3'b100". Note that no carry is generated.

The upper PC calculator 411 shown in Fig. 6 adds the upper 29 bits of the address of the branch instruction and the upper 29 bits of the PC relative value. This is a normal addition of binary values.

The results of the above additions form the address of a branch destination instruction. In detail, the addition result for the lower 3 bits is set in the lower PC 404 and the addition result for the upper 29 bits is set in the upper PC 403.

The following explains the method used by the

optimization apparatus, assembler, and linker to calculate the PC relative value, which is to say, to subtract the address of the branch destination instruction from the address of the branch instruction. This subtraction is split into an upper 29 bits and lower 3 bits like the addition performed by the processor. The lower address subtraction means 907 of the optimization apparatus 303, the lower address subtraction means 806 of the assembler 305, and the lower address subtraction means 706 of the linker 307 subtract the lower 3 bits of the address of a branch instruction from the lower 3 bits of the address of the branch destination instruction. Fig. 29B is a subtraction table showing the subtraction rules for subtracting the lower 3 bits of the address of the branch instruction from the lower 3 bits of the address of the branch destination instruction. As shown in the figure, this calculation differs from a normal subtraction of binary values in that it cycles between the three states "3'b000", "3'b010", and "3'b100". Note that no carry is generated.

The upper address subtraction means 910 of the optimization apparatus 303, the upper address subtraction means 809 of the assembler 305, and the upper address subtraction means 709 of the linker 307 subtract the upper 29 bits of the address of the branch instruction from the upper 29 bits of the address of the branch destination instruction. This is a normal subtraction of binary

values.

The PC relative value is then found by setting the result of the above subtraction for the lower 3 bits as the lower 3 bits and the result of the above subtraction for the upper 29 bits as the upper 29 bits.

Fig. 30 shows the object code that is generated by the above address calculation method of the present embodiment that does not use a carry. The PC relative values of instructions 2406 and 2413 differ to those in Fig. 26. The following explains the calculation of the PC relative value of instruction 2406.

The lower address subtraction means 706 subtracts the lower 3 bits "3'b010" of the address of instruction 2406 from the lower 3 bits "3'b000" of the address of instruction 2401 in accordance with the subtraction table shown in Fig. 29B. This produces the lower subtraction result "3'b100".

The upper address subtraction means 709 subtracts the upper 29 bits "29'h00000001" of the address of instruction 2406 from the upper 29 bits "29'h00000000" of the address of instruction 2401. This produces the upper subtraction result "29'h1fffffff".

The address difference calculating means 711 generates the address difference "32'h1ffffffc" by setting the upper subtraction result "29'h1fffffff" as the upper 29 bits and the lower subtraction result "3'b100" as the lower 3 bits.

Caltech

The relocation information resolving means 713 judges that the address difference "32'h1ffffffc" can be expressed by just the lower 13 bits "13'h1ffc" and so replaces a label with this value "13'h1ffc" as a PC relative value to generate instruction 2406.

The processor 309 executes the object code generated as described above. When executing a branch instruction, the processor 309 adds the upper PC 403 and lower PC 404, which have been amended to correctly indicate the branch instruction, to the PC relative value in the branch instruction without generating a carry.

When the processor 309 executes instruction 2406 in the object code shown in Fig. 30, the lower PC calculator 405 adds the amended lower PC 404 "3'b010" and the lower 3 bits "3'b100" of the PC relative value and updates the lower PC 404 to the resulting addition value "3'b000". The upper PC calculator 411 adds the amended upper PC 403 "29'h00000001" and the upper 29 bits "29'h1ffffff" of the PC relative value and updates the lower PC 404 to the resulting addition value "29'h00000000".

As described above, the present calculation method can calculate addresses without a carry being sent between the lower PC calculator 405 and the upper PC calculator 411. This means that address calculation can be performed with a simpler hardware construction.

### Fifth Embodiment

The fifth embodiment of the present invention teaches a method for calculating instruction addresses using absolute values.

5        This calculation method that uses absolute values resembles the calculation method in the first embodiment in that the calculation of address is performed separately for the upper 29 bits and lower 3 bits. However, the present method differs from the carry method in that the value of  
10       the lower 3 bits of an instruction address are set as the lower 3 bits of the calculation result.

      The following explains the method by which the processor finds the address of a branch destination instruction by adding the address of a branch instruction  
15       and a PC relative value. The lower PC calculator 405 shown in Fig. 6 adds the lower 3 bits of the address of the branch instruction and the lower 3 bits of the PC relative value. Fig. 31A is an addition table showing the addition rules for adding the lower 3 bits of the address of the  
20       branch instruction and the lower 3 bits of the PC relative value in the present calculation method that uses absolute values. As shown in the figure, the lower 3 bits of the PC relative value are set as the lower 3 bits of the addition result.

25       The upper PC calculator 411 shown in Fig. 6 adds the upper 29 bits of the address of the branch instruction and the upper 29 bits of the PC relative value. This is a

normal addition of binary values.

The results of the above additions form the address of a branch destination instruction. In detail, the addition result for the lower 3 bits is set in the lower PC 404 and the addition result for the upper 29 bits is set in the upper PC 403.

The following explains the method used by the optimization apparatus 303, assembler 305, and linker 307 to calculate the PC relative value, which is to say, to subtract the address of the branch destination instruction from the address of the branch instruction. This subtraction is split into an upper 29 bits and lower 3 bits, like the addition performed by the processor. The lower address subtraction means 907 of the optimization apparatus 303, the lower address subtraction means 806 of the assembler 305, and the lower address subtraction means 706 of the linker 307 subtract the lower 3 bits of the address of a branch instruction from the lower 3 bits of the address of the branch destination instruction. Fig. 31B is a subtraction table showing the subtraction rules for subtracting the lower 3 bits of the address of the branch instruction from the lower 3 bits of the address of the branch destination instruction in this calculation method that uses absolute values. As shown in the figure, the lower 3 bits of the branch destination address are set as the subtraction result for the lower 3 bits.

The upper address subtraction means 910 of the



optimization apparatus 303, the upper address subtraction means 809 of the assembler 305, and the upper address subtraction means 709 of the linker 307 subtract the upper 29 bits of the address of the branch instruction from the upper 29 bits of the address of the branch destination instruction. This is a normal subtraction of binary values.

The PC relative value is then found by setting the result of the above subtraction for the lower 3 bits as the lower 3 bits and the result of the above subtraction for the upper 29 bits as the upper 29 bits.

Fig. 32 shows the object code that is generated by the above address calculation method of the present embodiment that uses absolute values. The PC relative values of instructions 2606 and 2613 differ to those in Fig. 26. The following explains the calculation of the PC relative value of instruction 2606.

The lower address subtraction means 706 subtracts the lower 3 bits "3'b010" of the address of instruction 2406 from the lower 3 bits "3'b000" of the address of instruction 2401 in accordance with the subtraction table shown in Fig. 31B. This produces the lower subtraction result "3'b000".

The upper address subtraction means 709 subtracts the upper 29 bits "29'h00000001" of the address of instruction 2406 from the upper 29 bits "29'h00000000" of the address of instruction 2401. This produces the upper subtraction

result "29'h1ffffffff".

The address difference calculating means 711 generates the address difference "32'h1ffffffff8" by setting the upper subtraction result "29'h1ffffffff" as the upper 29 bits and the lower subtraction result "3'b000" as the lower 3 bits.

The relocation information resolving means 713 judges that the address difference "32'h1ffffffff8" can be expressed by just the lower 13 bits "13'h1fff8" and so replaces a label with this value "13'h1fff8" as a PC relative value to generate instruction 2606.

The processor 309 executes the object code generated as described above. When executing a branch instruction, the processor 309 adds the upper PC 403 and lower PC 404, which have been amended to correctly indicate the branch instruction, to the PC relative value in the branch instruction using the present absolute value method.

When the processor 309 executes instruction 2606 in the object code shown in Fig. 32, the lower PC calculator 405 adds the amended lower PC 404 "3'b010" and the lower 3 bits "3'b000" of the PC relative value and updates the lower PC 404 to the resulting addition value "3'b000". The upper PC calculator 411 adds the amended upper PC 403 "29'h00000001" and the upper 29 bits "29'h1ffffffff" of the PC relative value and updates the lower PC 404 to the resulting addition value "29'h00000000".

As described above, the present calculation method

can calculate addresses without needing to calculate the lower bits, so that the speed for calculating addresses can be improved.

5     Sixth Embodiment

10     The sixth embodiment of the present invention relates to a linear calculation method for addresses. Unlike the other embodiments, this linear calculation method calculates instruction addresses without splitting the calculation into an upper 29 bits and lower 3 bits.

15     The following explains the present method for finding the address of a branch destination instruction from the address of a branch instruction and a PC relative value. While the processor that uses the carry method is equipped with an upper PC calculator 411 for calculating the upper 29 bits and a lower PC calculator 405 for calculating the lower 3 bits, a processor that uses the present linear calculation method is only equipped with one PC calculator for calculating a 32-bit address. The PC calculator in  
20     this linear calculation method adds a 32-bit address of a branch instruction and a 32-bit PC relative value. This calculation is a normal binary addition.

25     The addition result of the PC calculator is set as the address of the branch destination instruction. This means that the lower 3 bits of the addition result are set in the lower PC 404 and the upper 29 bits of the addition result are set in the upper PC 403.

The following explains the calculation of the PC relative value by the optimization apparatus 303, assembler 305, and linker 307, which is to say, the subtraction of the address of the branch instruction from the address of the branch destination instruction. Like the processor in this embodiment, the optimization apparatus 303, assembler 305, and linker 307 are each provided with only one calculator, the address subtraction means, for calculating a 32-bit address. The address subtraction means in this linear calculation method subtracts the address of a branch instruction from the address of a branch destination instruction. This calculation is a normal binary subtraction. The subtraction result is then set as the PC relative value.

Fig. 33 shows the object code that has been generated using the linear calculation method of the present embodiment. In Fig. 33, the PC relative values in instructions 2706 and 2713 differ to those shown in Fig. 26. The following describes the method for calculating the PC relative value for instruction 2706.

The address subtraction means in the linear calculation method subtracts the 32-bit address "32'h00000000" of instruction 2701 from the 32-bit address "32'h0000000a" of instruction 2706 and so obtains the address difference "32'hfffffff6".

The relocation information resolving means 713 judges that the address difference "32'hfffffff6" can be expressed

by just its lower 13 bits "13'h1fff6", and so replaces the label with "13'h1fff6" as the PC relative value to generate instruction 2706.

The processor 309 executes the object code generated as described above. When executing a branch instruction, the processor 309 adds the upper PC 403 and lower PC 404 that have been amended to indicate the address of the branch instruction to the PC relative value using the present linear calculation method.

When the processor 309 executes instruction 2706 in the object code shown in Fig. 33, the PC calculator in this embodiment adds a 32-bit PC value "32'h0000000a", which has the amended value of the upper PC 403 as the upper 29 bits and the amended value of the lower PC 404 as the lower 3 bits, to the PC relative value "32'hffffff6" and so obtains the addition result "32'h00000000". After this, the PC calculator updates the lower PC 404 to the lower 3 bits "3'b000" of this addition value, and the upper PC 403 to the upper 29 bits "29'h00000000" of this addition value.

In this way, the present linear calculation method can calculate addresses using a standard calculator as the PC calculator. This simplifies the structure of the processor.

#### Seventh Embodiment

The seventh embodiment of the present invention relates to a processor that interprets and executes PC

adding instructions and PC subtracting instructions and to a compiler that generates such instructions.

Fig. 34 shows the processor of the present embodiment. The processor of the present embodiment differs from the processor in the first embodiment in that it further includes a second lower PC calculator 2800 and a second upper PC calculator 2802 and in that the first instruction decoder 2801a, the second instruction decoder 2801b, and the third instruction decoder 2801c are all provided with new functions.

The instruction decoders 2801a ~ 2801c are provided with an extra function for decoding PC adding instructions and PC subtracting instructions. Fig. 35A shows the operation that corresponds to a PC adding instruction which is shown in mnemonic form. As shown in Fig. 35A, a PC adding instruction adds a PC relative value "disp" to the value of the PC that is stored in a register and stores the addition result in the same register. Fig. 35B shows the operation that corresponds to a PC subtracting instruction which is shown in mnemonic form. As shown in Fig. 35B, a PC adding instruction subtracts a PC relative value "disp" from the value of the PC that is stored in a register and stores the subtraction result in the same register.

The second lower PC calculator 2800 and the second upper PC calculator 2802 perform the PC adding instruction and PC subtraction instruction described above, using the same calculation rules as the lower PC calculator 405 and

the upper PC calculator 411 described in the first embodiment.

Fig. 36 shows the construction of the compiler of the present embodiment.

5       The source code 2901 is a program written in a high-level language such as C.

10       The intermediate code converting unit 2902 converts the source code 2901 into intermediate code 2903 which is an internal expression for the compiler. This intermediate code converting unit 2902 is a well-known technology and so will not be described.

15       The PC value adding instruction converting unit 2904 converts each intermediate code in the intermediate code 2903 that adds a value of the PC and a variable into an assembler code 2906 for a PC adding instruction that is shown in Fig. 34.

20       The instruction converting unit 2905 converts the other intermediate codes into assembler code 2906. This instruction converting unit 2905 is a well-known technology and so will not be described.

      The following describes a specific example of the operation of the present compiler. Fig. 37 is a flowchart showing the operation of this compiler.

25       First, the compiler receives an input of source code. Fig. 38 shows source code which is written in C language. In Fig. 38, the external functions g1, g2, g3, and g4 are declared, and the function f is defined as a function that

receives the int-type variable "i". This function f includes code that substitutes the address of function g1 into the pointer fp if the value of "i" is 1, substitutes the address of function g2 into the pointer fp if the value  
5 of "i" is 2, substitutes the address of function g3 into the pointer fp if the value of "i" is 3, substitutes the address of function g4 into the pointer fp if the value of "i" is 4, and finally calls the function indicated by the pointer fp (step 3600).

10 Next, the intermediate code converting unit 2902 converts the source code into intermediate codes. When doing so, the intermediate code converting unit 2902 converts (a) a source code that substitutes a pointer to an external function into a pointer variable into (b) an  
15 intermediate code that adds the difference between the address of the start of present function and the address of the start of the external function to a temporary variable that stores the address of the start of the present function, and substitutes the addition result into the  
20 pointer variable.

Fig. 39 shows the intermediate codes that have been generated from the source program shown in Fig. 38. The intermediate code 3201 shown in Fig. 39 is an intermediate code that has the label f marking the start of the function  
25 and that substitutes the present value of the PC, which is to say, the first address of function f, into the temporary variable tmp. The intermediate code 3202 is intermediate



code that judges whether the value of variable i is not  
"1". The intermediate code 3203 is an intermediate code  
that branches to the label L when the judgement by  
intermediate code 3203 is true, that is, variable i is not  
5 "1". The intermediate code 3204 is executed when variable  
i is "1", and adds a difference, obtained by subtracting a  
first address of function f from the first address of  
function g1, to the temporary variable tmp into which the  
first address of function f has been substituted, and has  
10 the addition result substituted into the variable fp. The  
intermediate code 3205 is an intermediate code that  
branches to the label L.

The intermediate code 3206 includes the label L1, and  
is an intermediate code that judges whether variable i is  
15 not equal to "2". The intermediate code 3207 branches to  
label L2 when the judgement in intermediate code 3206 is  
true, which is to say, when variable i is not "2". The  
intermediate code 3208 is executed when variable i is equal  
to "2", and is an intermediate code that adds a difference,  
20 obtained by subtracting a first address of function f from  
the first address of function g2, to the temporary variable  
tmp into which the first address of function f has been  
substituted, and has the addition result substituted into  
the variable fp. The intermediate code 3209 is an  
25 intermediate code that branches to the label L.

The intermediate code 3210 includes the label L2, and  
is an intermediate code that judges whether variable i is

not equal to "3". The intermediate code 3211 branches to label L3 when the judgement in intermediate code 3210 is true, which is to say, when variable i is not "3". The intermediate code 3212 is executed when variable i is equal to "3", and is an intermediate code that adds a difference, obtained by subtracting a first address of function f from the first address of function g3, to the temporary variable tmp into which the first address of function f has been substituted, and has the addition result substituted into the variable fp. The intermediate code 3213 is an intermediate code that branches to the label L.

The intermediate code 3214 includes the label L4, and is an intermediate code that adds a difference, obtained by subtracting a first address of function f from the first address of function g4, to the temporary variable tmp into which the first address of function f has been substituted, and has the addition result substituted into the variable fp. The intermediate code 3215 includes the label L and is an intermediate code that calls the function indicated by the variable fp.

As described above, the intermediate codes in Fig. 39 do not simply substitute the absolute address of the function g1, g2, g3 or g4 into the variable fp, but instead add a difference between the first address of function f and the first address of one of the functions g1, g2, g3, and g4 to the first address of the function f and substitute the addition result into the variable fp (steps

S3601 ~ S3603).

Next, the PC value adding instruction converting unit 2904 converts the intermediate codes into assembler code. The PC value adding instruction converting unit 2904 searches for intermediate codes that add the value of the PC to a PC relative value and converts such codes into assembler code that uses the second lower PC calculator 2800 and the second upper PC calculator 2802. The instruction converting unit 2905 then converts the remaining intermediate codes into assembler code.

The PC value adding instruction converting unit 2904 ascertains that the operand tmp in intermediate code 3204 in Fig. 39 has been set at the value of the PC by the intermediate code 3201 and that the operator "+" indicates an addition of the value of the PC and a PC relative value, and so converts intermediate code 3204 into the assembler code addpc that performs an addition using the second lower PC calculator 2800 and the second upper PC calculator 2802. In the same way, the PC value adding instruction converting unit 2904 converts intermediate codes 3208, 3212, and 3214 into assembler codes addpc. The other intermediate codes in Fig. 39 are converted into assembler codes by the instruction converting unit 2905.

Fig. 40 shows the assembler code that has been produced by converting the intermediate codes shown in Fig. 39. In Fig. 40, the assembler code 3301 has the label f marking the start of a function and is an instruction that

transfers the value of the PC into register r1. The assembler code 2802 is an instruction that judges whether the constant "1" and the value of register r0 are not equal. The assembler code 3303 is an instruction that

5 branches to label L1 when the judgement in assembler code 2802 is true. The assembler code 3304 has the second lower PC calculator 2800 and the second upper PC calculator 2802 add the PC relative value that is the difference between the first address of function g1 and the first address of

10 function f to the value of the PC which is the first address of function f and is stored in the register r1, and has the result transferred into register r1. The assembler code 3305 is an instruction that branches to the label L.

The assembler code 3306 has the label L1 and is an

15 instruction that judges whether the constant "2" and the value of register r0 are not equal. The assembler code 3307 is an instruction that branches to label L2 when the judgement in assembler code 3306 is true. The assembler code 3308 has the second lower PC calculator 2800 and the

20 second upper PC calculator 2802 add the PC relative value that is the difference between the first address of function g2 and the first address of function f to the value of the PC which is the first address of function f and is stored in the register r1, and has the result

25 transferred into register r1. The assembler code 3309 is an instruction that branches to the label L.

The assembler code 3310 has the label L2 and is an

instruction that judges whether the constant "3" and the value of register r0 are not equal. The assembler code 3311 is an instruction that branches to label L3 when the judgement in assembler code 3310 is true. The assembler  
5 code 3311 has the second lower PC calculator 2800 and the second upper PC calculator 2802 add the PC relative value that is the difference between the first address of function g3 and the first address of function f to the value of the PC which is the first address of function f  
10 and is stored in the register r1, and has the result transferred into register r1. The assembler code 3313 is an instruction that branches to the label L.

The assembler code 3314 has the label L3 and is an instruction that has the second lower PC calculator 2800  
15 and the second upper PC calculator 2802 add the PC relative value that is the difference between the first address of function g4 and the first address of function f to the value of the PC which is the first address of function f and is stored in the register r1, and has the result  
20 transferred into register r1. The assembler code 3315 has the label L and is an instruction that calls the function indicated by register r1. The assembler code 3316 is an instruction that ends the function.

As described above, when there is a source code in  
25 function f that substitutes a pointer to the external function g into a pointer variable, the present compiler does not generate an instruction (such as "mov r1,g") that

transfers the address of the external function g into  
register r1, but instead generates an instruction (addpc g-  
f, r1) that has adds a difference (g-f) in addresses  
between function f and function g to the address of  
5 function f that is stored in register r1, and has the  
result transferred into register r1. Since the value of  
the PC relative value g-f is smaller than the absolute  
address g, the overall code size of programs can be reduced  
by using such addpc instructions. This has a further  
10 benefit for PIC codes where the addresses of a program in  
memory are determined when the program is executed, since  
calculation instructions that use such PC relative values  
must be used.

In the same way as in the first embodiment, the  
15 assembler code produced by the compiler of the present  
embodiment is converted into object code that can be  
executed by the processor by an optimization apparatus 303,  
an assembler 305 and a linker 307. The processor executes  
the PC adding instruction "addpc g-f,r1" in the generated  
20 object code using the second lower PC calculator 2800 and  
the second upper PC calculator 2802. In detail, the second  
lower PC calculator 2800 adds the lower 3 bits of the  
constant "g-f" and the lower 3 bits of the value stored in  
register r1 and sends any carry that is generated to the  
25 second upper PC calculator 2802. The second upper PC  
calculator 2802 adds the upper 29 bits of the constant "g-  
f", the upper 29 bits of the value stored in register r1,

and any carry it has received from the second lower PC  
calculator 2800. A value given by setting the addition  
result of the second lower PC calculator 2800 as the lower  
3 bits and the addition result of the second upper PC  
calculator 2802 as the upper 29 bits is then set in  
register r1.

Note that while the instructions shown in Fig. 35A  
and 35B respectively are an addition and a subtraction of a  
constant and the value in a register, this need not be the  
case. An addition and a subtraction of values in  
registers, or an addition and a subtraction of a value in a  
register and the PC may equally be used.

The calculation method used by the second lower PC  
calculator 2800 and the second upper PC calculator 2802  
also need not be the carry method used in the first  
embodiment. Provided the same method is used by the  
optimization apparatus 303, assembler 305, and linker 307  
that generate the object code to be executed by the  
processor, any of a no-carry method, a linear method, and  
an absolute value method may be used.

#### Eighth Embodiment

The eighth embodiment of the present invention  
relates to a debugger and a disassembler.

Fig. 41 is a block diagram showing the construction  
of the debugger and disassembler of the present embodiment.

The input control unit 4000 receives an input from

the user and controls the other components according to this input.

The packet address specifying unit 4001 calculates the upper 29 bits of the address of the inputted instruction.

The in-packet address specifying unit 4002 calculates the lower 3 bits of the address of the inputted instruction.

The instruction memory 4004 stores the instructions to be processed by the debugger and disassembler. As in the first embodiment, the addresses of instructions are 32 bits in length and are composed of a packet address as the upper 29 bits and an in-packet address as the lower 3 bits. Fig. 41 shows how the instructions shown in Fig. 25 are stored.

The instruction reading unit 4003 reads an instruction packet indicated by the packet address specified by the packet address specifying unit 4001 from the instruction memory 4004.

The instruction buffer 4005 stores the instruction packet read from the instruction memory 4004 by the instruction reading unit 4003.

The instruction decoding unit 4006 extracts the instruction unit with the in-packet address specified by the in-packet address specifying unit 4002 from the instruction buffer 4005 and decodes the extracted instruction unit. When the instruction unit is a branch



instruction, the instruction decoding unit 4006 sends the PC relative value 4007 to the lower PC calculator 4008 and the upper PC calculator 4009.

The label table 4011 is a table storing each label name associated with a corresponding instruction address. This label table 4011 is generated by extracting information from the optimized code when the assembler described in the first embodiment generates machine language codes.

In Fig. 41, the address "32'h00000000" corresponds to the label f, the address "32'h00000008" corresponds to the label L1, and the address "32'h12345680" corresponds to the label L2.

The display unit 4012 displays the results of a disassembling of an instruction.

The instruction replacing unit 4013 writes the instruction that has been replaced into the instruction unit(s) in the instruction buffer 4005 that is/are indicated by the in-packet address specified by the in-packet address specifying unit 4002.

The instruction writing unit 4014 rewrites the instruction packet in the instruction memory 4004 with the packet address specified by the packet address specifying unit 4001 using the amended instruction packet stored in the instruction buffer 4005.

The upper PC calculator 4009 performs a calculation on the upper 29 bits of the instruction address specified



specifies the in-packet address from the lower 3 bits of the instruction address and informs the instruction decoding unit 4006 of the instruction unit that has the specified in-packet address. The instruction decoding unit 4006 then extracts the indicated instruction unit from the instruction buffer 4005. In this example, "3'b010" is specified as the in-packet address and the instruction "bra 13'hlfec" that is the second unit in the instruction buffer 4005 is inputted into the instruction decoding unit 4006 (step S4102).

The instruction decoding unit 4006 judges whether the inputted instruction is a branch instruction. In this example, the inputted instruction "bra 13'hlfec" is a branch instruction, so that this judgement is true (step S4103).

When the instruction is a branch instruction, a calculation is performed on the PC relative value 4007 indicated in the instruction and address of the inputted instruction. The lower PC calculator 4008 performs an addition or a subtraction on the in-packet address of the inputted instruction and on the lower 3 bits of the PC relative value 4007 and sends the calculation result to the label search unit 4010. The upper PC calculator 4009 performs an addition or a subtraction on the packet address of the inputted instruction and on the upper 29 bits of the PC relative value 4007 and sends the calculation result to the label search unit 4010. The label search unit 4010

specifies the address of a label from the calculation result for the upper bits and the calculation result for the lower bits. In this example, the label address "32'h00000008" is specified by a calculation using the address "32'h0000001a" of the inputted instruction and the PC relative value 4007 "13'hlfec" (steps S4103, S4104).

The label search unit 4010 then refers to the label table 4011 and finds the label name that has the specified address. In this example, the label L1 corresponds to the address "32'h00000008" (Step S4107).

The display unit 4012 displays the assembler name of the branch instruction and the label name found by the label search unit 4010. In this example, the display unit 4012 displays the assembler name "bra" of the branch instruction and the corresponding label name "Label L1" (Step S4108).

The instruction decoding unit 4006 has the display unit 4012 display only the assembler name when the extracted instruction is not an assembler instruction (Step S4109).

The following describes a specific example of the operation of the present debugger.

Fig. 43 is a flowchart showing the operation of the present debugger.

First, the input control unit 4000 receives a command indicating the debugging of an instruction, the address of an instruction to be replaced, and the instruction to be

used to replace of this instruction. In this specific example, the input control unit 4000 receives "32'h0000001a" as the instruction address and the subtraction instruction "sub r0,r1" as the replacement instruction (step S4200).

Next, the packet address specifying unit 4001 specifies the packet address from the upper 29 bits of the instruction address. The instruction reading unit 4003 then reads the instruction packet with the specified packet address from the instruction memory 4004 and stores it in the instruction buffer 4005. In this example, "29'h00000003" is specified as the packet address, and the instruction sequence "ld (r2),r0||bra 13'hlfec||add r2,r3" is stored in the instruction buffer 4005 (step S4201).

The in-packet address specifying unit 4002 then specifies the in-packet address from the lower 3 bits of the instruction address. In this example, the in-packet address "3'b010" is specified (step S4202).

If the specified in-packet address is "3'b000", the first unit in the instruction packet in the instruction buffer 4005 is replaced with the inputted replacement instruction. If the specified in-packet address is "3'b010", the second unit in the instruction packet in the instruction buffer 4005 is replaced with the inputted replacement instruction. If the specified in-packet address is "3'b100", the third unit in the instruction packet in the instruction buffer 4005 is replaced with the

inputted replacement instruction. In this example, the specified in-packet address is "3'b010", so that the instruction "bra 13'hlfec" in the second unit in the instruction packet in the instruction buffer 4005 is replaced with the inputted replacement instruction "sub r0,r1". As a result, the instruction packet in the instruction buffer 4005 becomes "ld (r2),r0||sub r0,r1||add r2,r3" (steps S4203 ~ S4207).

The instruction writing unit 4014 replaces the instruction packet at the indicated packet address in the instruction memory 4004 with the instruction packet stored in the instruction buffer 4005. In this example, the instruction packet "ld (r2),r0||bra 13'hlfec||add r2,r3" at the packet address "29'h00000003" in the instruction memory 4004 is replaced with the instruction packet "ld (r2),r0||sub r0,r1||add r2,r3" in the instruction buffer 4005.

As described above, the disassembler of the present embodiment can disassemble instructions that are executable for the processor 309 of the first embodiment. When an instruction is disassembled, instead of just displaying the PC relative value, the disassembler has the upper PC calculator and lower PC calculator calculate the address at which the label is located, uses the address to search the label table, and so displays the appropriate label name.

The debugger of the present embodiment reads instructions from the memory in units of instruction

packets that are byte-aligned, rewrites an instruction in the instruction buffer, and writes the instructions back into the memory in units of instruction packets. This method is suited to the debugging of instructions that are not byte-aligned.

Note that the calculation methods used by the lower PC calculator and the upper PC calculator do not need to be the carry method described in the first embodiment, so that another method, such as a separation method, an absolute value method, or a linear method, can be used.

The compiler, optimization apparatus, assembler, linker, processor, disassembler, and debugger of the present invention have been explained by way of the first to eighth embodiments of the present invention, though it should be obvious that the present invention is not limited to these. Two example modifications are given below.

(1) In the first to sixth embodiments, the assembler code 302, the optimized code 304, the relocatable codes 306, and the object code 308 may be stored in a mask ROM, a semiconductor memory such as flash memory, a magnetic storage medium such as a floppy disk or a hard disk, or an optical disc such as a CD-ROM or DVD.

(2) In the seventh embodiment, the assembler codes 2906 may be stored in a mask ROM, a semiconductor memory such as

flash memory, a magnetic storage medium such as a floppy disk or a hard disk, or an optical disc such as a CD-ROM or DVD.

Although the present invention has been fully  
5 described by way of examples with reference to accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Therefore, unless such changes and modifications depart from the scope of the present invention, they should be  
10 construed as being included therein.



What is claimed is:

1 1. A processor for reading instructions from a memory  
2 according to a program counter, the memory storing  
3 instructions in one-byte units, and for executing the read  
4 instructions,

5 the program counter including a first program counter  
6 and a second program counter,

7 the first program counter indicating a storage  
8 position of a processing packet in the memory, the  
9 processing packet being composed of an integer number of  
10 the one-byte units,

11 the second program counter indicating a position of  
12 processing target instruction in the processing packet, the  
13 processing target instruction being an operation to be  
14 executed by the processor.

1 2. The processor of Claim 1, including a first program  
2 counter updating means and a second program counter  
3 updating means,

4 the second program counter updating means  
5 incrementing a value of the second program counter in  
6 accordance with an amount of instructions that were  
7 executed in a preceding cycle and sending any carry  
8 generated in an incrementing to the first program counter  
9 updating means, and

10 the first program counter updating means adding the  
11 carry received from the second program counter updating

means to the value of the first program counter.

3. The processor of Claim 2, further including:

program counter relative value extracting means for extracting, when an instruction being executed includes a program counter relative value that is based on an address of a first instruction executed in a present cycle, the program counter relative value; and

calculating means for adding the program counter relative value to the value of the first program counter and the value of the second program counter, and setting an addition result as the value of the first program counter and the value of the second program counter.

4. The processor of Claim 3,

wherein the calculating means includes a first calculating unit and a second calculating unit,

the second calculating unit adding the value of the second program counter and lower bits of the program counter relative value, setting a result of an addition as the value of the second program counter, and sending any carry generated in the addition to the first calculating unit,

the first calculating unit adding the value of the first program counter, upper bits of the program counter relative value, and any carry received from the second calculating unit, and setting a result of an addition as

14 the value of the first program counter.

1 5. The processor of Claim 3,

2 wherein the calculating means includes a first  
3 calculating unit and a second calculating unit,

4 the second calculating unit adding the value of the  
5 second program counter and lower bits of the program  
6 counter relative value without generating a carry, and  
7 setting a result of an addition as the value of the second  
8 program counter,

9 the first calculating unit adding the value of the  
10 first program counter and upper bits of the program counter  
11 relative value, and setting a result of an addition as the  
12 value of the first program counter.

1 6. The program counter of Claim 3,

2 wherein the calculating means adds the value of the  
3 first program counter and upper bits of the program counter  
4 relative value, sets a result of an addition as the value  
5 of the first program counter, and sets lower bits of the  
6 program counter relative value as the value of the second  
7 program counter.

1 7. The processor of Claim 3,

2 wherein the calculating means adds the program  
3 counter relative value and a value whose upper bits are the  
4 value of the first program counter and lower bits are the

value of the second program counter, and sets upper bits of a result of an addition as the value of the first program counter and lower bits of the result as the second program counter.

8. The processor of Claim 2, further including:

program counter relative value extracting means for extracting, when an executed instruction includes a program counter relative value that is based on an address of the executed instruction, the program counter relative value;

program counter amending means for amending the value of the first program counter and the value of the second program counter to indicate an address of the executed instruction; and

calculating means for adding the program counter relative value, the value of the first program counter, and the value of the second program counter, and setting a result of an addition as the value of the first program counter and the value of the second program counter.

9. The processor of Claim 2, further including:

program counter relative value calculating instruction decoding means for decoding a program counter relative value calculating instruction that performs an addition using a program counter relative value and one of

(a) a value of the program counter stored in a register, and

8 (b) the value of the first program counter and the  
9 value of the second program counter;  
10 calculating means for performing the addition  
11 indicated by the program counter relative value calculating  
12 instruction to generate an addition result; and  
13 program counter value updating means for storing the  
14 addition result in one of  
15 (a) the register, and  
16 (b) the first program counter and the second program  
17 counter.

1 10. The processor of Claim 1,  
2 wherein the first program counter indicates a memory  
3 address, the memory address being a storage position in the  
4 memory of a processing packet that is given by bit shifting  
5 the value in the first program counter by  $\log_2 n$  bits in a  
6 leftward direction,  $n$  being a length of a processing packet  
7 in bytes.

1 11. The processor of Claim 10, further including  
2 an instruction buffer for temporarily storing  
3 instructions; and  
4 instruction reading means for transferring  
5 instructions with a minimum transfer size of one one-byte  
6 unit from the memory to the instruction buffer, in  
7 accordance with available space in the instruction buffer  
8 but regardless of a size of a processing packet.

12. An instruction sequence optimizing apparatus, for  
generating optimized code from an instruction sequence,  
comprising:

address assigning means for estimating a size of each  
instruction in the instruction sequence and assigning an  
address to each instruction, upper bits of each address  
indicating a memory address at which a processing packet is  
stored and lower bits of each address indicating a  
processing target instruction in the processing packet;

label detecting means

(1) for detecting a label, which should be resolved  
by an address of a specified instruction, from the  
instruction sequence, and obtaining the address of  
the specified instruction, and

(2) for detecting a label, which should be resolved  
by a difference in addresses of two specified  
instructions, from the instruction sequence, and  
obtaining the addresses of the two specified  
instructions;

program counter relative value calculating means for  
calculating, when a label which should be resolved by a  
difference in addresses of two specified instructions has  
been detected, a program counter relative value by  
subtracting an address of one of the two specified  
instructions from an address of another of the two  
specified instructions;

27 converting means  
28 (1) for converting an instruction that has a label  
29 that should be resolved by an address of a  
30 specified instruction into an instruction with a  
31 size that is based on a size of the address of the  
32 specified instruction,

33 (2) for converting an instruction that has a label  
34 that should be resolved by a difference in  
35 addresses of two specified instructions into an  
36 instruction with a size that is based on a size of  
37 the program counter relative value calculated from  
38 the addresses of the two specified instructions;  
39 and

40 optimized code generating means for generating  
41 optimized code by converting addresses of instructions in  
42 accordance with the sizes of instructions after conversion  
43 by the converting means.

1 13. The instruction sequence optimizing apparatus of Claim  
2 12,

3 wherein the program counter relative value  
4 calculating means includes a lower bit subtracting unit and  
5 an upper bit subtracting unit,

6 the lower bit subtracting unit subtracting lower bits  
7 of the address of the one of the two specified instructions  
8 from lower bits of the address of the other of the two  
9 specified instructions, for setting a result of a

10 subtraction as lower bits of the program counter relative  
11 value, and sending any carry generated in the subtraction  
12 to the upper bit subtracting unit, and

13 the upper bit subtracting unit subtracting upper bits  
14 of the address of one of the two specified instructions and  
15 any carry received from the lower bit subtracting unit from  
16 upper bits of the address of the other of the two specified  
17 instructions, and for setting a result of a subtraction as  
18 upper bits of the program counter relative value.

1 14. The instruction sequence optimizing apparatus of Claim  
2 12,

3 wherein the program counter relative value  
4 calculating means includes a lower bit subtracting unit and  
5 an upper bit subtracting unit,

6 the lower bit subtracting unit subtracting lower bits  
7 of the address of one of the two specified instructions  
8 from lower bits of the address of the other of the two  
9 specified instructions without generating a carry and  
10 setting a result of a subtraction as lower bits of the  
11 program counter relative value, and

12 the upper bit subtracting unit subtracting upper bits  
13 of the address of one of the two specified instructions  
14 from upper bits of the address of the other of the two  
15 specified instructions, and for setting a result of a  
16 subtraction as upper bits of the program counter relative  
17 value.



1 15. The instruction sequence optimizing apparatus of Claim  
2 12,

3 wherein the program counter relative value  
4 calculating means subtracts upper bits of an address of one  
5 of the two specified instructions from upper bits of an  
6 address of the other of the two specified instructions,  
7 sets a result of a subtraction as upper bits of the program  
8 counter relative value, and sets lower bits of the other of  
9 the two specified instructions as lower bits of the program  
10 counter relative value.

1 16. An assembler that generates relocatable code from an  
2 instruction sequence, each address of an instruction in the  
3 instruction sequence having upper bits that indicate a  
4 memory address at which a processing packet is stored and  
5 lower bits that indicate a position of processing target  
6 instruction that is included in the processing packet,

7 the assembler comprising:

8 label detecting means for detecting a label in the  
9 instruction sequence that should be resolved by a  
10 difference in addresses between two specified instructions,  
11 and obtaining the addresses of the two specified  
12 instructions;

13 program counter relative value calculating means for  
14 calculating a program counter relative value by subtracting  
15 an address of one of the two specified instructions from an

16 address of another of the two specified instructions; and  
17 replacing means for replacing the label with the  
18 program counter relative value calculated by the program  
19 counter relative value calculating means.

1 17. The assembler of Claim 16,

2 wherein the program counter relative value  
3 calculating means includes a lower bit subtracting unit and  
4 an upper bit subtracting unit,

5 the lower bit subtracting unit subtracting lower bits  
6 of the address of the one of the two specified instructions  
7 from lower bits of the address of the other of the two  
8 specified instructions, for setting a result of a  
9 subtraction as lower bits of the program counter relative  
10 value, and sending any carry generated in the subtraction  
11 to the upper bit subtracting unit, and

12 the upper bit subtracting unit subtracting upper bits  
13 of the address of one of the two specified instructions and  
14 any carry received from the lower bit subtracting unit from  
15 upper bits of the address of the other of the two specified  
16 instructions, and for setting a result of a subtraction as  
17 upper bits of the program counter relative value.

1 18. The assembler of Claim 16,

2 wherein the program counter relative value  
3 calculating means includes a lower bit subtracting unit and  
4 an upper bit subtracting unit,

5           the lower bit subtracting unit subtracting lower bits  
6 of the address of one of the two specified instructions  
7 from lower bits of the address of the other of the two  
8 specified instructions without generating a carry and  
9 setting a result of a subtraction as lower bits of the  
10 program counter relative value, and

11           the upper bit subtracting unit subtracting upper bits  
12 of the address of one of the two specified instructions  
13 from upper bits of the address of the other of the two  
14 specified instructions, and for setting a result of a  
15 subtraction as upper bits of the program counter relative  
16 value.

1   19. The assembler of Claim 16,

2           wherein the program counter relative value  
3 calculating means subtracts upper bits of an address of one  
4 of the two specified instructions from upper bits of an  
5 address of the other of the two specified instructions,  
6 sets a result of a subtraction as upper bits of the program  
7 counter relative value, and sets lower bits of the other of  
8 the two specified instructions as lower bits of the program  
9 counter relative value.

1   20. A linker that generates object code by combining  
2 relocatable code, each address of an instruction in the  
3 relocatable code having upper bits that indicate a memory  
4 address at which a processing packet is stored and lower

bits that indicate a position of processing target instruction that is included in the processing packet, the linker comprising:

relocation information detecting means for detecting a label in the relocatable code that should be resolved by a difference in addresses between two specified instructions, and obtaining the addresses of the two specified instructions;

program counter relative value calculating means for calculating a program counter relative value by subtracting an address of one of the two specified instructions from an address of another of the two specified instructions; and

replacing means for replacing the label with the program counter relative value calculated by the program counter relative value calculating means.

21. The linker of Claim 20,

wherein the program counter relative value calculating means includes a lower bit subtracting unit and an upper bit subtracting unit,

the lower bit subtracting unit subtracting lower bits of the address of the one of the two specified instructions from lower bits of the address of the other of the two specified instructions, for setting a result of a subtraction as lower bits of the program counter relative value, and sending any carry generated in the subtraction to the upper bit subtracting unit, and

ORIGINAL TEXT

12 the upper bit subtracting unit subtracting upper bits  
13 of the address of one of the two specified instructions and  
14 any carry received from the lower bit subtracting unit from  
15 upper bits of the address of the other of the two specified  
16 instructions, and for setting a result of a subtraction as  
17 upper bits of the program counter relative value.

1 22. The linker of Claim 20,

2 wherein the program counter relative value  
3 calculating means includes a lower bit subtracting unit and  
4 an upper bit subtracting unit,

5 the lower bit subtracting unit subtracting lower bits  
6 of the address of one of the two specified instructions  
7 from lower bits of the address of the other of the two  
8 specified instructions without generating a carry and  
9 setting a result of a subtraction as lower bits of the  
10 program counter relative value, and

11 the upper bit subtracting unit subtracting upper bits  
12 of the address of one of the two specified instructions  
13 from upper bits of the address of the other of the two  
14 specified instructions, and for setting a result of a  
15 subtraction as upper bits of the program counter relative  
16 value.

1 23. The linker of Claim 20,

2 wherein the program counter relative value  
3 calculating means subtracts upper bits of an address of one

4 of the two specified instructions from upper bits of an  
 5 address of the other of the two specified instructions,  
 6 sets a result of a subtraction as upper bits of the program  
 7 counter relative value, and sets lower bits of the other of  
 8 the two specified instructions as lower bits of the program  
 9 counter relative value.

1 24. A disassembler that receives an indication of an  
 2 address of an instruction in object code and outputs an  
 3 assembler name of the instruction at the indicated address,  
 4 each address of an instruction in the object code having  
 5 upper bits that indicate a memory address at which a  
 6 processing packet is stored and lower bits that indicate a  
 7 position of processing target instruction that is included  
 8 in the processing packet,

9 the disassembler comprising:

10 program counter relative value extracting means for  
 11 extracting, when the indicated instruction includes a  
 12 program counter relative value, the program counter  
 13 relative value from the indicated instruction;

14 label addressing calculating means for adding an  
 15 address of the indicated instruction to the extracted  
 16 program counter relative value and setting an addition  
 17 result as a label address;

18 storing means for storing a label name corresponding  
 19 to each label address; and

20 searching means for searching the storing means for a

21 label name that corresponds to the calculated label address  
22 and outputting the corresponding label name.

1 25. The disassembler of Claim 24,

2 wherein the label address calculating means includes  
3 a lower bit calculating unit and an upper bit calculating  
4 unit,

5 the lower bit calculating unit for adding lower bits  
6 of the address of the indicated instruction and lower bits  
7 of the program counter relative value, setting a result of  
8 an addition as lower bits of a label address, and sending  
9 any carry generated by the addition to the upper bit  
10 calculating unit, and

11 the upper bit calculating unit adding upper bits of  
12 the address of the indicated instruction, upper bits of the  
13 program counter relative value, and any carry received from  
14 the lower bit calculating unit, and setting a result of the  
15 an addition as upper bits of the label address.

1 26. The disassembler of Claim 24,

2 wherein the label address calculating means includes  
3 a lower bit calculating unit and an upper bit calculating  
4 unit,

5 the lower bit calculating unit adding lower bits of  
6 the address of the indicated instruction and lower bits of  
7 the program counter relative value without generating a  
8 carry, and setting a result of an addition as lower bits of

9 a label address, and  
10 the upper bit calculating unit adding upper bits of  
11 the address of the indicated instruction and upper bits of  
12 the program counter relative value, and setting a result of  
13 an addition as upper bits of the label address.

1 27. The disassembler of Claim 24, wherein  
2 the label address calculating means adds upper bits  
3 of the address of the indicated instruction and upper bits  
4 of the program counter relative value, sets a result of an  
5 addition as upper bits of the label address, and sets lower  
6 bits of the program counter relative value as lower bits of  
7 the label address.

1 28. A debugger that receives an indication of an address of  
2 an instruction in object code and replaces the instruction  
3 at the indicated address with a replacement instruction,  
4 each address of an instruction in the object code having  
5 upper bits that indicate a memory address at which a  
6 processing packet is stored and lower bits that indicate a  
7 position of processing target instruction that is included  
8 in the processing packet,

9 the debugger comprising:

10 processing packet reading means for reading a  
11 processing packet that is indicated by upper bits of the  
12 indicated address from the memory and writing the  
13 processing packet into an instruction buffer;



14 instruction writing means for writing the replacement  
15 instruction into the processing packet in the instruction  
16 buffer over an instruction that is indicated by the lower  
17 bits of the indicated address; and

18 processing packet writing means for writing the  
19 processing packet in the instruction buffer back into the  
20 memory after the replacement instruction has been written.

1 29. A compiler that generates an instruction sequence from  
2 source code,

3 the compiler generating a program counter relative  
4 value calculating instruction that is executed by a  
5 processor, the program counter relative value calculating  
6 instruction being an instruction that performs a  
7 calculation using a first value and a program counter  
8 relative value and uses a result of the calculation to  
9 update the first value, the first value being one of

10 (a) a value of a program counter stored in a  
11 register, and

12 (b) the value stored in a program counter of the  
13 processor,

14 wherein upper bits of the first value indicate a  
15 memory address at which a processing packet is stored, and  
16 lower bits of the first value of the program counter  
17 indicate a processing target instruction that is included  
18 in the processing packet.

2025 RELEASE UNDER E.O. 14176

1 30. The compiler of Claim 29,  
 2 wherein the processor includes a lower bit  
 3 calculating unit and an upper bit calculating unit,  
 4 the program counter relative value calculating  
 5 instruction having the lower bit calculating unit perform a  
 6 lower bit calculation and the upper bit calculating unit  
 7 perform an upper bit calculation,  
 8 the lower bit calculation being an addition using  
 9 lower bits of the first value and lower bits of the value  
 10 of the program counter relative value, where a result of  
 11 the lower bit calculation is set as the lower bits of the  
 12 first value and any generated carry is sent to the upper  
 13 bit calculating unit, and  
 14 the upper bit calculation being an addition using  
 15 upper bits of the first value, upper bits of the value of  
 16 the program counter relative value and any carry received  
 17 from the lower bit calculating unit, where a result of the  
 18 upper bit calculation is set as the upper bits of the first  
 19 value.

1 31. The compiler of Claim 29,  
 2 wherein the processor includes a lower bit  
 3 calculating unit and an upper bit calculating unit,  
 4 the program counter relative value calculating  
 5 instruction having the lower bit calculating unit perform a  
 6 lower bit calculation and the upper bit calculating unit  
 7 perform an upper bit calculation,





66240-132700

that should be resolved by an address of a specified instruction into an instruction with a size that is based on a size of the address of the specified instruction,

(2) for converting an instruction that has a label that should be resolved by a difference in addresses of two specified instructions into an instruction with a size that is based on a size of the program counter relative value calculated from the addresses of the two specified instructions; and

an optimized code generating step for generating optimized code by converting addresses of instructions in accordance with the sizes of instructions after conversion in the converting step.

34. The computer-readable recording medium of Claim 33, wherein the program counter relative value calculating step includes a lower bit subtracting substep and an upper bit subtracting substep, the lower bit subtracting substep subtracting lower bits of the address of the one of the two specified instructions from lower bits of the address of the other of the two specified instructions, for setting a result of a subtraction as lower bits of the program counter relative value, and sending any carry generated in the subtraction to the upper bit subtracting substep, and the upper bit subtracting substep subtracting upper

13 bits of the address of one of the two specified  
14 instructions and any carry received from the lower bit  
15 subtracting substep from upper bits of the address of the  
16 other of the two specified instructions, and for setting a  
17 result of a subtraction as upper bits of the program  
18 counter relative value.

1 35. The computer-readable recording medium of Claim 33,  
2 wherein the program counter relative value  
3 calculating step includes a lower bit subtracting substep  
4 and an upper bit subtracting substep,  
5 the lower bit subtracting substep subtracting lower  
6 bits of the address of one of the two specified  
7 instructions from lower bits of the address of the other of  
8 the two specified instructions without generating a carry  
9 and setting a result of a subtraction as lower bits of the  
10 program counter relative value, and  
11 the upper bit subtracting substep subtracting upper  
12 bits of the address of one of the two specified  
13 instructions from upper bits of the address of the other of  
14 the two specified instructions, and for setting a result of  
15 a subtraction as upper bits of the program counter relative  
16 value.

1 36. The computer-readable recording medium of Claim 33,  
2 wherein the program counter relative value  
3 calculating step subtracts upper bits of an address of one

4 of the two specified instructions from upper bits of an  
5 address of the other of the two specified instructions,  
6 sets a result of a subtraction as upper bits of the program  
7 counter relative value, and sets lower bits of the other of  
8 the two specified instructions as lower bits of the program  
9 counter relative value.

1 37. A computer-readable recording medium storing an  
2 assembler program that generates relocatable code from  
3 optimized code that have been generated from an instruction  
4 sequence, each address of an instruction in the optimized  
5 code having upper bits that indicate a memory address at  
6 which a processing packet is stored and lower bits that  
7 indicate a position of processing target instruction that  
8 is included in the processing packet,

9 the assembler program comprising:

10 a label detecting step for detecting a label in the  
11 instruction sequence that should be resolved by a  
12 difference in addresses between two specified instructions,  
13 and obtaining the addresses of the two specified  
14 instructions;

15 a program counter relative value calculating step for  
16 calculating a program counter relative value by subtracting  
17 an address of one of the two specified instructions from an  
18 address of another of the two specified instructions; and

19 a replacing step for replacing the label with the  
20 program counter relative value calculated by the program

21 counter relative value calculating step.

1 38. The computer-readable recording medium of Claim 37,  
 2 wherein the program counter relative value  
 3 calculating step includes a lower bit subtracting substep  
 4 and an upper bit subtracting substep,  
 5 the lower bit subtracting substep subtracting lower  
 6 bits of the address of the one of the two specified  
 7 instructions from lower bits of the address of the other of  
 8 the two specified instructions, for setting a result of a  
 9 subtraction as lower bits of the program counter relative  
 10 value, and sending any carry generated in the subtraction  
 11 to the upper bit subtracting substep, and  
 12 the upper bit subtracting substep subtracting upper  
 13 bits of the address of one of the two specified  
 14 instructions and any carry received from the lower bit  
 15 subtracting substep from upper bits of the address of the  
 16 other of the two specified instructions, and for setting a  
 17 result of a subtraction as upper bits of the program  
 18 counter relative value.

1 39. The computer-readable recording medium of Claim 37,  
 2 wherein the program counter relative value  
 3 calculating step includes a lower bit subtracting substep  
 4 and an upper bit subtracting substep,  
 5 the lower bit subtracting substep subtracting lower  
 6 bits of the address of one of the two specified





7 position of processing target instruction that is included  
8 in the processing packet,

9 the linker program comprising:

10 a relocation information detecting step for detecting  
11 a label in the relocatable code that should be resolved by  
12 a difference in addresses between two specified  
13 instructions, and obtaining the addresses of the two  
14 specified instructions;

15 a program counter relative value calculating step for  
16 calculating a program counter relative value by subtracting  
17 an address of one of the two specified instructions from an  
18 address of another of the two specified instructions; and

19 a replacing step for replacing the label with the  
20 program counter relative value calculated by the program  
21 counter relative value calculating step.

1 42. The computer-readable recording medium of Claim 41,

2 wherein the program counter relative value  
3 calculating step includes a lower bit subtracting substep  
4 and an upper bit subtracting substep,

5 the lower bit subtracting substep subtracting lower  
6 bits of the address of the one of the two specified  
7 instructions from lower bits of the address of the other of  
8 the two specified instructions, for setting a result of a  
9 subtraction as lower bits of the program counter relative  
10 value, and sending any carry generated in the subtraction  
11 to the upper bit subtracting substep, and

the upper bit subtracting substep subtracting upper bits of the address of one of the two specified instructions and any carry received from the lower bit subtracting substep from upper bits of the address of the other of the two specified instructions, and for setting a result of a subtraction as upper bits of the program counter relative value.

1 43. The computer-readable recording medium of Claim 41,

2            wherein the program counter relative value  
3        calculating step includes a lower bit subtracting substep  
4        and an upper bit subtracting substep,

5           the lower bit subtracting substep subtracting lower  
6 bits of the address of one of the two specified  
7 instructions from lower bits of the address of the other of  
8 the two specified instructions without generating a carry  
9 and setting a result of a subtraction as lower bits of the  
10 program counter relative value, and

the upper bit subtracting substep subtracting upper bits of the address of one of the two specified instructions from upper bits of the address of the other of the two specified instructions, and for setting a result of a subtraction as upper bits of the program counter relative value.

1 44. The computer-readable recording medium of Claim 41,

2 wherein the program counter relative value

calculating step subtracts upper bits of an address of one of the two specified instructions from upper bits of an address of the other of the two specified instructions, sets a result of a subtraction as upper bits of the program counter relative value, and sets lower bits of the other of the two specified instructions as lower bits of the program counter relative value.

45. A computer-readable recording medium storing a compiler program that generates an instruction sequence from source code,

the compiler program generating a program counter relative value calculating instruction that is executed by a processor, the program counter relative value calculating instruction being an instruction that performs a calculation using a first value and a program counter relative value and uses a result of the calculation to update the first value, the first value being one of

(a) a value of a program counter stored in a register, and

(b) the value stored in a program counter of the processor,

wherein upper bits of the first value indicate a memory address at which a processing packet is stored, and lower bits of the first value of the program counter indicate a processing target instruction that is included in the processing packet.

46. The computer-readable recording medium of Claim 45,  
 wherein the processor includes a lower bit  
 calculating unit and an upper bit calculating unit,  
 the program counter relative value calculating  
 instruction having the lower bit calculating unit perform a  
 lower bit calculation and the upper bit calculating unit  
 perform an upper bit calculation,  
 the lower bit calculation being an addition using  
 lower bits of the first value and lower bits of the value  
 of the program counter relative value, where a result of  
 the lower bit calculation is set as the lower bits of the  
 first value and any generated carry is sent to the upper  
 bit calculating unit, and  
 the upper bit calculation being an addition using  
 upper bits of the first value, upper bits of the value of  
 the program counter relative value and any carry received  
 from the lower bit calculating unit, where a result of the  
 upper bit calculation is set as the upper bits of the first  
 value.

47. The computer-readable recording medium of Claim 45,  
 wherein the processor includes a lower bit  
 calculating unit and an upper bit calculating unit,  
 the program counter relative value calculating  
 instruction having the lower bit calculating unit perform a  
 lower bit calculation and the upper bit calculating unit



## ABSTRACT OF THE DISCLOSURE

When a branch instruction is decoded by the  
5 instruction decoders 409a ~ 409c, the upper 29 bits of the  
PC relative value included in the branch instruction are  
sent to the upper PC calculator 411 and the lower 3 bits  
are sent to the lower PC calculator 405. The lower PC  
calculator 405 adds the lower 3 bits of the PC relative  
10 value and the lower 3 bits of the present lower PC 404 and  
sends the result to the lower PC 404 as the updated lower  
PC. The upper PC calculator 411 adds the upper 29 bits of  
the PC relative value, the upper 29 bits of the present  
upper PC 403, and a carry that may be received from the  
15 lower PC calculator 405, and sends the result to the upper  
PC 403 as the updated upper PC.

JOSEPH W. PRICE  
ALBIN H. GESS  
FRANKLIN D. UBELL  
DOYLE B. JOHNSON  
MICHAEL J. MOFFATT  
GORDON E. GRAY III  
BRADLEY D. BLANCHE

## PRICE, GESS & UBELL

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION  
TELEPHONE (949) 261-8433  
FACSIMILE (949) 261-9072  
FACSIMILE (949) 261-1726

e-mail: pgu@pgulaw.com

### DRAWINGS (40 SHEETS)

Inventor(s): Shuichi Takayama et al.

Title: A PROCESSOR FOR EXECUTING INSTRUCTIONS IN  
UNITS THAT ARE UNRELATED TO THE UNITS IN WHICH  
INSTRUCTIONS ARE READ, AND A COMPILER, AN  
OPTIMIZATION APPARATUS, AN ASSEMBLER, A LINKER,  
A DEBUGGER AND A DISASSEMBLER FOR SUCH PROCESSOR


Attorney's  
Docket No.: NAK1-BG86

EXPRESS MAIL LABEL NO. EL180744630US

DATE OF DEPOSIT: April 28, 1999



FIG. 1

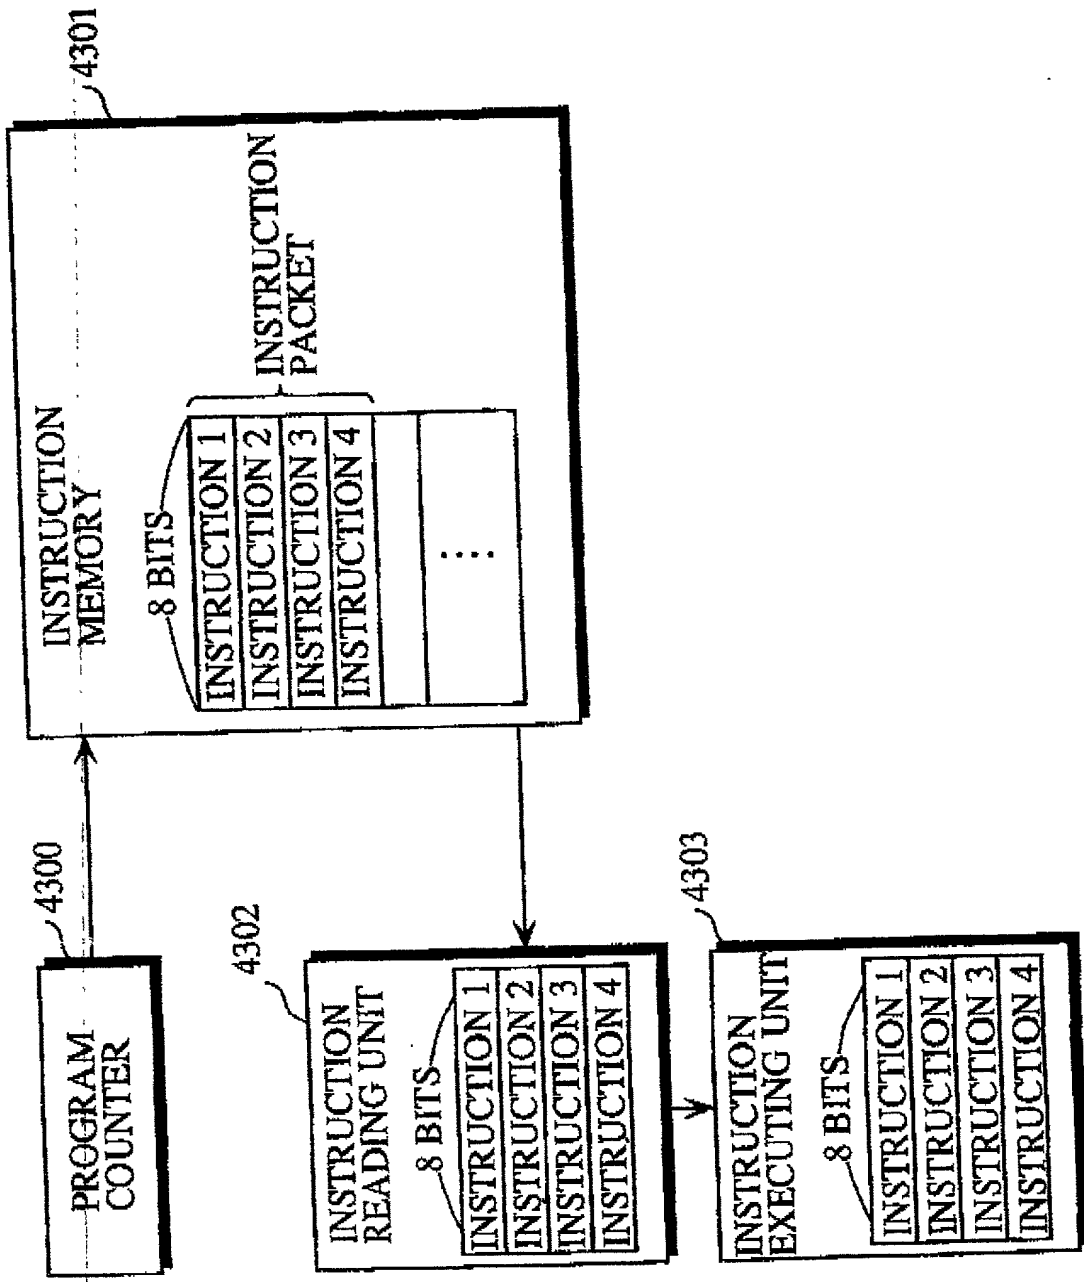

PARALLEL EXECUTION BOUNDARY INFORMATION 100

FORMAT INFORMATION 101

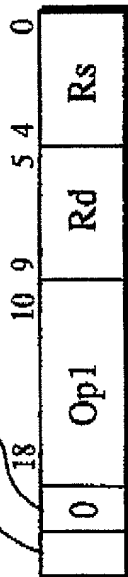


FIG. 2A

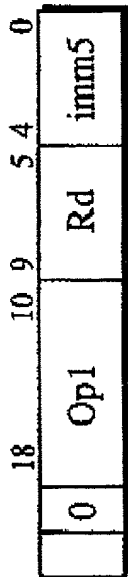


FIG. 2B

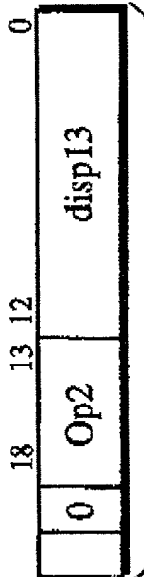


FIG. 2C

21 BITS

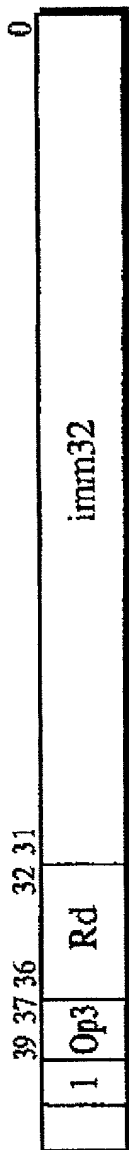


FIG. 2D

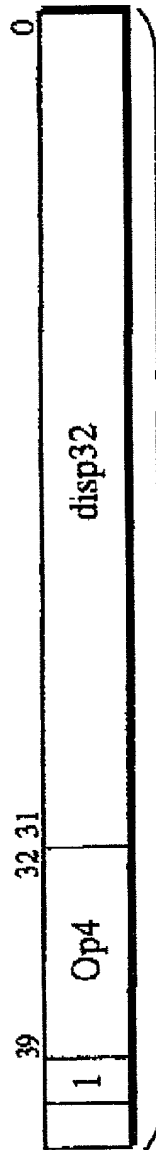


FIG. 2E

42 BITS

FIG. 3A

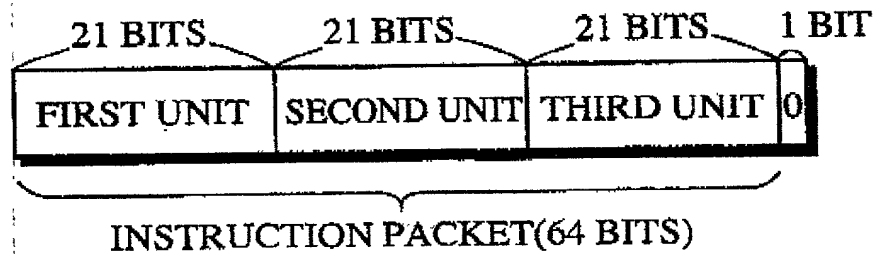


FIG. 3B

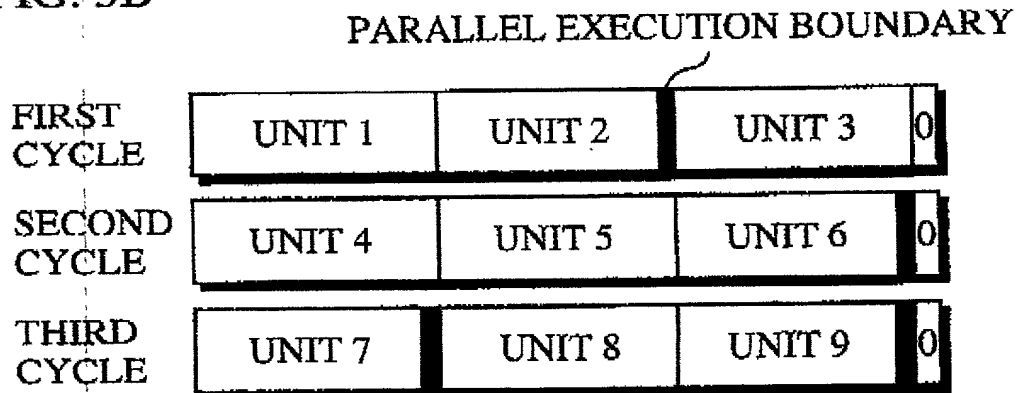


FIG. 3C

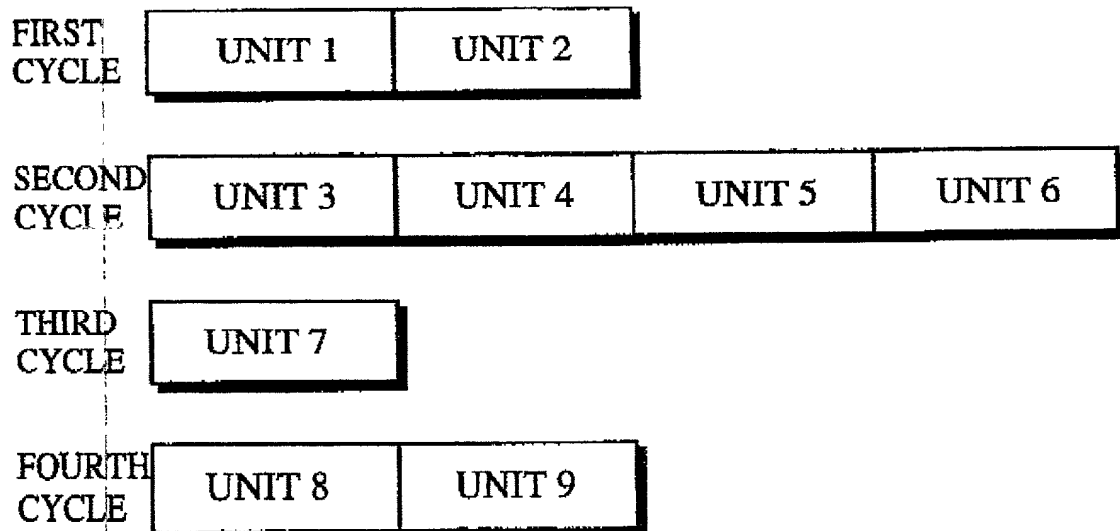


FIG. 4

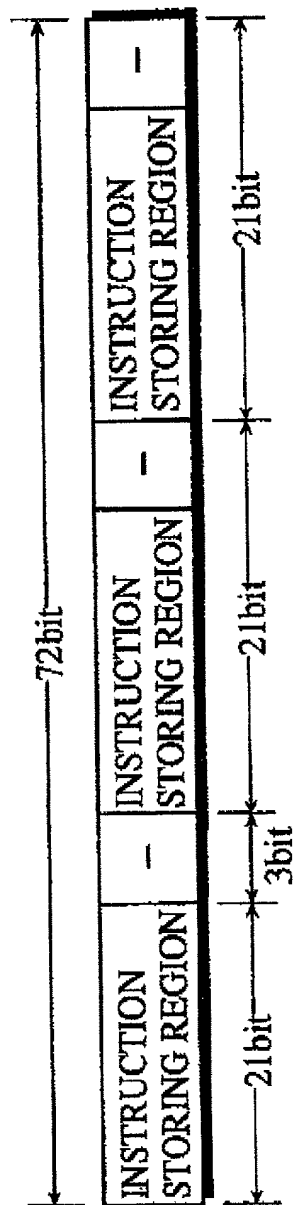


FIG. 5

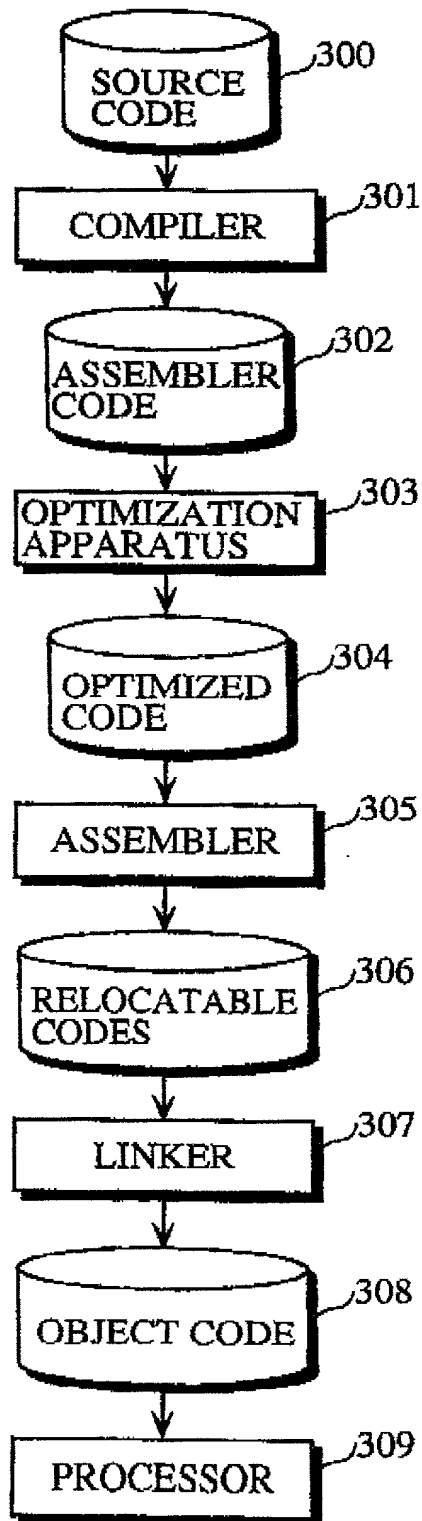


FIG. 6

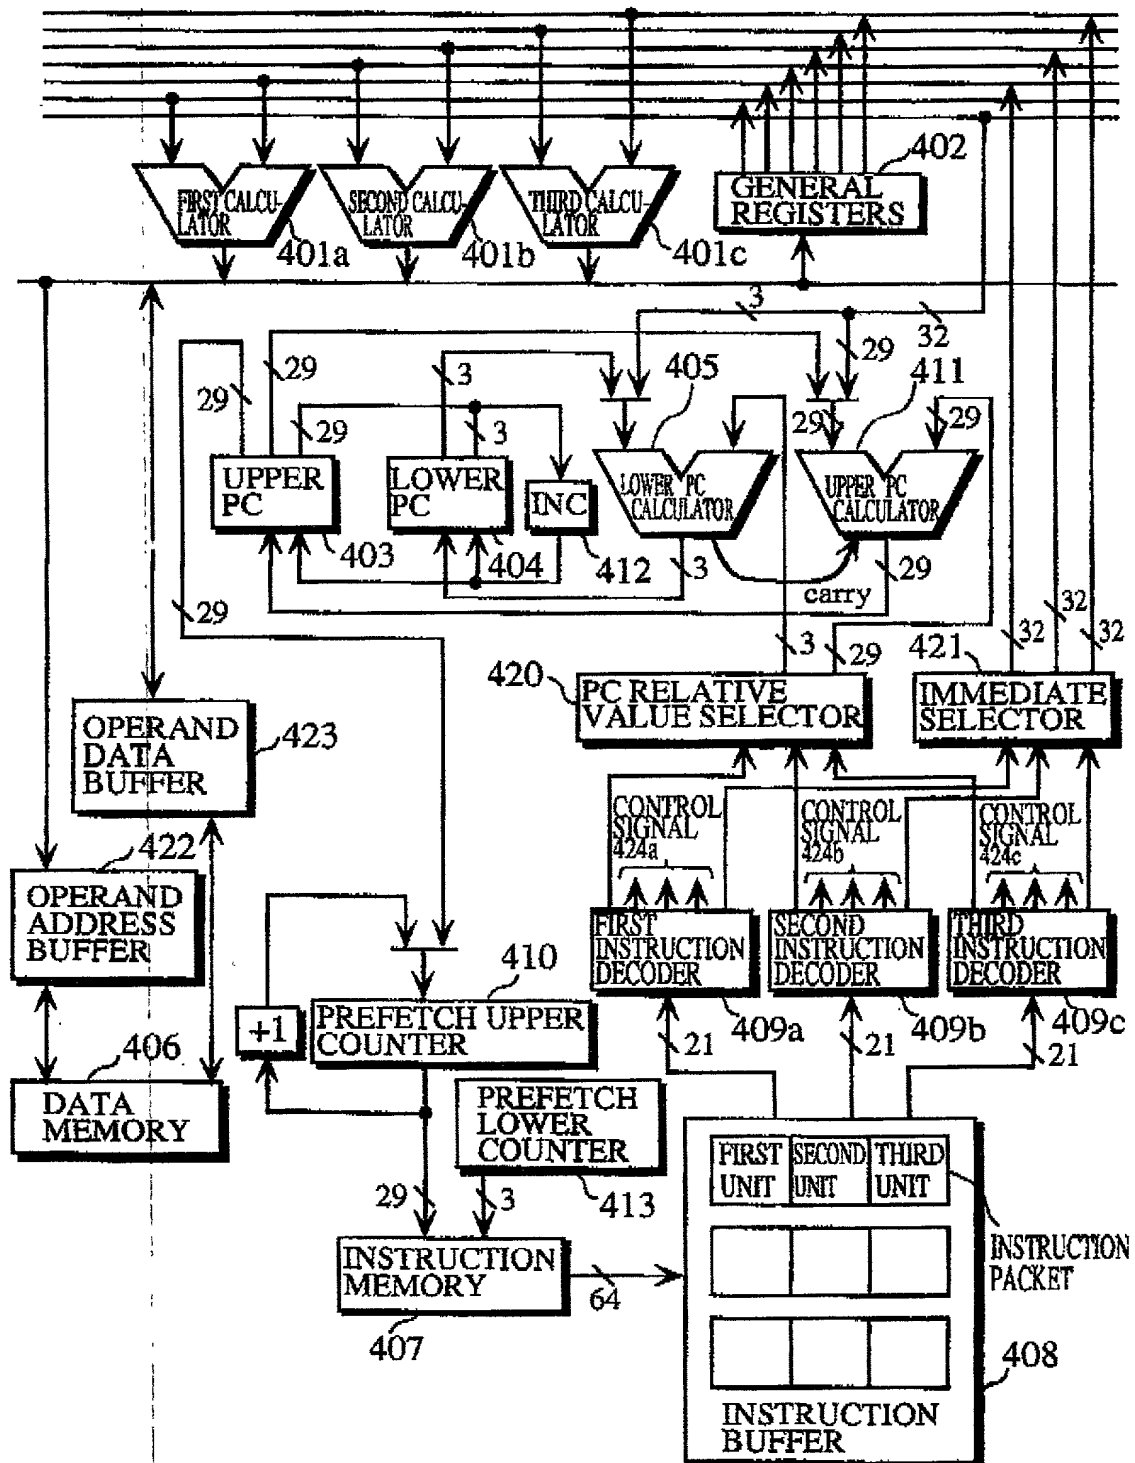


FIG. 7

IN-PACKET ADDRESS BEFORE UPDATING INCREMENT VALUE	3'b000	3'b010	3'b100
1	3'b010	3'b100	3'b000 (CARRY 1)
2	3'b100	3'b000 (CARRY 1)	3'b010 (CARRY 1)
3	3'b000 (CARRY 1)	3'b010 (CARRY 1)	3'b100 (CARRY 1)
4	3'b010 (CARRY 1)	3'b100 (CARRY 1)	3'b000 (CARRY 2)

FIG. 8A

LOWER 3 BITS OF PC RELATIVE VALUE	LOWER 3 BITS OF ADDRESS VALUE		
	3'b000	3'b010	3'b100
3'b000	3'b000	3'b010	3'b100
3'b010	3'b010	3'b100	3'b000 (CARRY 1)
3'b100	3'b100	3'b000 (CARRY 1)	3'b010 (CARRY 1)

FIG. 8B

LOWER 3 BITS OF ADDRESS VALUE(BEFORE SUBTRACTION)	LOWER 3 BITS OF ADDRESS VALUE(TO BE SUBTRACTED)		
	3'b00	0b010	0b100
3'b000	3'b000	3'b100 (CARRY 1)	3'b010 (CARRY 1)
3'b010	3'b010	3'b000	3'b100 (CARRY 1)
3'b100	3'b100	3'b010	3'b000



FIG. 9

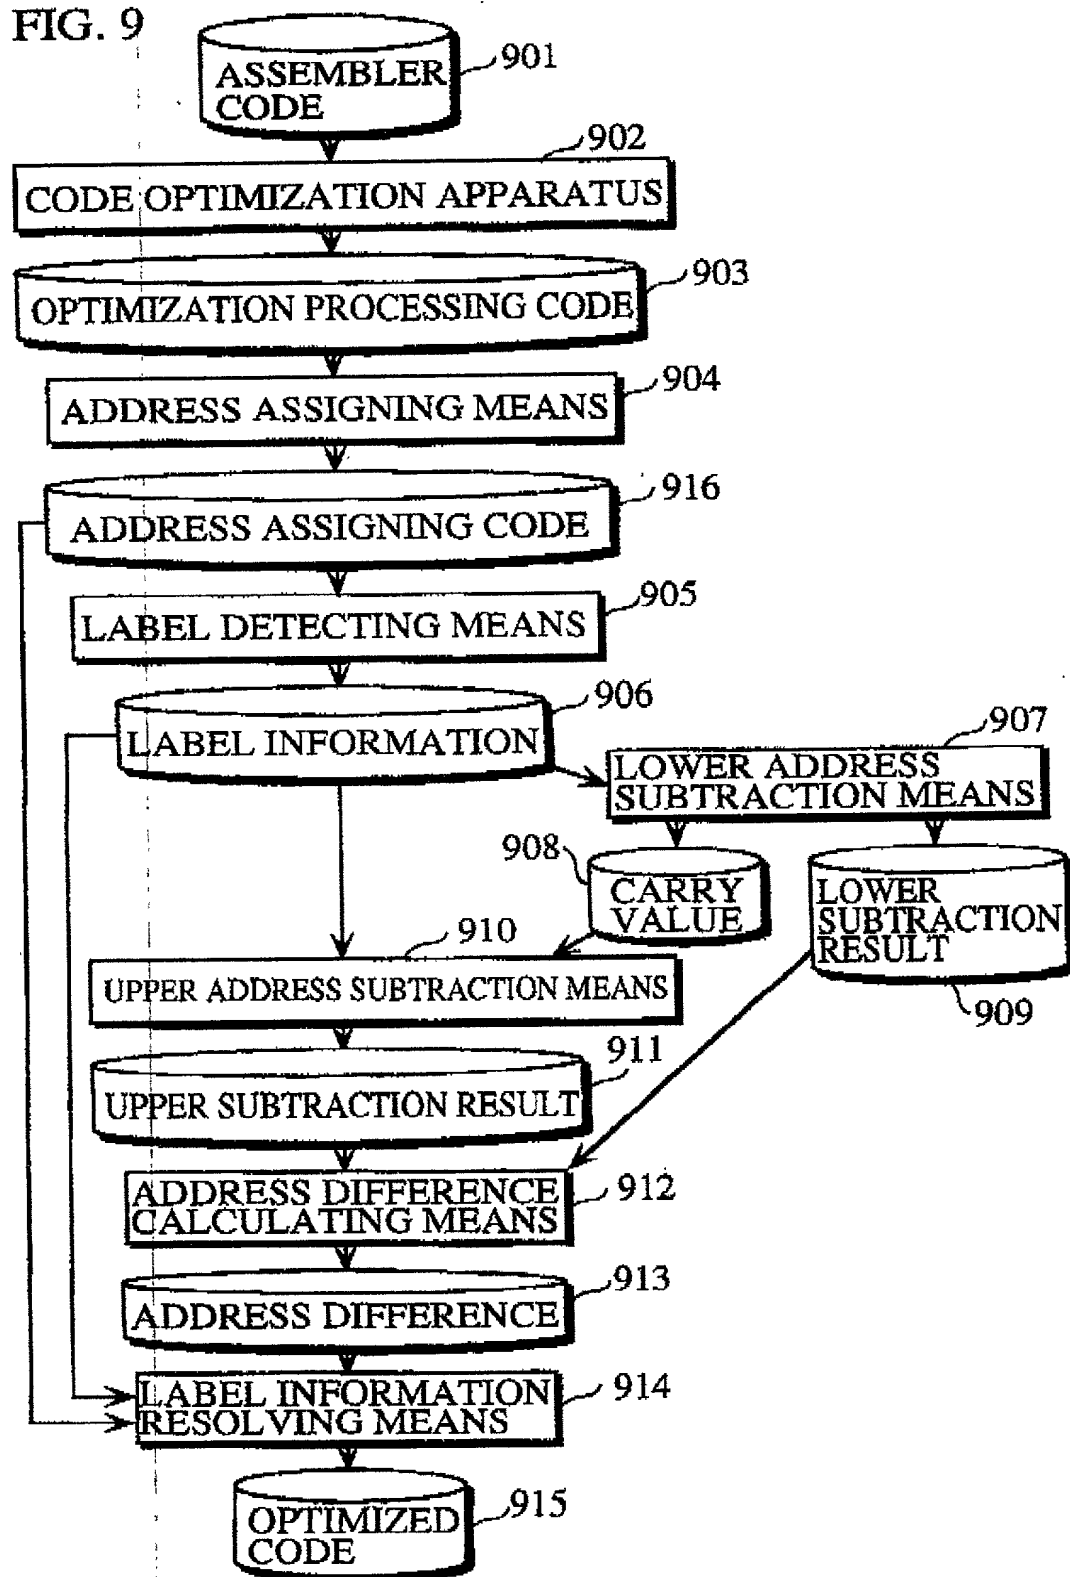


FIG. 10

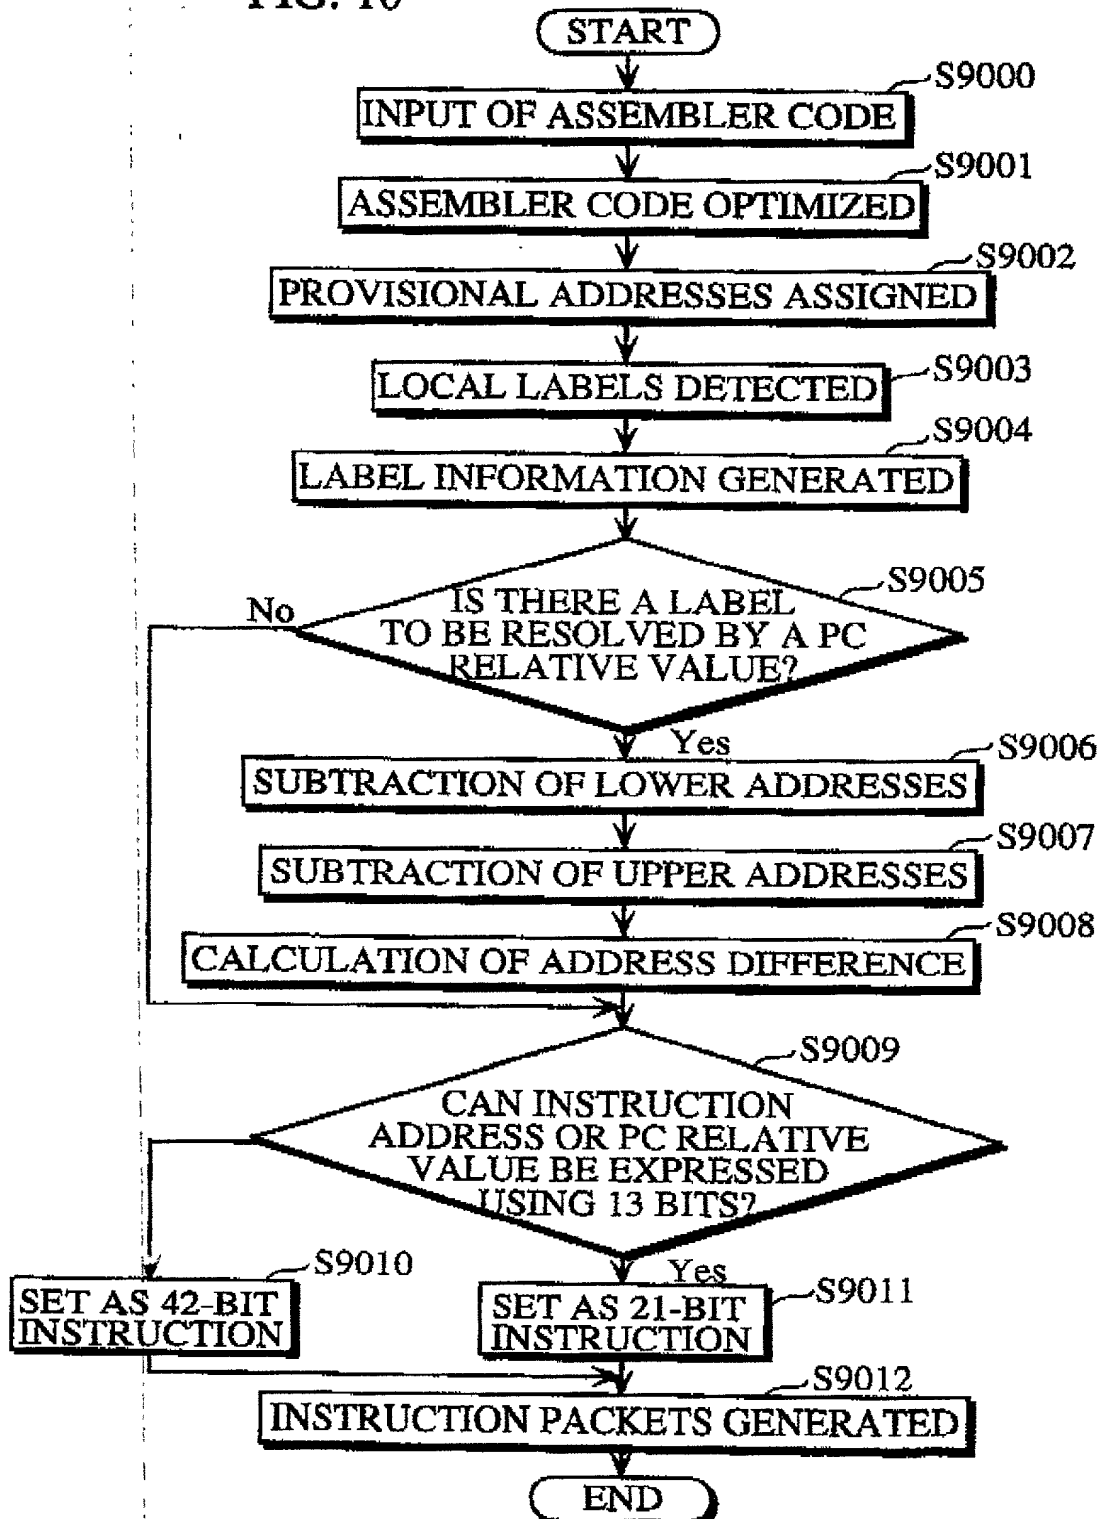


FIG. 11

L1: mov r2, r1	· · 1000
jsr f	· · 1001
add r0, r4	· · 1002
and r1, r3	· · 1003
mov L2, r2	· · 1004
ld (r2), r0	· · 1005
bra L1	· · 1006
add r2, r3	· · 1007
...	
L2: ...	· · 1008

FIG. 12

32'h00000800	L1: mov r2, r1	· · 1000
32'h00000802	jsr f	· · 1001
32'h00000804	add r0, r4	· · 1002
32'h00000808	and r1, r3	· · 1003
32'h0000080a	mov L2, r2	· · 1004
32'h00000810	ld (r2), r0	· · 1005
32'h00000812	bra L1	· · 1006
32'h00000814	add r2, r3	· · 1007
	...	
32'h12345678	L2: ...	· · 1008

FIG. 13

INSTRUCTION	RESOLVING VALUE
mov L2, r2	ADDRESS 32'h12345678
bra L1	PC RELATIVE VALUE 32'h00000800-32'h00000812

FIG. 14

L1:	mov r2, r1		jsr f		add r0, r4	• • 1300
	and r1, r3		mov L2, r2		(mov L2, r2)	• • 1301
	ld (r2), r0		bra L1		add r2, r3	• • 1302
	...					
L2:						• • 1303

FIG. 15

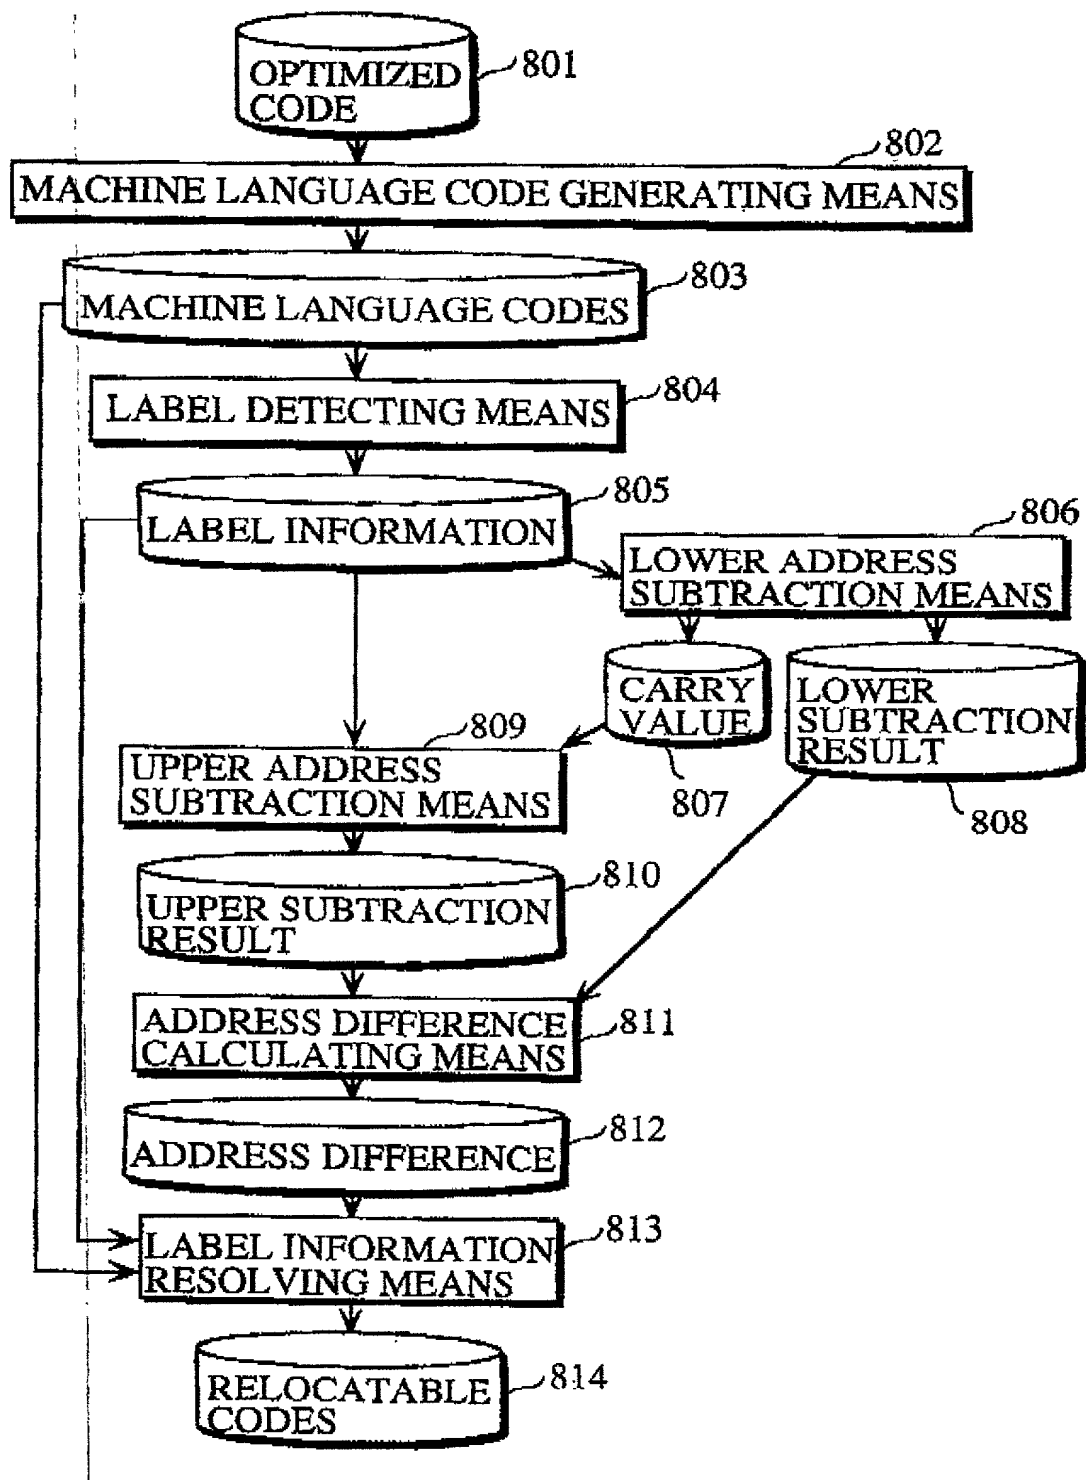


FIG. 16

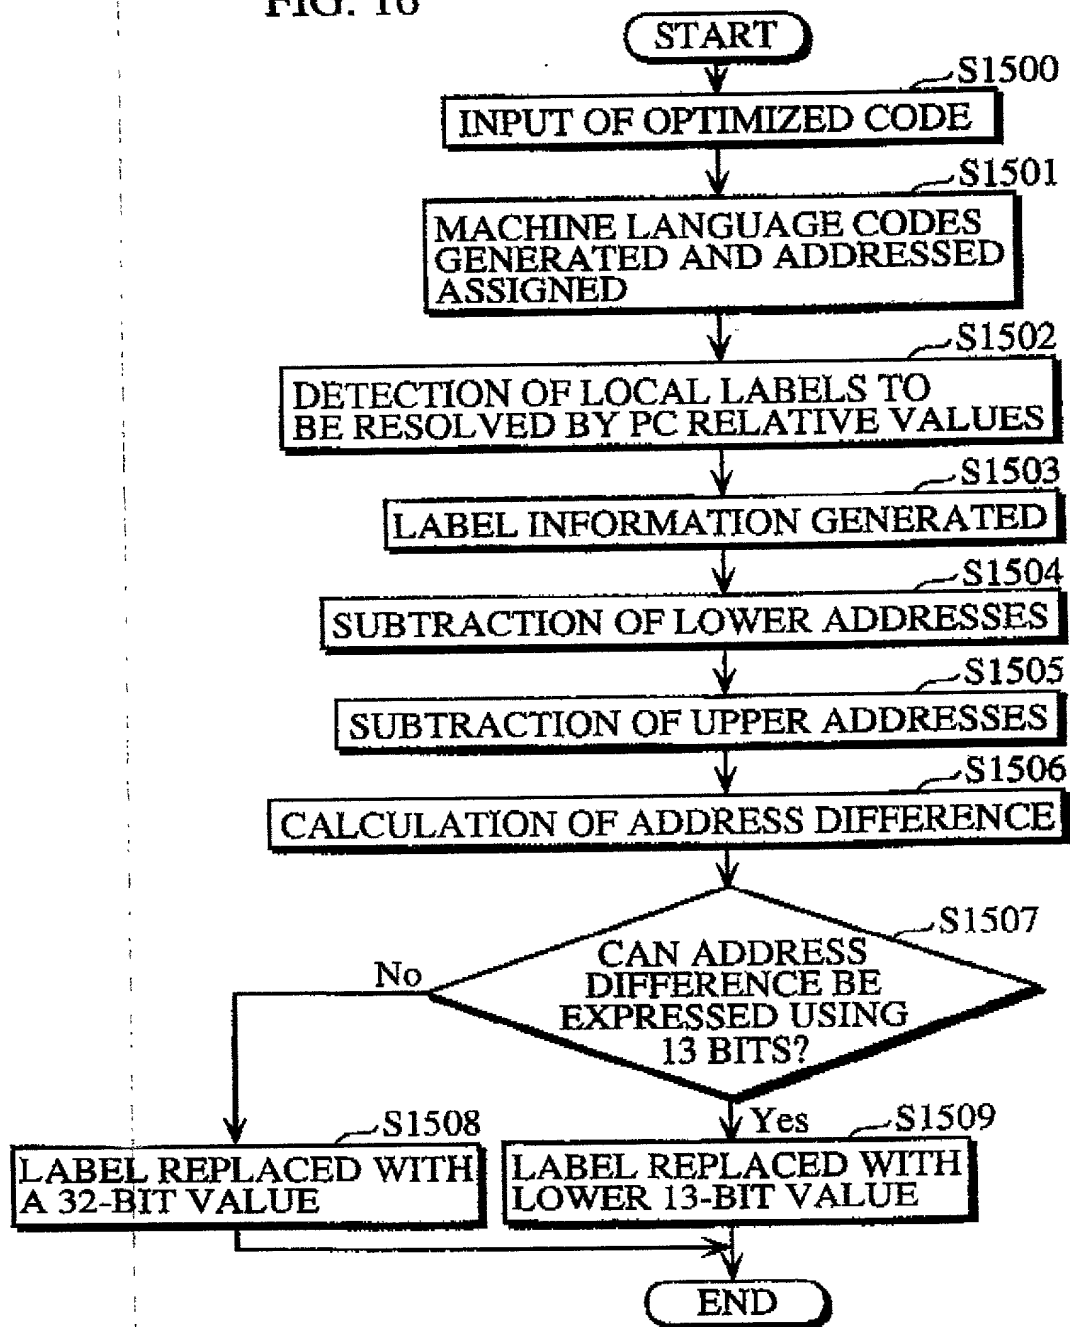


FIG. 17

29'h00000000	L1: mov r2, r1 ...1401	jsr f	...1402	add r0, r4 ...1403	. . 1400
29'h00000001	and r1, r3 ...1405	mov L2, r2	...1406		. . 1404
29'h00000002	ld (r2), r0 ...1408	bra L1	...1409	add r2, r3 ...1410	. . 1407
...					
29'h02468acf	L2: ...				. . 1411

FIG. 18

INSTRUCTION	RESOLVING VALUE
bra L1	PC RELATIVE VALUE 32'h00000000-32'h00000012



FIG. 19

PARALLEL EXECUTION BOUNDARY INFORMATION				BIT FORMAT INFORMATION				UNUSED BIT AREA					
29'h00000000	0:0	L1:	mov r2, r1	1:0	1601	1:0	jsr f	1602	0:0	add r0, r4	1603	0	1600
29'h00000001	0:0		and r1, r3	1:0	1605	1:1	mov L2, r2	1606				0	1604
29'h00000002	0:0		ld (r2), r0	1:0	1608	1:0	bra 13'h1fec	1609	0:0	add r2, r3	1610	0	1607
...													
29'h02468acf		L2:					...					0	1611

FIG. 20

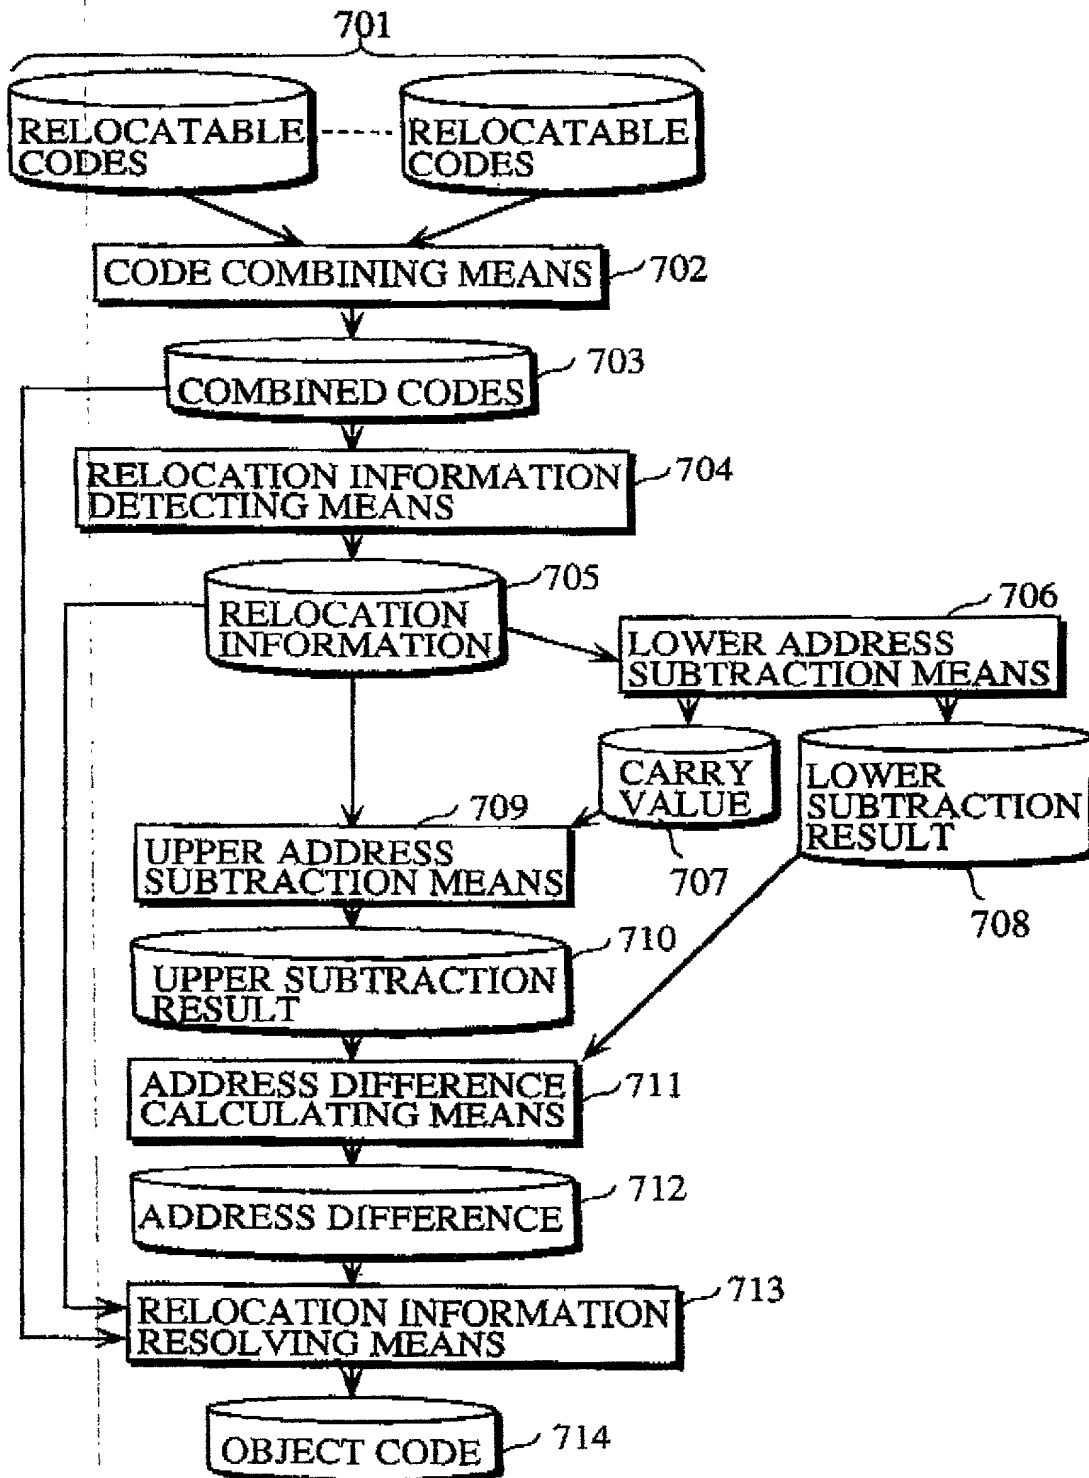


FIG. 21

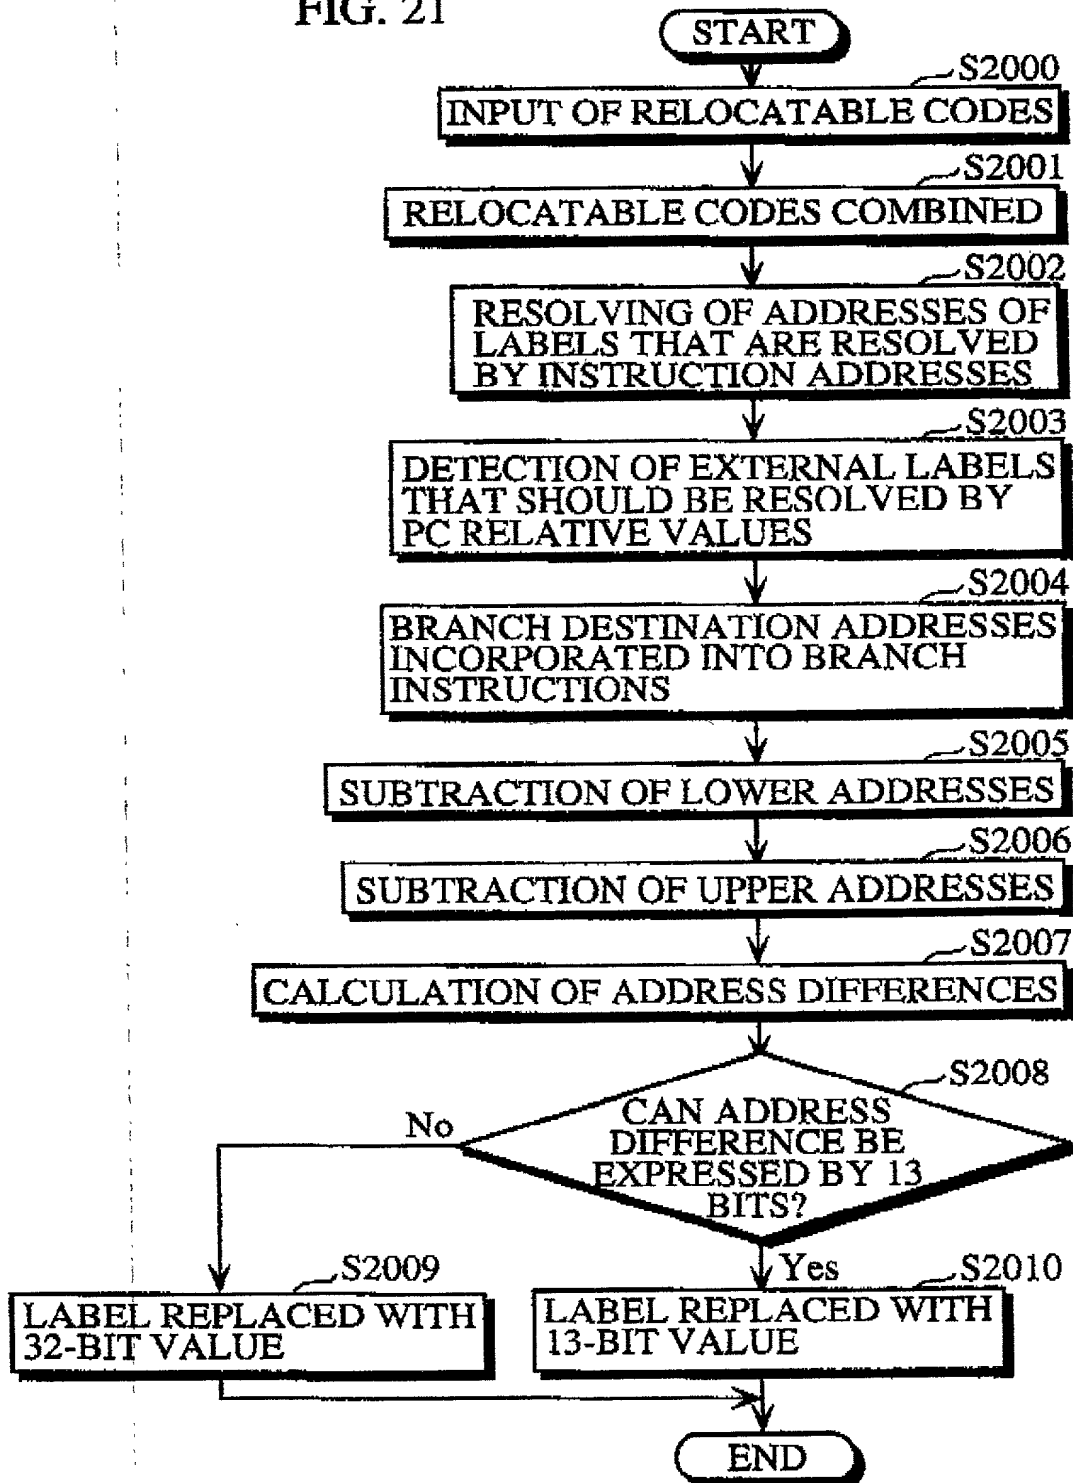


FIG. 22



FIG. 23

29'h00000000	0:0:f	ret	...1801	0:0:nop	...1802	1:0:nop	...1803	0	· · 1800
29'h00000001	0:0:L1:	mov r2, r1	...1805	1:0:jstr f	...1806	0:0: add r0, r4	...1807	0	· · 1804
29'h00000002	0:0:	and r1, r3	...1809	1:1:mov L2, r2	...1810			0	· · 1808
29'h00000003	0:0:	ld (r2), r0	...1812	1:0:bra 13'h1fec	...1813	0:0: add r2, r3	...1814	0	· · 1811
...									
29'h02468ad0	L2:		...					0	· · 1815



FIG. 25

INSTRUCTION	RESOLVING VALUE
jsr f	PC RELATIVE VALUE 32'h00000000-32'h0000000a

FIG. 26

29'h00000000	0:0:f:	ret	...2101	0:0:nop	...2102	1:0:nop	...2103	0	· · 2100
29'h00000001	0:0:L1:	mov r2, r1	...2105	1:0:jsr 13'h1ff4	...2106	0:0: add r0, r4	...2107	0	· · 2104
29'h00000002	0:0:	and r1, r3	...2109	1:1:mov 32'h12345680, r2	...2110	0		0	· · 2108
29'h00000003	0:0:	ld (r2), r0	...2112	1:0:bra 13'h1fec	...2113	0:0: add r2, r3	...2114	0	· · 2111
...									
29'h02468ad0	L2:	...						0	· · 2115





FIG. 28A

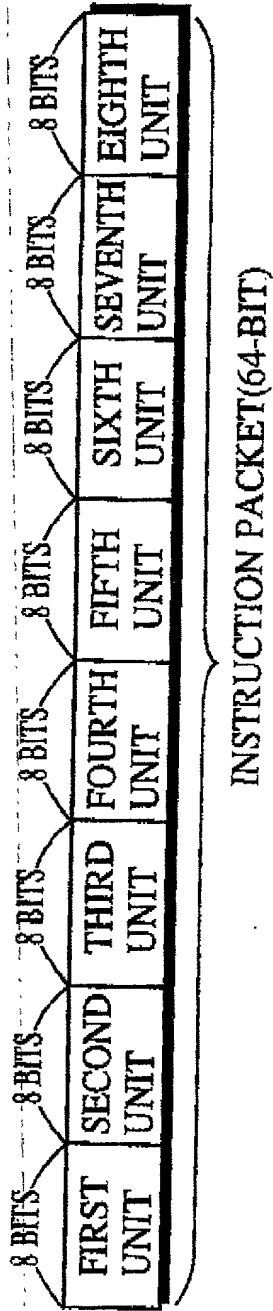


FIG. 28B

2-UNIT INSTRUCTION

3-UNIT INSTRUCTION

5-UNIT INSTRUCTION

6-UNIT INSTRUCTION

FIG. 28C

IN-PACKET ADDRESS	UNIT
3'b000	FIRST UNIT
3'b001	SECOND UNIT
3'b010	THIRD UNIT
3'b011	FOURTH UNIT
3'b100	FIFTH UNIT
3'b101	SIXTH UNIT
3'b110	SEVENTH UNIT
3'b111	EIGHTH UNIT

FIG. 29A

LOWER 3 BITS OF ADDRESS VALUE LOWER 3 BITS OF PC RELATIVE VALUE		3'b000	3'b010	3'b100
	3'b000	3'b000	3'b010	3'b100
	3'b010	3'b010	3'b100	3'b000 (CARRY IGNORED)
	3'b100	3'b100	3'b000 (CARRY IGNORED)	3'b010 (CARRY IGNORED)

FIG. 29B

LOWER 3 BITS OF ADDRESS VALUE (TO BE SUBTRACTED) LOWER 3 BITS OF ADDRESS VALUE (BEFORE BE SUBTRACTION)		3'b000	3'b010	3'b100
	3'b000	3'b000	3'b100 (CARRY IGNORED)	3'b010 (CARRY IGNORED)
	3'b010	3'b010	3'b000	3'b100 (CARRY IGNORED)
	3'b100	3'b100	3'b010	3'b000



US 2002/0127000 A1

FIG. 31A

LOWER 3 BITS OF PC RELATIVE VALUE	LOWER 3 BITS OF ADDRESS VALUE		
	3'b000	3'b010	3'b100
3'b000	3'b000	3'b000	3'b000
3'b010	3'b010	3'b010	3'b010
3'b100	3'b100	3'b100	3'b100

FIG. 31B


LOWER 3 BITS OF PC RELATIVE VALUE	LOWER 3 BITS OF ADDRESS VALUE		
	3'b000	0b010	0b100
3'b000	3'b000	3'b000	3'b000
3'b010	3'b010	3'b010	3'b010
3'b100	3'b100	3'b100	3'b100



FIG. 33

29'h00000000	0:0:f	ret	...2701	0:0:nop	...2702	1:0:nop	...2703	0	• • 2700
29'h00000001	0:0:L1	mov r2, r1	...2705	1:0:jsr 13'h1ff6	...2706	0:0: add r0, r4	...2707	0	• • 2704
29'h00000002	0:0	and r1, r3	...2709	1:1:mov 32'h12345680, r2	...2710			0	• • 2708
29'h00000003	0:0	ld (r2), r0	...2712	1:0:bra 13'h1fee	...2713	0:0: add r2, r3	...2714	0	• • 2711
...									
29'h02468ad0	L2:	...						0	• • 2715

FIG. 34

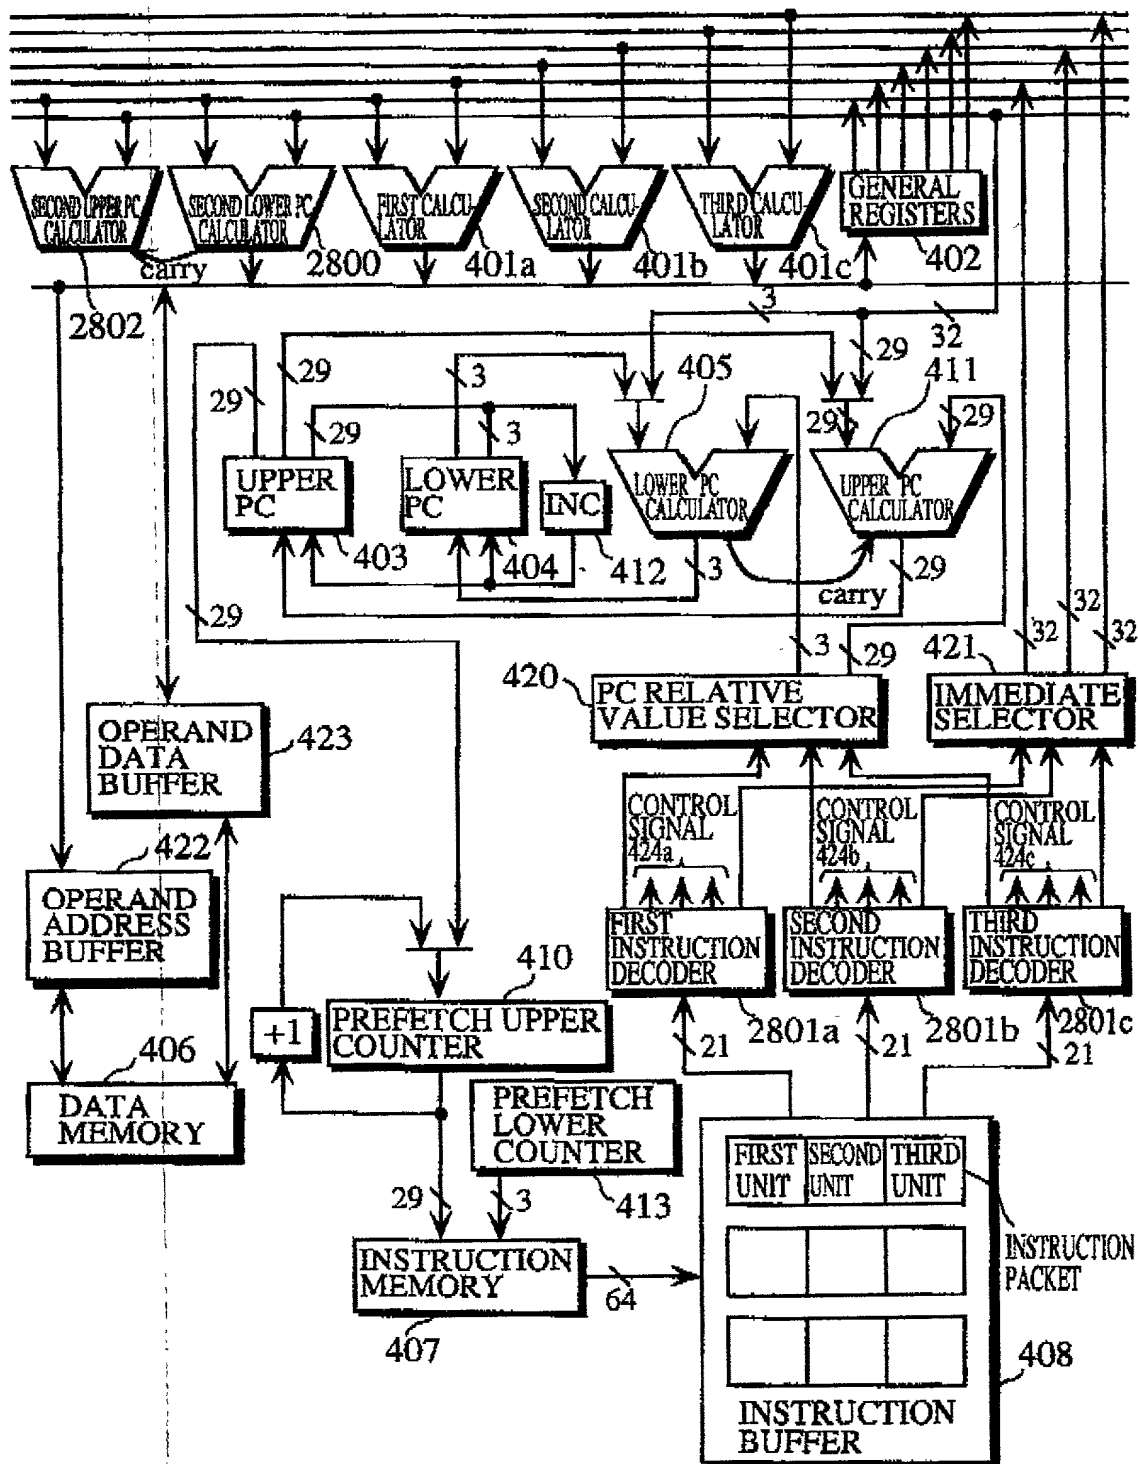



	MNEMONIC	OPERATION
FIG. 35A	addpc disp , Rn	$Rn + \text{disp} \rightarrow Rn$
FIG. 35B	subpc disp , Rn	$Rn - \text{disp} \rightarrow Rn$

FIG. 36

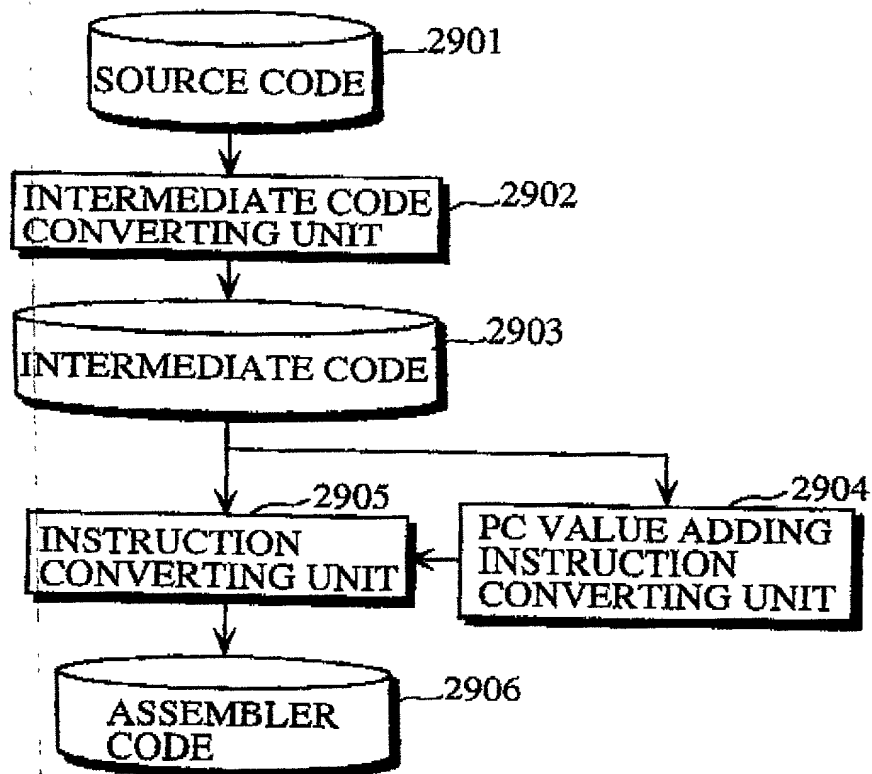


FIG. 37

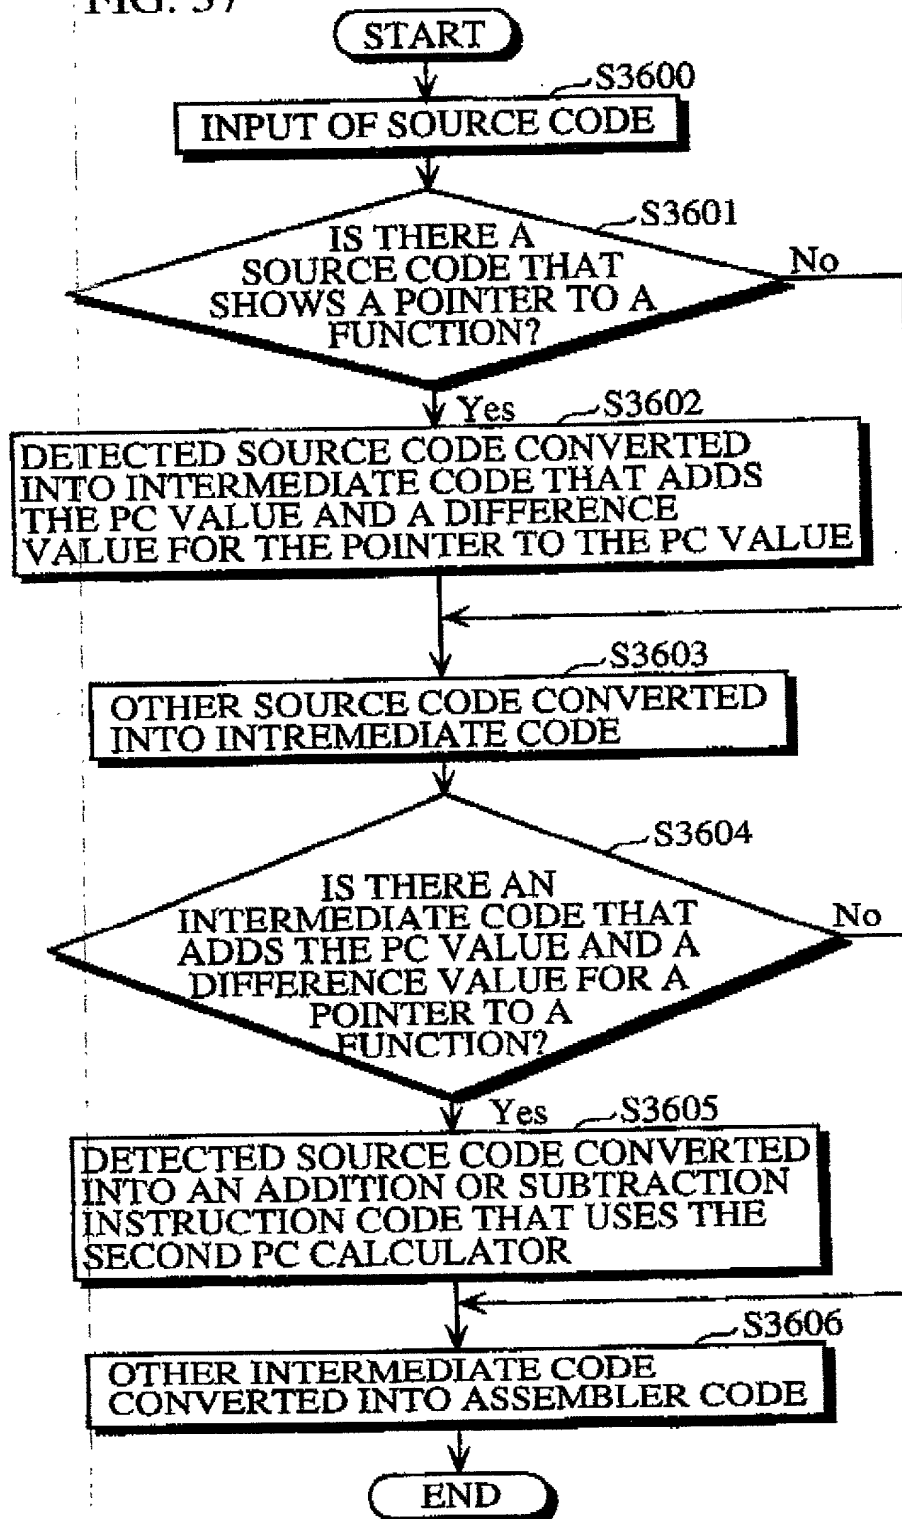


FIG. 38

```
extern int g1 ();
extern int g2 ();
extern int g3 ();
extern int g4 ();

f (int i)
{
    int (*fp) ();

    switch(i) {
        case 1 : fp = g1 ;
                break ;
        case 2 : fp = g2 ;
                break ;
        case 3 : fp = g3 ;
                break ;
        default : fp = g4 ;
    }

    (*fp) () ;
}
```

FIG. 39

f:	tmp = PC	3201
	i != 1	3202
	br L1	3203
	fp = (g1 - f) + tmp	3204
	jmp L	3205
L1:	i != 2	3206
	br L2	3207
	fp = (g2 - f) + tmp	3208
	jmp L	3209
L2:	i != 3	3210
	br L3	3211
	fp = (g3 - f) + tmp	3212
	jmp L	3213
L3:	fp = (g4 - f) + tmp	3214
L:	* (fp) (i)	3215

FIG. 40

f:	mov	PC, r1	3201
	compne	1, r0	3202
	br	L1	3203
	addpc	g1-f, r1	3204
	jmp	L	3205
L1:	compne	2, r0	3206
	br	L2	3207
	addpc	g2-f, r1	3208
	jmp	L	3209
L2:	compne	3, r0	3210
	br	L3	3211
	addpc	g3-f, r1	3212
	jmp	L	3213
L3:	addpc	g4-f, r1	3214
L:	jsr	(r1)	3215
	ret		3216



FIG. 42


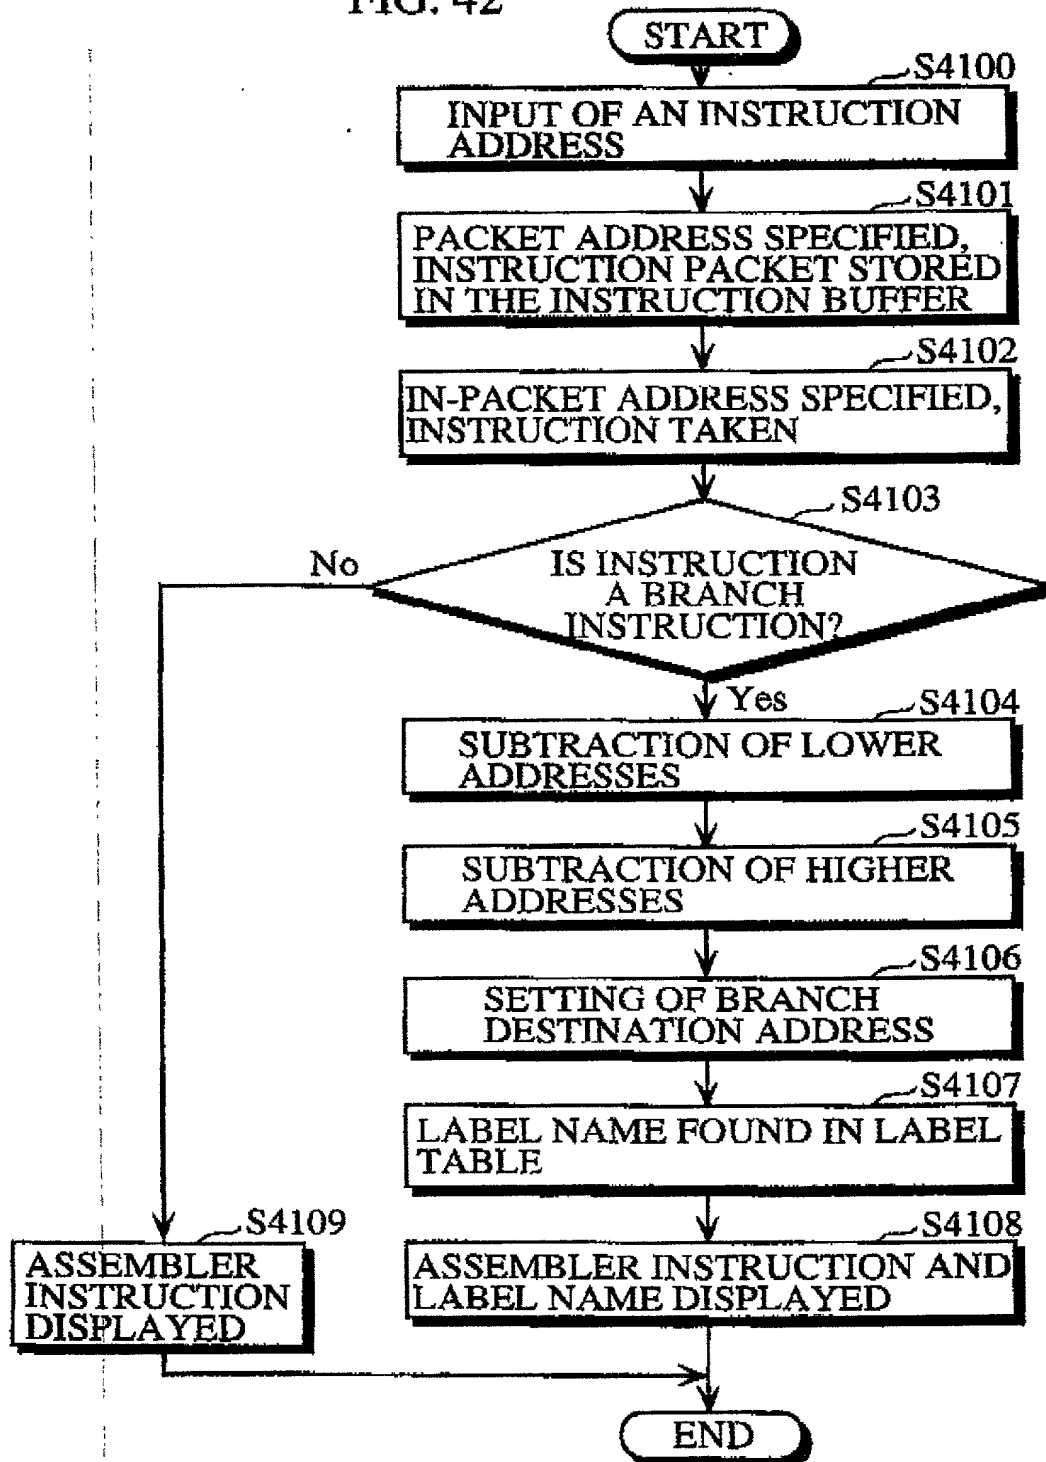


FIG. 43



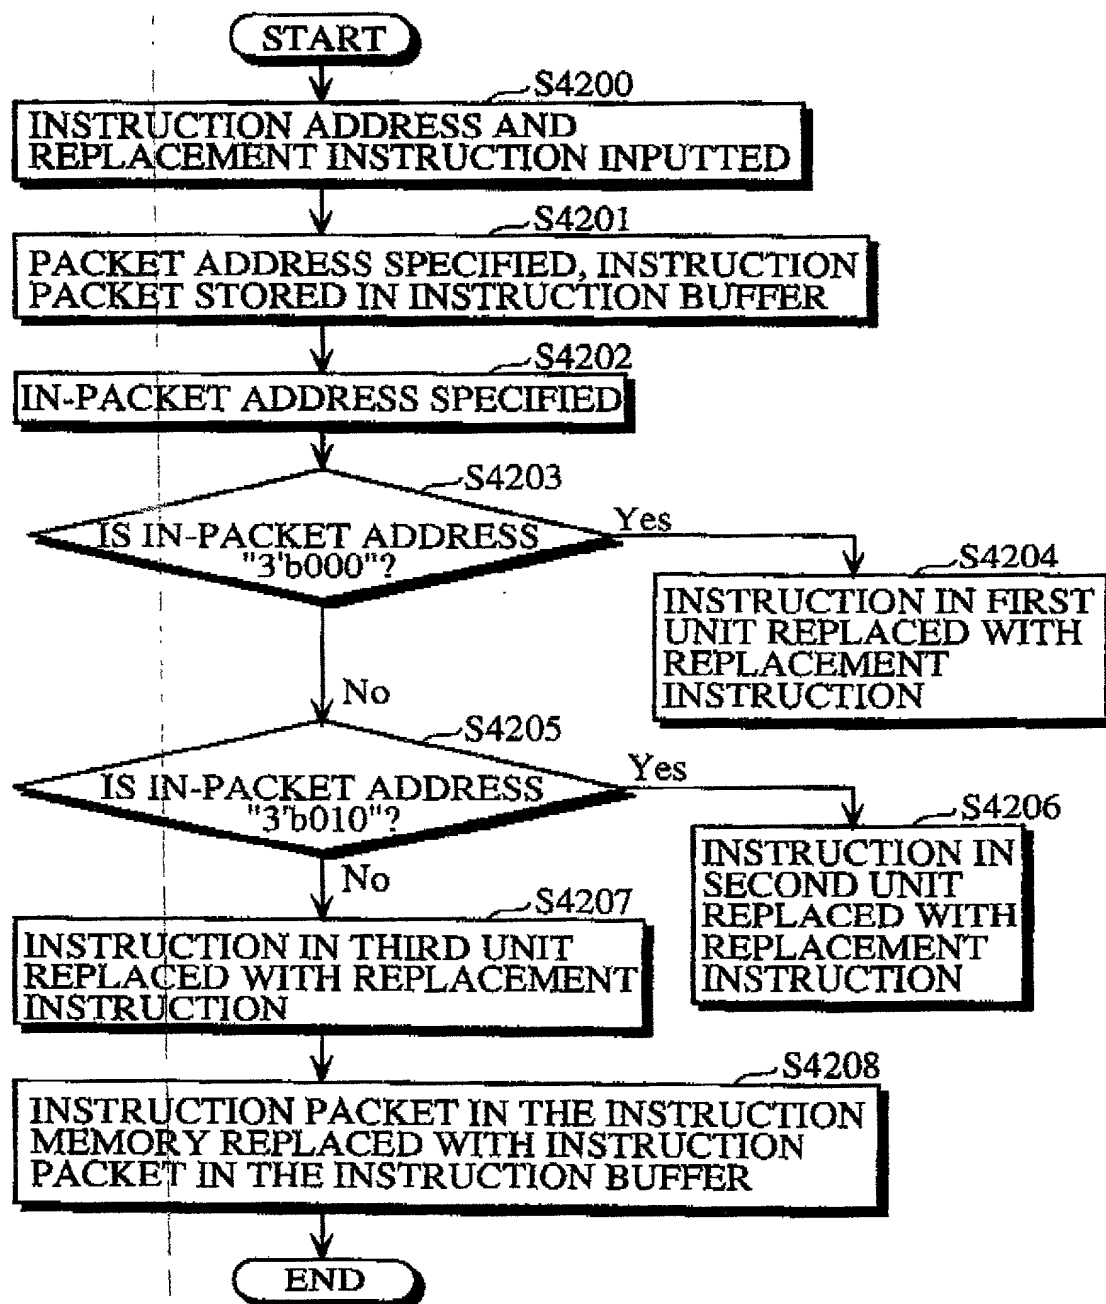

JOSEPH W PRICE  
ALBIN H. GESS  
FRANKLIN D. UBELL  
DOYLE B JOHNSON  
MICHAEL J. MOFFATT  
GORDON E GRAY III  
BRADLEY D BLANCHE

# PRICE, GESS & UBELL

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION  
TELEPHONE: (949) 261-8433  
FACSIMILE: (949) 261-9072  
FACSIMILE: (949) 261-1726

e-mail: [pgu@pgulaw.com](mailto:pgu@pgulaw.com)

**DECLARATION AND POWER OF ATTORNEY**  
**FOR PATENT APPLICATION**  
**(unexecuted)**

Inventor(s): Shuichi Takayama et al.

Title: A PROCESSOR FOR EXECUTING INSTRUCTIONS IN  
UNITS THAT ARE UNRELATED TO THE UNITS IN WHICH  
INSTRUCTIONS ARE READ, AND A COMPILER, AN  
OPTIMIZATION APPARATUS, AN ASSEMBLER, A LINKER,  
A DEBUGGER AND A DISASSEMBLER FOR SUCH PROCESSOR

Attorney's  
Docket No.: NAK1-BG86

**EXPRESS MAIL LABEL NO. EL180744630US**

**DATE OF DEPOSIT: April 28, 1999**

COMBINED DECLARATION AND POWER OF ATTORNEY  
IN ORIGINAL APPLICATION

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought, entitled:

A PROCESSOR FOR EXECUTING INSTRUCTIONS IN UNITS THAT ARE UNRELATED TO THE UNITS IN WHICH INSTRUCTIONS ARE READ AND A COMPILER, AN OPTIMIZATION APPARATUS, AN ASSEMBLER, A LINKER, A DEBUGGER AND A DISASSEMBLER FOR SUCH PROCESSOR

the specification of which:

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Foreign application(s), if any, for Patent or Inventor's Certificate Filed Within 12 Months Prior to the Filing Date of This Application:

Country	Application No.	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. 119	
JAPAN	10-118326	April 28, 1998	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
			Yes <input type="checkbox"/>	No <input type="checkbox"/>
			Yes <input type="checkbox"/>	No <input type="checkbox"/>
			Yes <input type="checkbox"/>	No <input type="checkbox"/>
			Yes <input type="checkbox"/>	No <input type="checkbox"/>
			Yes <input type="checkbox"/>	No <input type="checkbox"/>

All Foreign Applications, if any, for Patent or Inventor's Certificate Filed More Than 12 Months Prior to the Filing Date of This Application:

Country	Application No.	Date of Filing

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in a manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Joseph W. Price (Reg. 25,124)  
Franklin D. Ubell (Reg. 27,009)  
Albin H. Gess (Reg. 25,726)  
Gordon E. Gray, III (Reg. 42,602)

Doyle B. Johnson (Reg. 39,240)  
Michael J. Moffatt (Reg. 39,304)  
Bradley D. Blanche (Reg. 38,387)

Send Correspondence To:

PRICE, GESS & UBELL  
2100 S.E. Main Street, Suite 250  
Irvine, California 92614  
Telephone: 949/261-8433

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment or both (18 U.S.C. 1001) and may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Shuichi TAKAYAMA		INVENTOR'S SIGNATURE	DATE
RESIDENCE 1-22-6 Nakayamadai, Takarazuka-shi, Hyogo-ken 665-0876 JAPAN		CITIZENSHIP Japanese	
POST OFFICE ADDRESS Same as Above			
FULL NAME OF SECOND JOINT INVENTOR, IF ANY Hajime OGAWA		INVENTOR'S SIGNATURE	DATE
RESIDENCE 22-7 Korinishinocho, Neyagawa-shi Osaka-fu 572-0089 JAPAN		CITIZENSHIP Japanese	
POST OFFICE ADDRESS Same as Above			
FULL NAME OF THIRD JOINT INVENTOR, IF ANY Kenichi KAWAGUCHI		INVENTOR'S SIGNATURE	DATE
RESIDENCE 5-5-1-208 Uozakiminamimachi, Higashinada-ku, Kobe-shi Hyogo-ken 658-0025 JAPAN		CITIZENSHIP Japanese	
POST OFFICE ADDRESS Same As Above			
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY Nobuo HIGAKI		INVENTOR'S SIGNATURE	DATE
RESIDENCE Shining-Sato 2H, 4-15-26, Komatsu, Higashiyodogawa-ku Osaka-shi, Osaka-fu 533-0004 JAPAN		CITIZENSHIP Japanese	
POST OFFICE ADDRESS Same As Above			
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY Kensuke ODANI		INVENTOR'S SIGNATURE	DATE
RESIDENCE 34 Shimotorida-cho, Murasakino, Kita-ku, Kyoto-shi, Kyoto-fu 603-8175 JAPAN		CITIZENSHIP Japanese	
POST OFFICE ADDRESS Same As Above			
FULL NAME OF SIXTH JOINT INVENTOR, IF ANY Tetsuya TANAKA		INVENTOR'S SIGNATURE	DATE
RESIDENCE 2-4-1-302 Kuragakiuchi, Ibaraki-shi, Osaka-fu 567-0878 JAPAN		CITIZENSHIP Japanese	
POST OFFICE ADDRESS Same as Above			

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Joseph W. Price (Reg. 25,124)  
Franklin D. Ubell (Reg. 27,009)  
Albin H. Gess (Reg. 25,726)  
Gordon E. Gray, III (Reg. 42,602)

Doyle B. Johnson (Reg. 39,240)  
Michael J. Moffatt (Reg. 39,304)  
Bradley D. Blanche (Reg. 38,387)

Send Correspondence To:

PRICE, GESS & UBELL  
2100 S.E. Main Street, Suite 250  
Irvine, California 92614  
Telephone: 949/261-8433

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment or both (18 U.S.C. 1001) and may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SEVENTH JOINT INVENTOR Shinya MIYAJI		INVENTOR'S SIGNATURE		DATE
RESIDENCE 46-2-205, Yamadaikehigashimachi, Hirakata-shi Osaka-fu 573-0165 JAPAN		CITIZENSHIP Japanese		
POST OFFICE ADDRESS Same As Above				
FULL NAME OF EIGHTH JOINT INVENTOR Taketo HEISHI		INVENTOR'S SIGNATURE		DATE
RESIDENCE 1-3-1-701, Higashiawaji, Higashiyodogawa-ku, Osaka-shi, Osaka-fu 571-8501 JAPAN		CITIZENSHIP Japanese		
POST OFFICE ADDRESS Same As Above				
FULL NAME OF JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE		CITIZENSHIP		
POST OFFICE ADDRESS				
FULL NAME OF JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE		CITIZENSHIP		
POST OFFICE ADDRESS				
FULL NAME OF JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE		CITIZENSHIP		
POST OFFICE ADDRESS				
FULL NAME OF JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE		CITIZENSHIP		
POST OFFICE ADDRESS				